




**ATD-10514**

# 14" Portable Cut-off

## INSTRUCTION MANUAL

 **DOUBLE  
INSULATION**



### **SPECIFICATIONS:**

120V AC 60Hz 15Amps

Wheel diameter : 355mm (14")

Hole diameter : 25.4mm (1")

No-load speed: 3800 rpm

Net weight: 16.3kg (35.9lbs)

Dimensions (L x W x H): 50cm x 28cm x 60cm (19-11/16 " x 11" x 23-5/8")

• **Manufacturer reserves the right to change specifications without notice.**

# **WARNING**

**Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:**

- **lead from lead-based paints,**
- **crystalline silica from bricks and cement and other masonry products, and**
- **arsenic and chromium from chemically-treated lumber.**

**Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.**

## Power supply

The machine should be connected only to a power supply of the same voltage as indicated on the nameplate, and can only be operated on single-phase AC supply. They are double-insulated in accordance with European Standard and can, therefore, also be used from sockets without earth wire.

## SAFETY INSTRUCTIONS

Warning! When using electric machines, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury, including the following.

Read all these instructions before attempting to operate this product and save these instructions.

For safe operation:

1. Keep work area clean  
Cluttered areas and benches invite injuries.
2. Consider work area environment  
Don't expose power machines to rain. Don't use power machines in damp or wet locations. Keep work area well lit. Don't use power machines in presence of flammable liquids or gases.
3. Guard against electric shock  
Prevent body contact with grounded surfaces (e. g. pipes, radiators, ranges refrigerators).
4. Keep children away  
Do not let visitors contact machine or extension cord. All visitors should be kept away from work area.
5. Store idle machines  
When not in use, machines should be stored in dry, high, or locked-up place, out of the reach of children.
6. Don't force machine  
It will do the job better and safer at the rate for which it was intended.
7. Use right machine  
Don't force small machines or attachments to do the job of a heavy duty machine. Don't use machines for purposes not intended; for example don't use circular saw for cutting tree limbs or logs.
8. Dress properly  
Do not wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.
9. Use safety glasses  
Also use face or dust mask if cutting operation is dusty.
10. Don't abuse cord  
Never carry machine by cord or yank it to disconnect it from receptacle. Keep cord from heat, oil and sharp edges.



11. Secure work  
Use clamps or a vise to hold work. It's safer than using your hand and it frees both hands to operate machine.
12. Don't overreach  
Keep proper footing and balance at all times.
13. Maintain machines with care  
Keep machines sharp and clean for better and safer performance. Follow instructions for lubricating and changing accessories. Inspect machine cords periodically and, if damaged, have repaired by, authorized service facility. Inspect extension cords periodically and replace if damaged. Keep handles dry, clean and free from oil and grease.
14. Disconnect machines  
When not in use, before servicing, and when changing accessories such as blades, bits and cutters.
15. Remove adjusting keys and wrenches  
Form the habit of checking to see that keys and adjusting wrenches are removed from machine before turning it on.
16. Avoid unintentional starting  
Don't carry plugged-in machine with finger on switch. Be sure switch is off when plugging in.
17. Outdoor use extension cords  
When machine is used outdoors, use only extension cords intended for use outdoors and so marked
18. Stay alert  
Watch what you are doing. Use common sense. Do not operate machine when you are tired.
19. Check damaged parts  
Before further use of the machine, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated elsewhere in this instruction manual. Have defective switches replaced by an authorized service center. Do not use machine if switch does not turn it on and off.
20. Warning  
The use of any other accessory or attachment other than recommended in this operating instruction or the catalog may present a risk of personal injury.
21. Have your machine repaired by an expert  
This electric appliance is in accordance with the relevant safety rules. Repairing of electric appliances may be carried out only by experts otherwise it may cause considerable danger for the user.

## ADDITIONAL SAFETY RULES

1. Wear hearing protection during extended periods of operation.
  2. Use only wheels having maximum operating speed at least as high as "No Load RPM" marked on the tool's nameplate. Use only fiberglass - reinforced cut- off wheels.
  3. Check the wheel carefully for cracks or damage before operation. Replace cracked or damaged wheel immediately.
  4. Secure the wheel carefully.
  5. Use only flanges specified for this tool.
  6. Be careful not to damage the spindle, flanges (especially the installing surface) or bolt, or the wheel itself might break.
  7. Keep guards in place and in working order.
  8. Hold the handle firmly.
  9. Keep hands away from rotating parts.
  10. Make sure the wheel is not contacting the workpiece before the switch is turned on.
  11. Before using the tool on an actual workpiece, let it simply run for several minutes first. Watch for flutter or excessive vibration that might be caused by poor installation or a poorly balanced wheel.
  12. Watch out for flying sparks when operating. They can cause injury or ignite combustible materials.
  13. Remove material or debris from the area that might be ignited by sparks. Be sure that others are not in the path of the sparks. Keep a proper, charged fire extinguisher closely available.
  14. Use the cutting edge of the wheel only. Never use side surface.
  15. If the wheel stops during the operation, makes an odd noise or begins to vibrate, switch off the tool immediately.
  16. Always switch off and wait for the wheel to come to a complete stop before removing, securing workpiece, working vise, changing work position, angle or the wheel itself.
  17. Do not touch the workpiece immediately after operation; it is extremely hot and could burn your skin.
  18. Store wheels in a dry location only.
- SAVE THESE INSTRUCTINS.



## Removing or Installing cut-off wheel

### CAUTION



Always be sure that the tool is switched off and unplugged before removing or installing the wheel.

To remove the wheel, loosen the screw and raise the center cover (center cap) Press the shaft lock so that the wheel cannot revolve and use the socket wrench to loosen the hex bolt by turning it counterclockwise Then remove the hex bolt, outer flange and wheel (Note. Do not remove the inner flange, ring and O-ring.)

To install the wheel, follow the removal procedures in reverse.

### CAUTION:


- Be sure to tighten the hex bolt securely. Insufficient tightening of the hex bolt may result in severe injury. Use the socket wrench provided to help assure proper tightening.
- Always use only the proper inner and outer flanges which are provided with this tool
- Always secure the center cover (center cap) firmly after replacing the wheel.

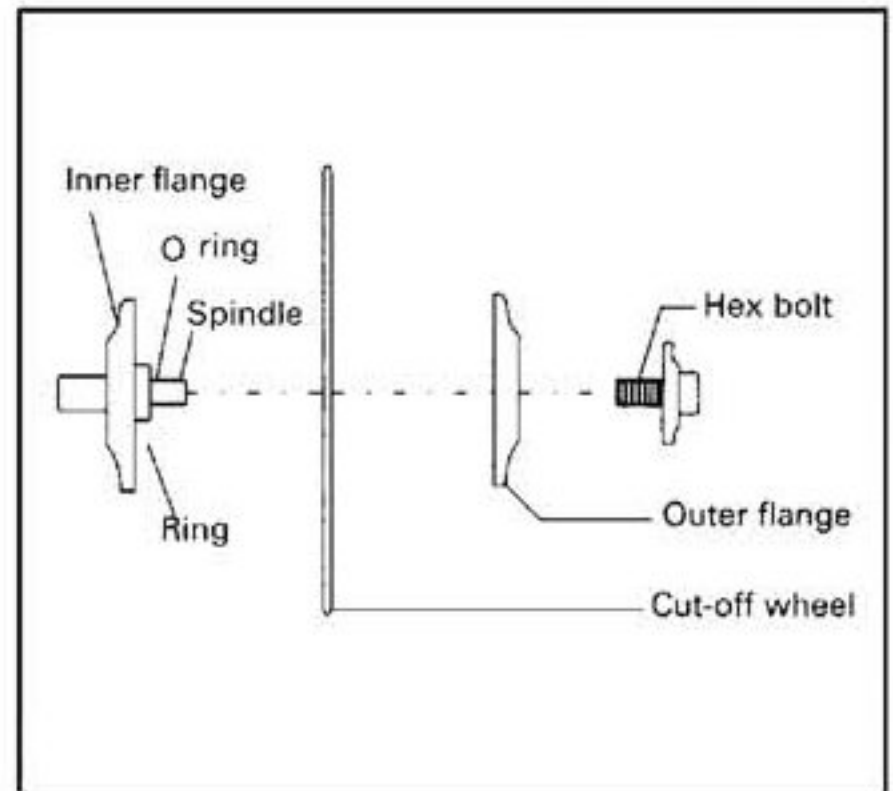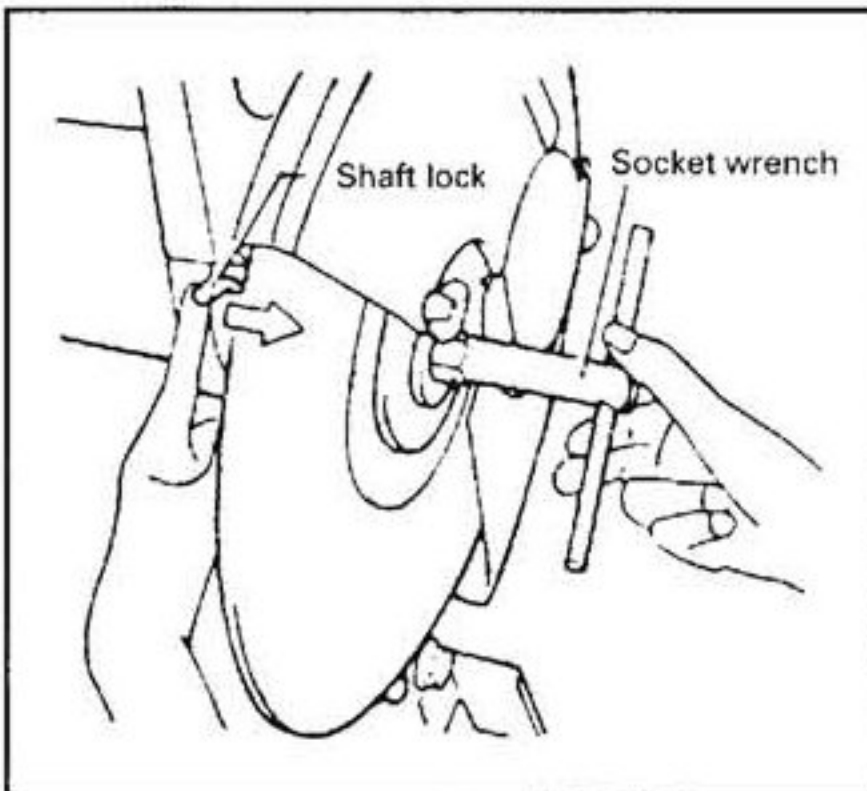

### Spark guard


The spark guard is factory-installed with its lower edge contacting the base. Before operation, loosen the screw and raise the spark guard so that its lower edge will be positioned approx. 45mm (1-3/4") above the workbench or floor surface.

Otherwise sparks may fly around operation area.

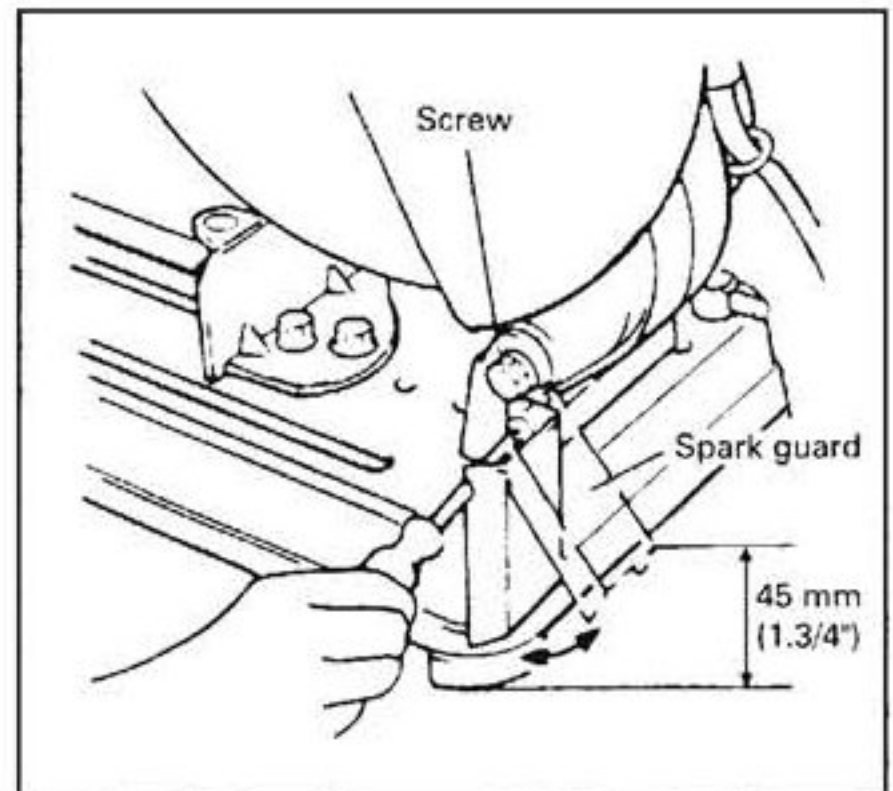

### Stopper plate

The stopper plate prevents the wheel from contacting the workbench or floor surface. When a new wheel is installed, set the stopper plate to the position (A). When the wheel wears down to below 330mm (13") in diameter, set the stopper plate to the position (B) to allow an increased cutting capacity with the worn down wheel.

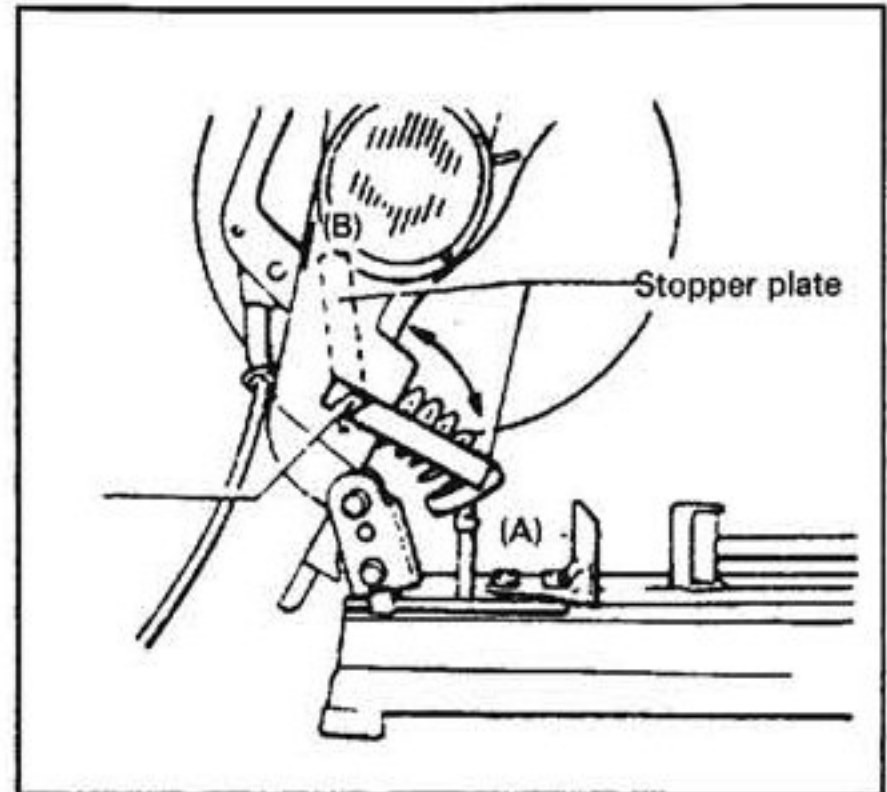



### Interval between vise and guide plate

The original spacing or interval between the vise and the guide plate is 0—170mm (0—6 11/16"). If your work requires wider spacing or interval, proceed as follows to change the spacing or interval.

Remove the two hex bolts which secure the guide plate. Move the guide plate as shown in the figure and secure it using the hex bolts. The following interval settings are possible

35—205 mm (1 3/8"—8 1/16")

70—240 mm (2 3/4"—9 7/16")

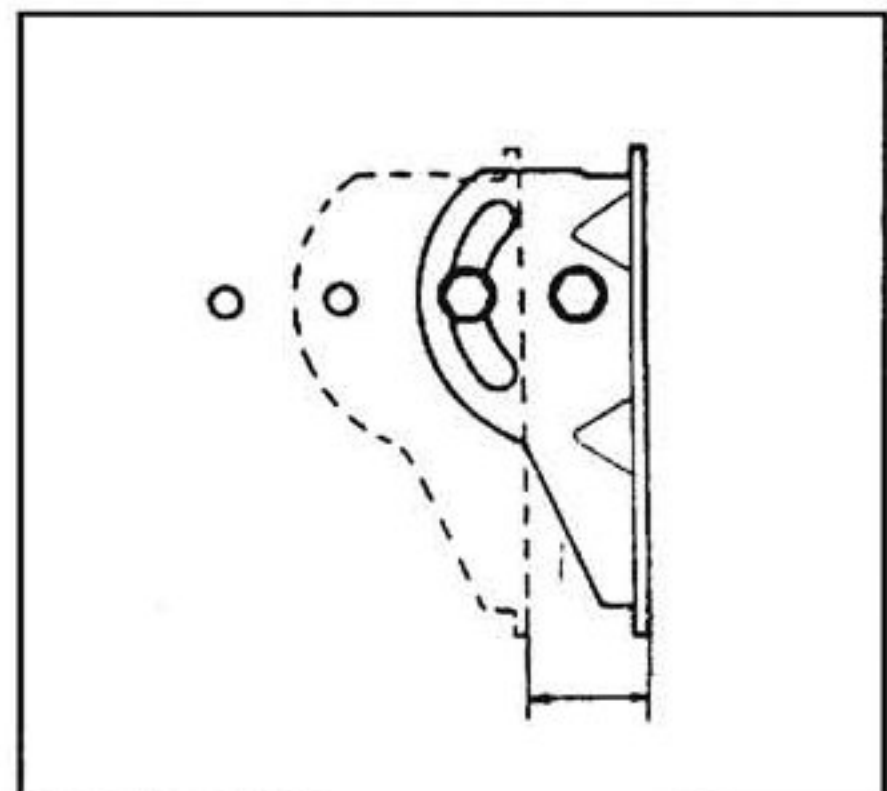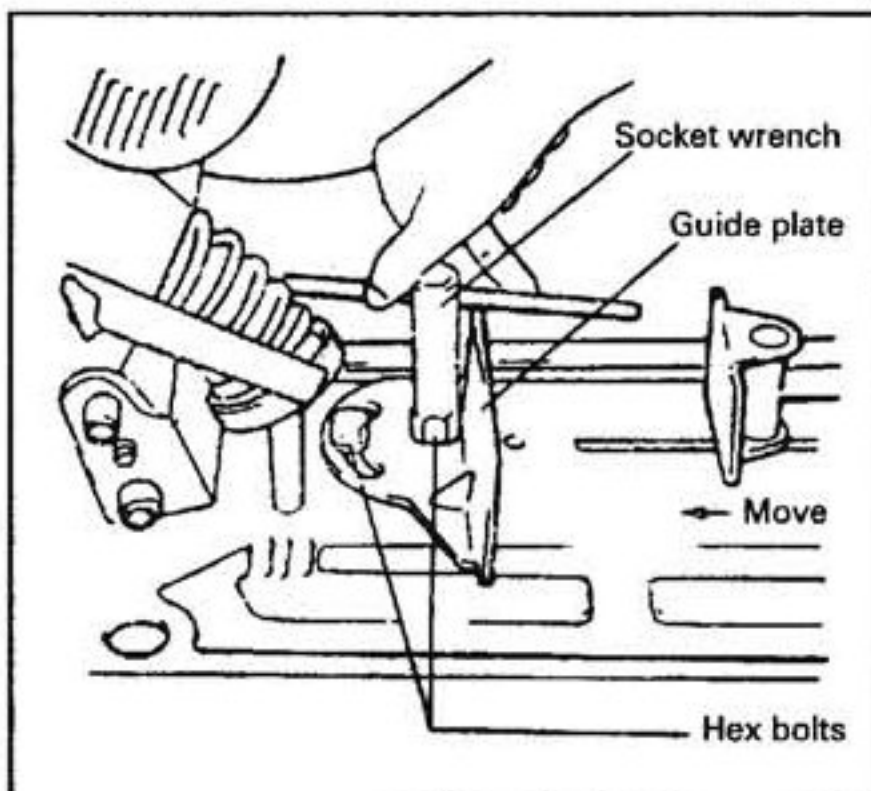


### CAUTION:

Remember that narrow workpieces may not be secured safely when using the two, wider interval settings.

### Setting for desired cutting angle

To change the cutting angle, loosen the tow hex bolts which secure the guide plate. Move the guide plate to the desired angle ( $0^{\circ}$  -  $45^{\circ}$ ) and tighten the hex bolts securely.

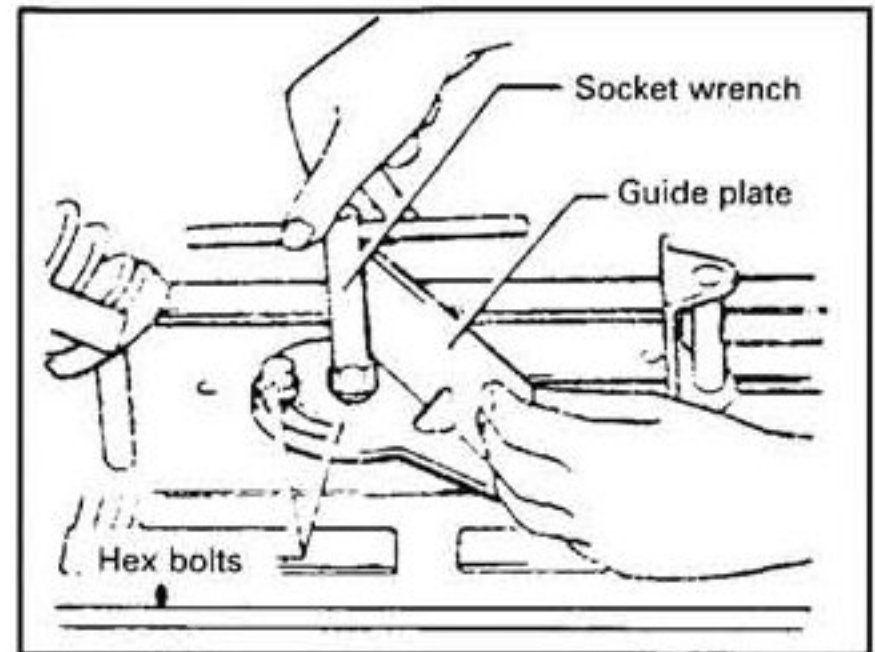


### CAUTION

Never perform miter cuts when the guide plate is set at the 35-205mm ( $1 \cdot 3/8"$  -  $8 \cdot 1/16"$ ) or 70-240 mm ( $2 \cdot 3/4"$  -  $9 \cdot 7/16"$ ) position

### Securing workpieces


By turning the vise handle counterclockwise and then flipping the vise nut to the left, the vise is released from the shaft threads and can be moved rapidly in and out. To grip workpieces, push the vise handle until the vise plate contacts the workpiece. Flip the vise nut to the right and then turn the vise handle clockwise to securely retain the workpiece.

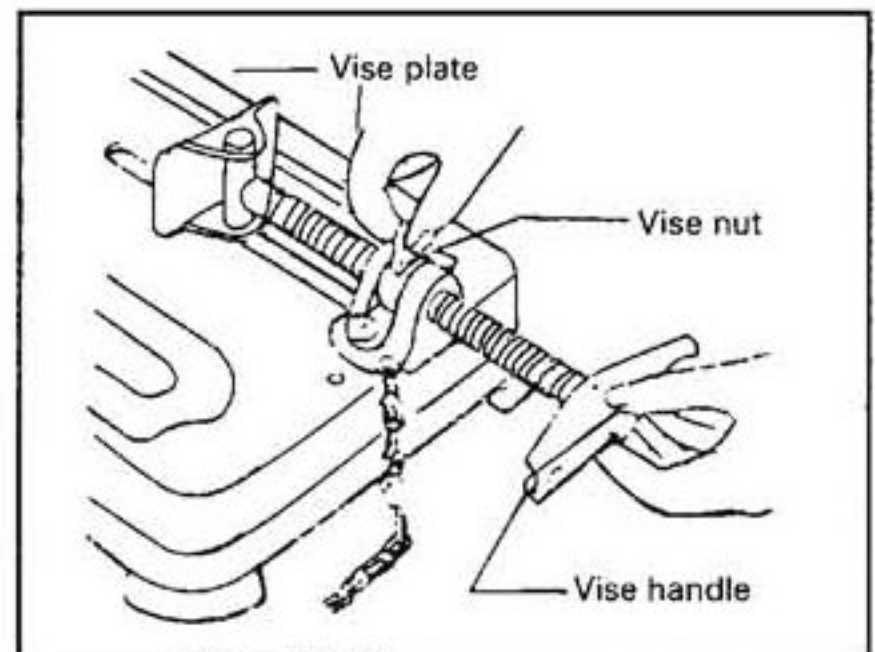

### CAUTION


Always set the vise nut to the right fully when securing the workpiece. Failure to do so may result in insufficient securing of the workpiece. This could cause the workpiece to be ejected or cause a dangerous breakage of the wheel.

When the cut-off wheel has worn down considerably, use a spacer block of sturdy, non-flammable material behind the workpiece as shown in the figure. You can more efficiently utilize the worn wheel by using the mid point on the periphery of the wheel to cut the workpiece.

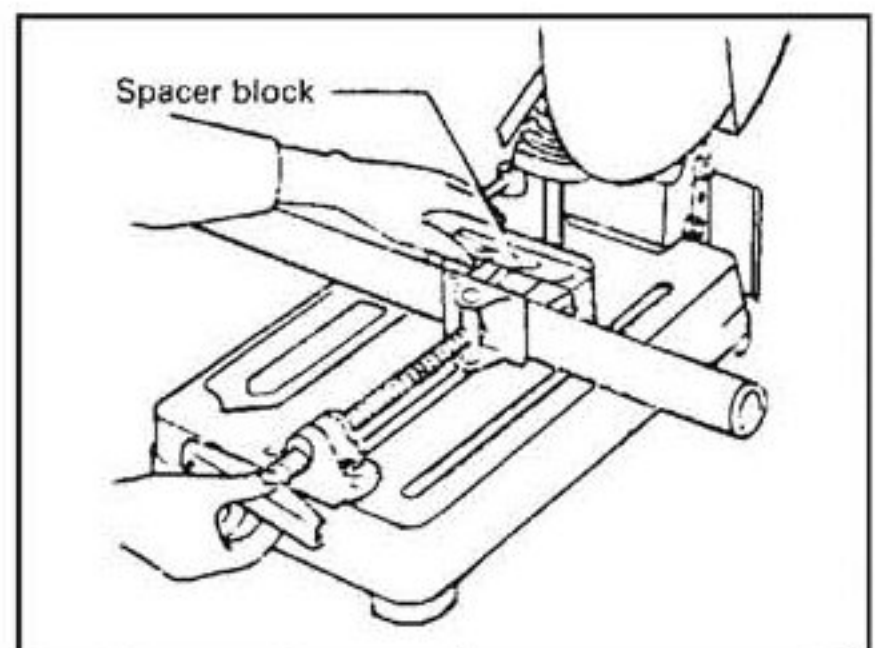




If you use a spacer block which is slightly narrower than the workpiece as shown in the figure, you can also utilize the wheel economically.

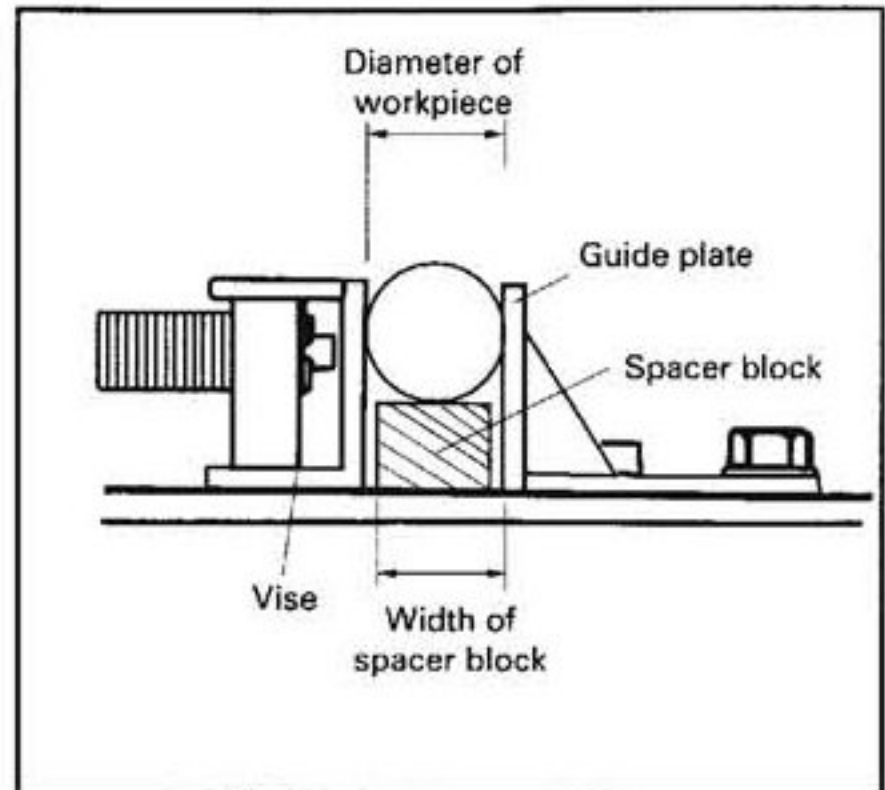


Long workpieces must be supported by blocks of non-flammable material on either side so that it will be level with the base top.

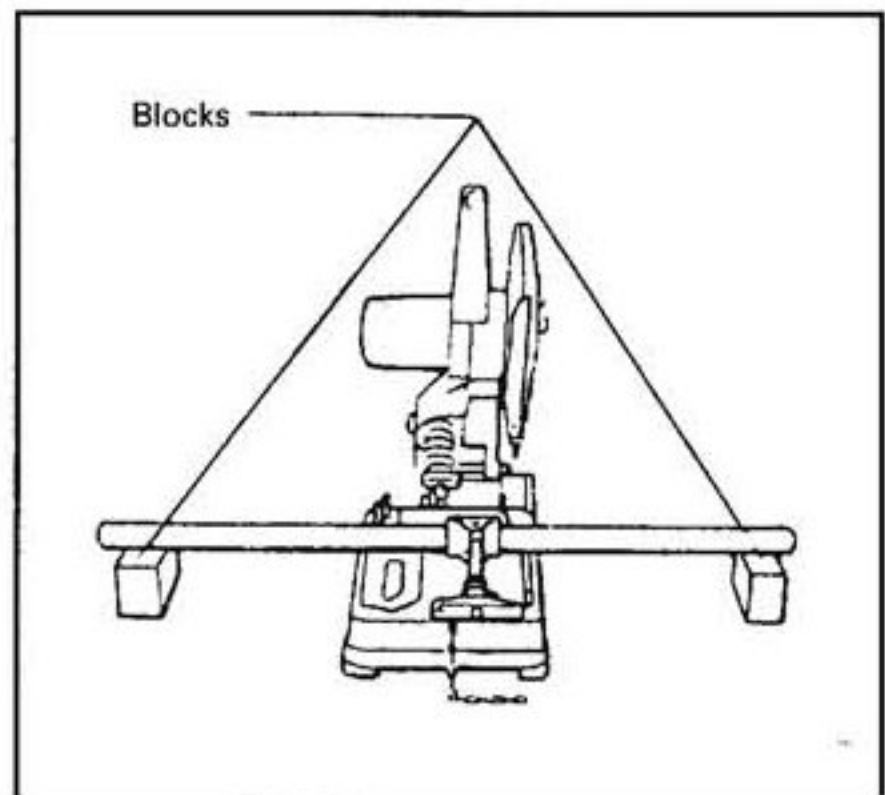

### Switch action

To start the saw hold down the safety button and then pull the trigger. The saw will not start unless the safety button is pressed.

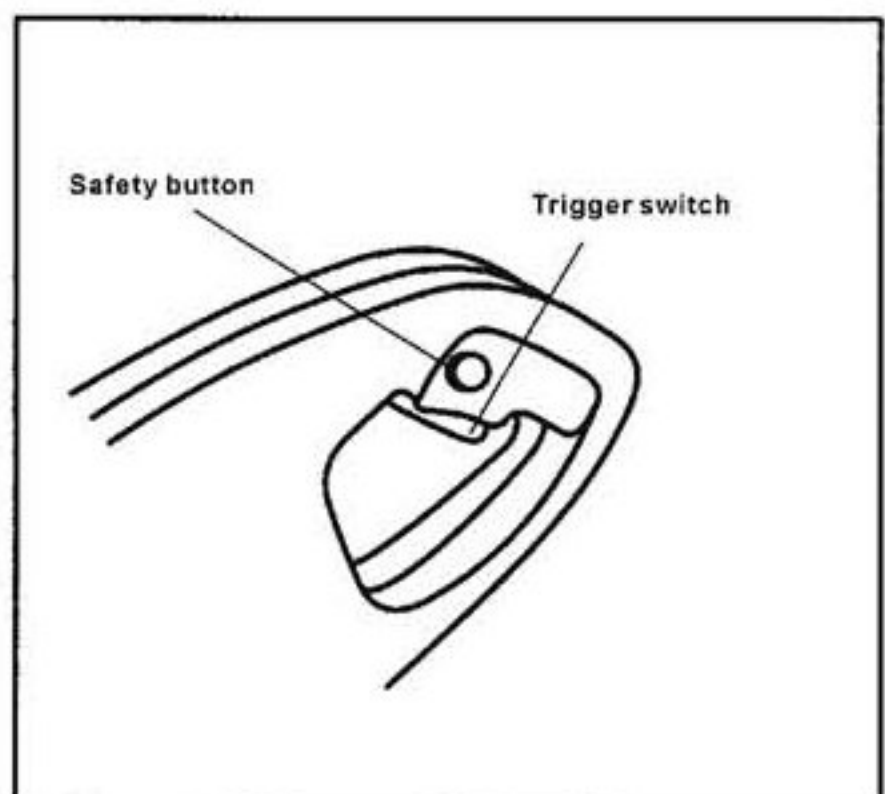

### CAUTION

Before plugging in the tool, always check to see that the trigger switch actuates properly and returns to the "OFF" position when released.

### Operation





Hold the handle firmly. Switch on the tool and wait until the wheel attains full speed before lowering gently into the cut. When the wheel contacts the workpiece, gradually bear down on the handle to perform the cut. When the cut is completed, switch off the tool and **WAIT UNTIL THE WHEEL HAS COME TO A COMPLETE STOP** before returning the handle to the fully elevated position.

### CAUTION

Proper handle pressure during cutting and maximum cutting efficiency can be determined by the amount of sparks that is produced while cutting. Your pressure in the handle should be adjusted to produce the maximum amount of sparks. Do not force the cut by applying excessive pressure on the handle. Reduced cutting efficiency, premature wheel wear as well as possible damage to the tool cut-off wheel or workpiece may result.

### Cutting capacity

Max cutting capacity varies depending upon the cutting angle and workpiece shape.

Cutting angle	Workpiece shape			
			A x B 	
90°	115 mm (4 · 1/2")	120 mm (4 · 23/32")	155 mm x 142 mm (4 · 1/2" x 5 · 5/8") 102 mm x 197 mm (4" x 7 · 3/4") 70 mm x 240 mm (2 · 3/4" x 9 · 7/16")	139 mm (5 · 1/2")
45°	115 mm (4 · 1/2")	106 mm (4 · 3/16")	115 mm x 102 mm (4 · 1/2" x 4")	100 mm (3 · 15/16")

### Tool head slide system



The tool head slides back toward you approx. 17mm(21/32") when you pull the handle. This system is convenient for the following applications.

1 When cutting thick pipes or bars.

Move the handle back and forth to slide the tool head. This will help increase cutting efficiency and prevent wheel loading.


2 When cutting channels or angles

If a portion of the workpiece near you is left uncut, pull the handle. The tool head slides back and the wheel cuts the remaining uncut portion. If the uncut portion cannot be cut even by using this method, use a spacer block as explained above.

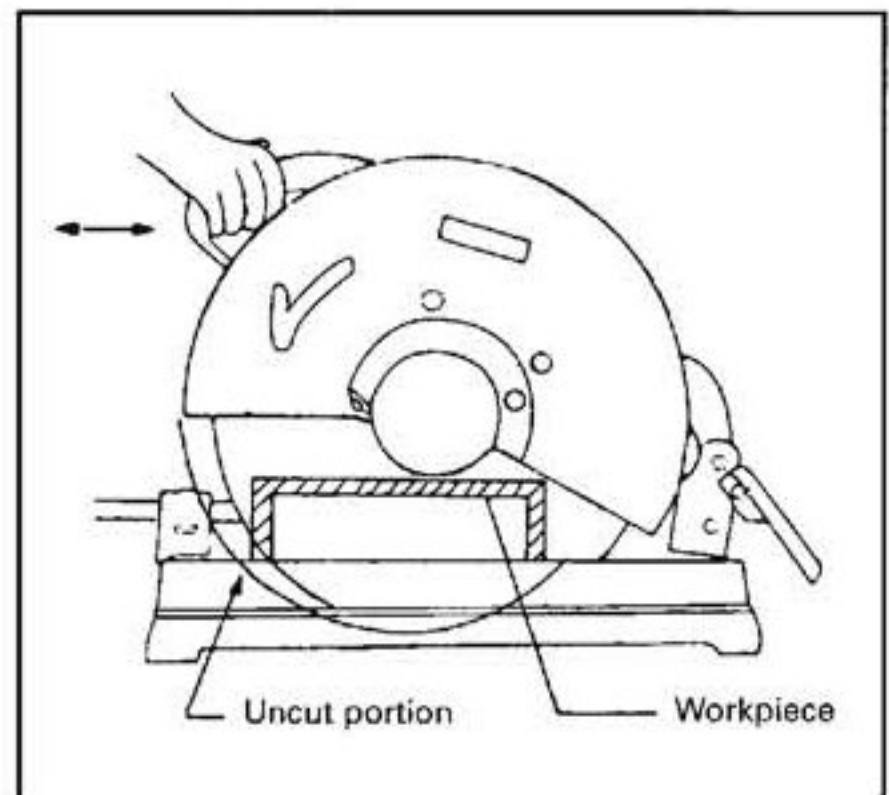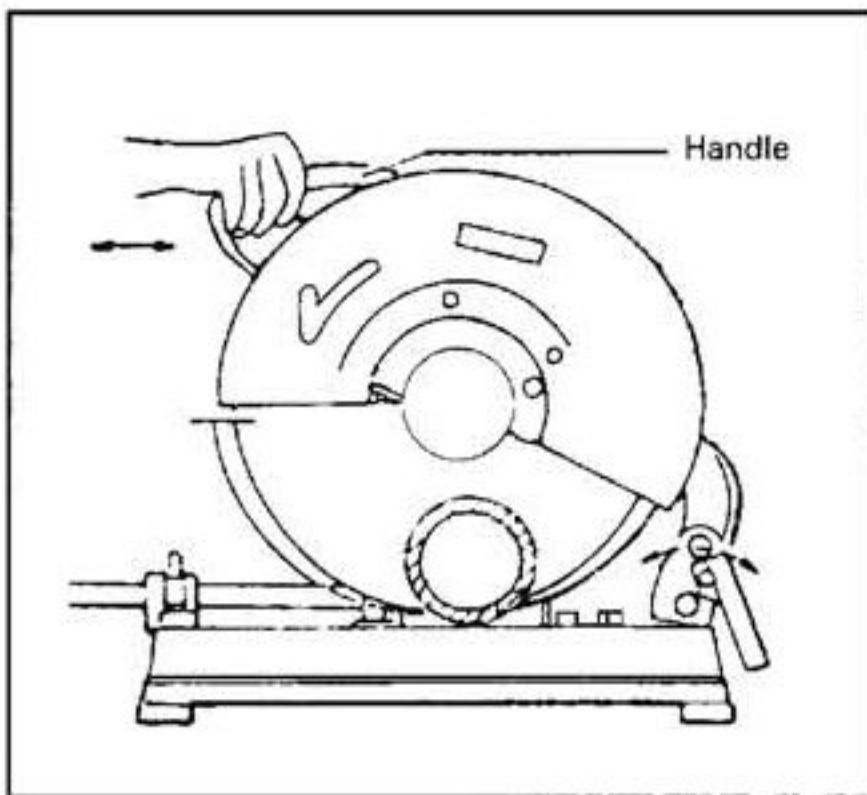

### Carrying the tool

Fold down the tool head to the position where you can attach the chain to the hook on the handle.

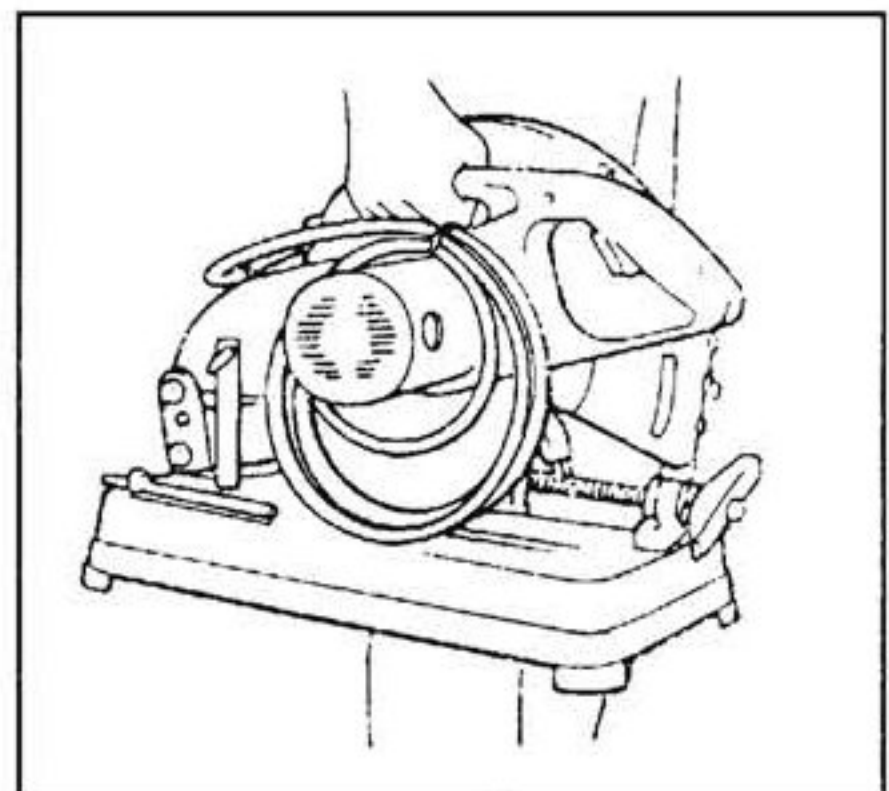




# ACCESSORIES

Socket wrench 17



## ATD-10514

### 1 of 2

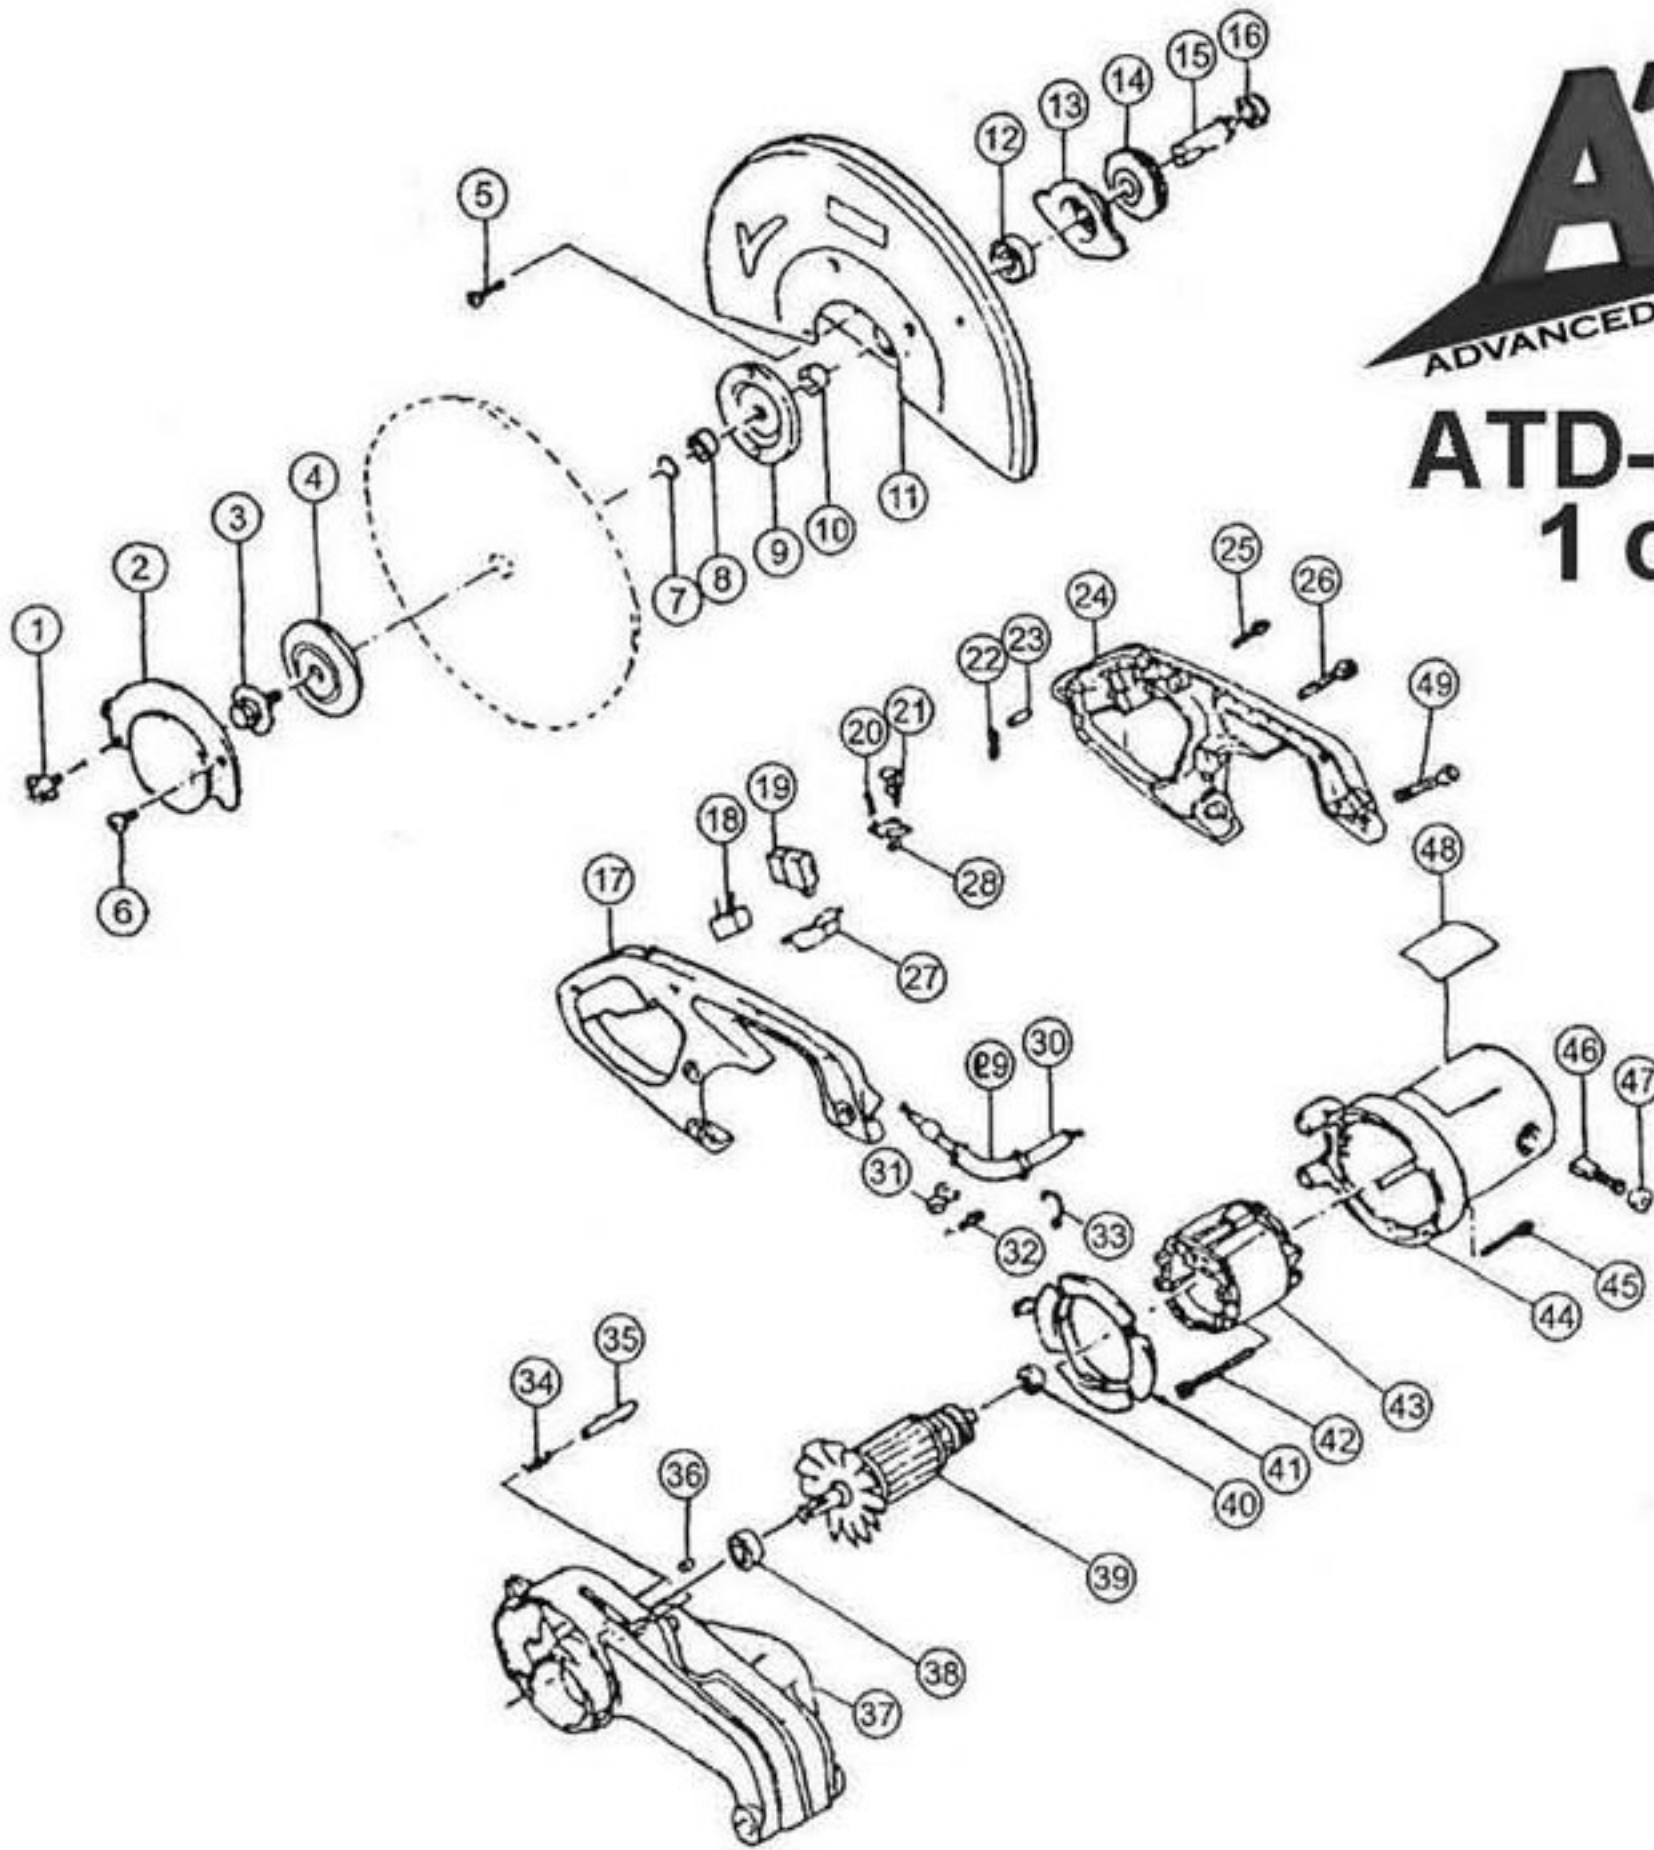


ITEM#	ORDERING PART#	PART DESCRIPTION
1	PRT10514-1	SCREW M6x10
2	PRT10514-2	CENTER CAP
3	PRT10514-3	HEX BOLT M10x25
4	PRT10514-4	OUTER FLANGE 90
5	PRT10514-5	PAN HEAD SCREW M6x20 W/WASHER
6	PRT10514-6	FLAT HEAD SCREW M6
7	PRT10514-7	O-RING 14
8	PRT10514-8	RING 17
9	PRT10514-9	INNER FLANGE 90
10	PRT10514-8	RING 17
11	PRT10514-11	SAFETY COVER
12	PRT10514-12	BALL BEARING 60203
13	PRT10514-13	BEARING BOX
14	PRT10514-14	HELICAL GEAR
15	PRT10514-15	SPINDLE
16	PRT10514-16	BALL BEARING 60100
17	PRT10514-24	HANDLE SET (W/ITEM# 24)
18	PRT10514-18	NOISE SUPPRESSOR
19	PRT10514-19	SWITCH Includes #20, 21, 27 & 28
20	PRT10514-20	USE PRT10514-19
21	PRT10514-21	USE PRT10514-19
22	PRT10514-22	HANGER
23	PRT10514-23	PIN 6
24	PRT10514-24	HANDLE SET (W/ITEM# 17)
25	PRT10514-25	TAPPING SCREW 4x18

ITEM#	ORDERING PART#	PART DESCRIPTION
26	PRT10514-26	PAN HEAD SCREW M5x50 W/WASHER
27	PRT10514-27	USE PRT10514-19
28	PRT10514-28	USE PRT10514-19
29	PRT10514-29	CORD GUARD
30	PRT10514-30	CORD
31	PRT10514-31	STRAIN RELIEF
32	PRT10514-25	TAPPING SCREW 4x18
33	PRT10514-33	HOOK
34	PRT10514-34	COMPRESSION SPRING 7
35	PRT10514-35	STOPPER
36	PRT10514-36	RUBBER PIN 6
37	PRT10514-37	GEAR HOUSING
38	PRT10514-38	BALL BEARING 60202
39	PRT10514-39	ARMATURE ASSY
40	PRT10514-40	BALL BEARING 60029
41	PRT10514-41	BAFFLE PLATE
42	PRT10514-42	PAN HEAD SCREW M5x80 W/WASHER
43	PRT10514-43	FIELD
44	PRT10514-44	MOTOR HOUSING
45	PRT10514-26	PAN HEAD SCREW M5x50 W/WASHER
46	PRT10514-46	CARBON BRUSH
47	PRT10514-47	BRUSH HOLDER CAP
48	PRT10514-48	NAME PLATE
49	PRT10514-49	PAN HEAD SCREW M5x35



# ATD-10514

## 2 of 2

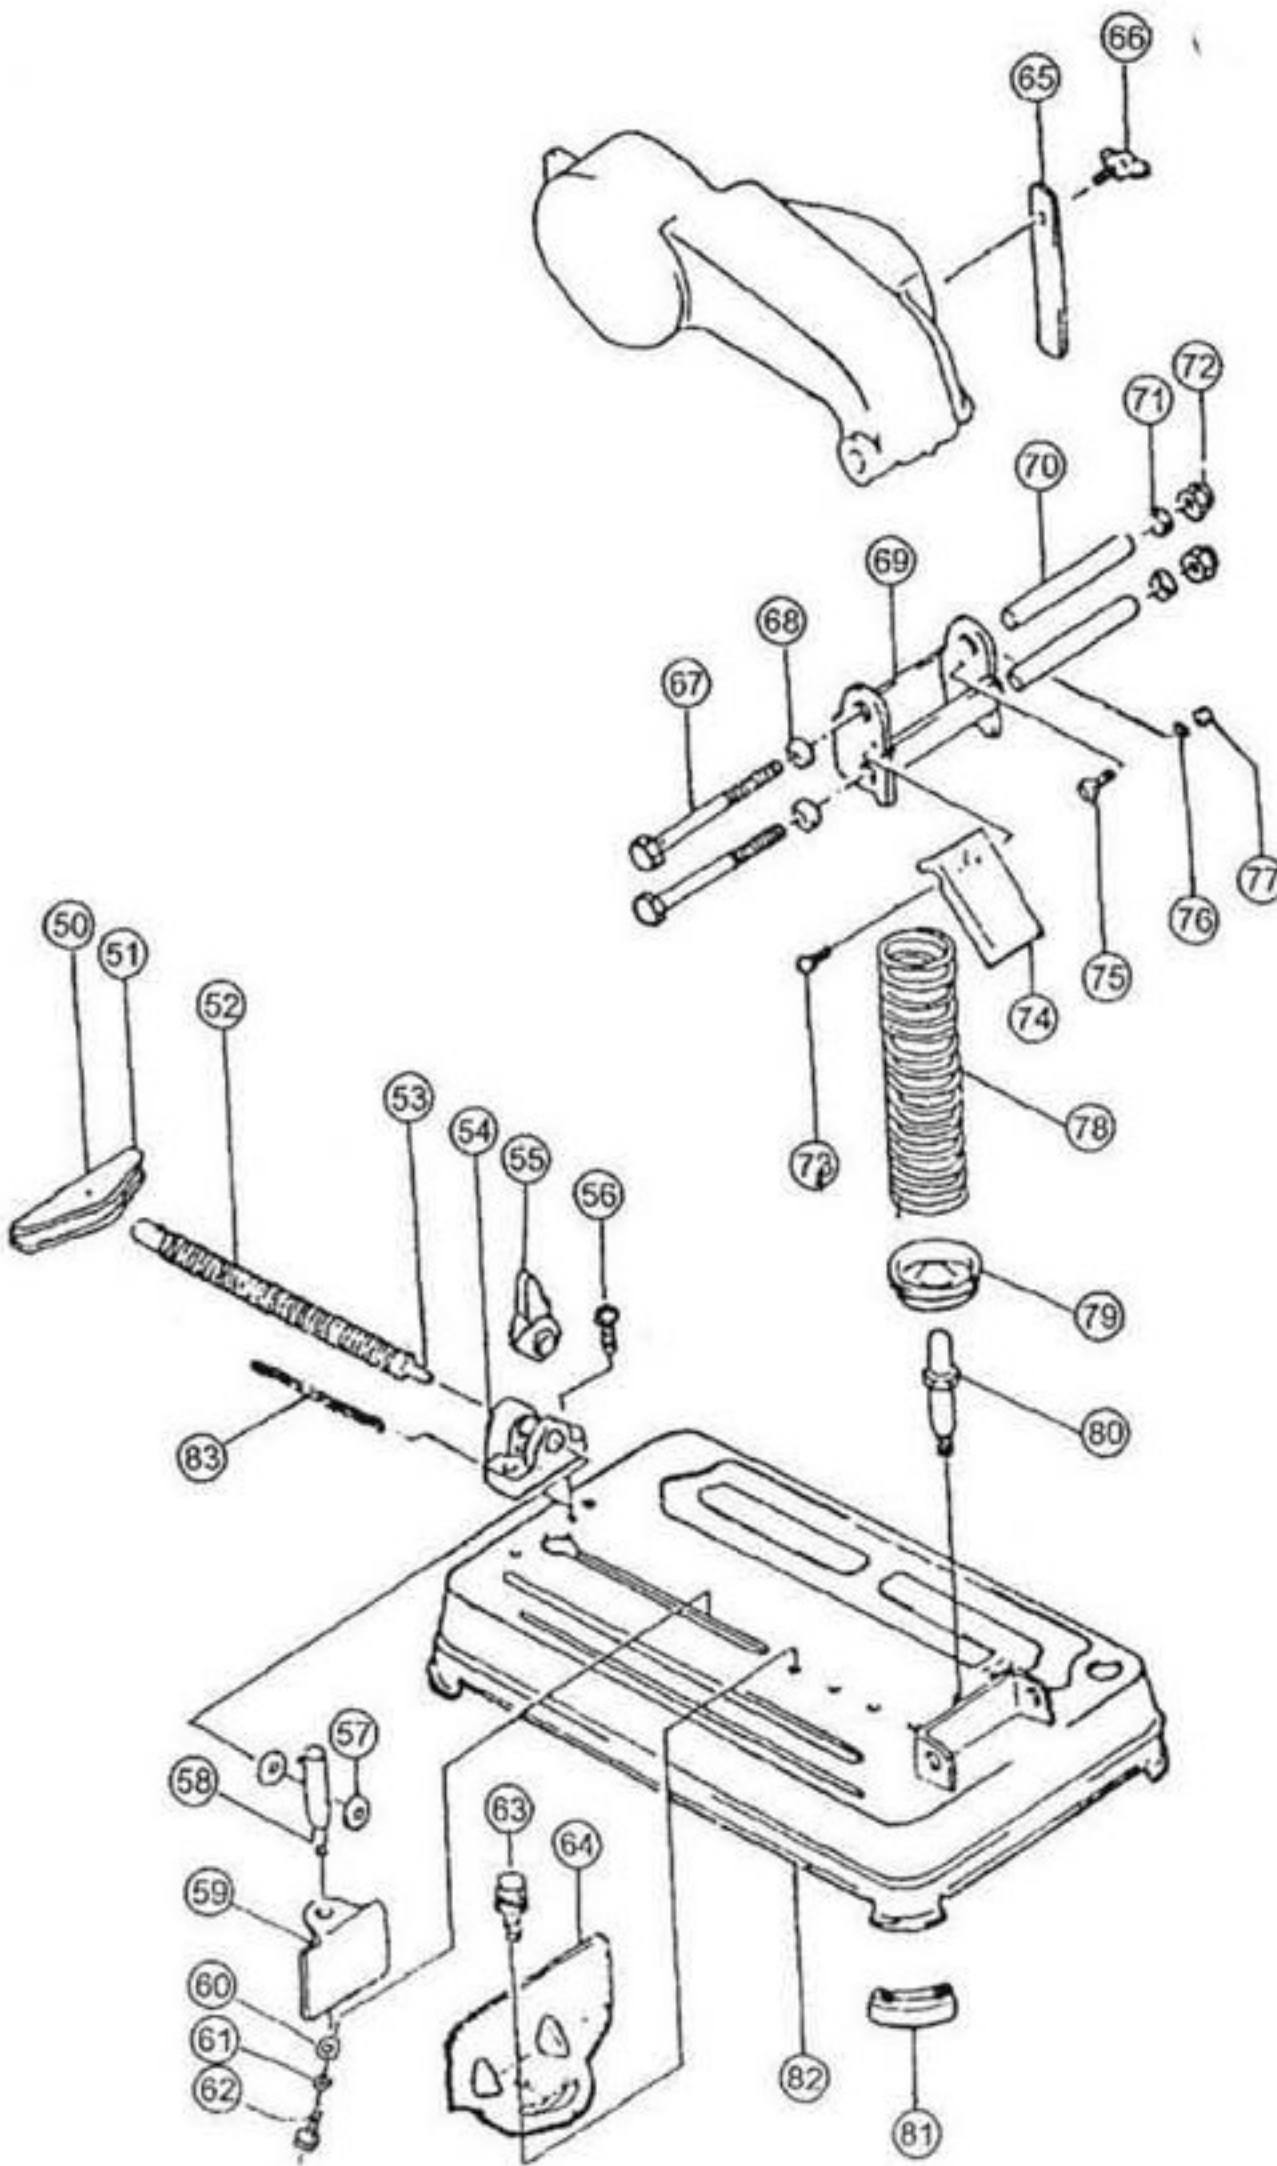

ORDERING PART#	ITEM#	PART DESCRIPTION	ORDERING PART#	ITEM#	PART DESCRIPTION
PRT10514-50	50	SPRING PIN 5-20	PRT10514-67	67	HEX BOLT M10x130
PRT10514-51	51	HANDLE 120	PRT10514-68	68	CUP WASHER 10
PRT10514-52	52	VICE SCREW	PRT10514-69	69	ARM
PRT10514-53	53	SPRING PIN 8-18	PRT10514-70	70	PIPE 16-113
PRT10514-54	54	SCREW GUIDE	PRT10514-71	71	CUP WASHER 10
PRT10514-55	55	VICE NUT	PRT10514-72	72	HEX LOCK NUT M10-17
PRT10514-56	56	PAN HEAD SCREW M8x30 W/WASHER	PRT10514-73	73	PAN HEAD SCREW M6x10 W/WASHER
PRT10514-57	57	FLAT WASHER 8	PRT10514-74	74	SPARK GUARD
PRT10514-58	58	SCREW M8	PRT10514-75	75	HEX SOCKET HEAD BOLT M6x12
PRT10514-59	59	VICE PLATE	PRT10514-76	76	SPRING WASHER 6
PRT10514-60	60	FLAT WASHER 8	PRT10514-77	77	HEX NUT M6
PRT10514-61	61	SPRING WASHER 8	PRT10514-78	78	COMPRESSION SPRING 45
PRT10514-62	62	HEX NUT M8	PRT10514-79	79	SPRING HOLDER
PRT10514-63	63	HEX BOLT M10x25	PRT10514-80	80	HEX BOLT M10
PRT10514-64	64	GUIDE PLATE	PRT10514-81	81	CUSHION
PRT10514-65	65	STOPPER PLATE	PRT10514-82	82	BASE
PRT10514-66	66	SCREW M6x10	PRT10514-83	83	CHAIN