

ATD-80444 2,000 LUMEN LED RECHARGEABLE UNDERHOOD LIGHT Owner's Manual



Features:

- 2,000 constant lumen LEDs deliver wider and brighter lighting areas
- (3) brightness settings: High-2000 lumens / Medium-1000 lumens / Low-500 lumens
- Memory function records setting after 5 seconds, and that setting is recalled the next time device is activated
- 360 degree rotating aluminum bar extends 46" to 77.5" for universal attachment
- Battery indicator LEDs shows battery level and charging progress
- Automatic shut-off and overcharge protection for optimal battery life
- Low battery warning indicates charging will be required soon
- Includes (2) removable 5000mAh lithium-ion rechargeable batteries for extended runtimes
- Includes USB-C charging cord and 5V AC wall adapter

Specifications:

- Lumens: 500 low/1,000 medium/2,000 high
- Runtimes: 4 hours low/2 hours medium/1 hour high
- (2) 3.65V, 5000mAh, 18.25Wh lithium-ion rechargeable batteries

Assembly/Operating Instructions

- · Secure the hood hooks to the ends of your SABER Underhood Light with the screws and wrench provided, as shown in figure 1.
- Fully charge your batteries before using this light. To charge, plug the unit into any 110-120V AC power source or 5V DC USB port. Let the unit fully charge until the 3 LED's light up solid on the charging indicator before use. The ATD-80445 21700 / 3.65V / 5000 mAh battery can also be charged by plugging the USB-C cord directly into the battery. The tip of the battery will light up red while charging and green when fully charged as shown in figure 2.
- · Place one battery in the handle of the light as shown in figure 3. Be sure to secure the spring loaded battery cover with the thumb latch.
- · Press the switch once for low power, twice for medium power three times for high power and four times to turn off.
- · Memory function Setting is recorded after 5 seconds of activation and is recalled the next time device is activated.
- · Low battery warning indicator light will flash three times to indicate that the unit needs charging soon.
- · Charge the battery after each use if it is used often to ensure longevity. Charge the battery every month if it is not in constant use.

Cautions

- DO NOT USE in or around tubs, showers, sinks, pools, hot tubs, or in any wet environment.
- · Use only the recommended voltage and frequency requirements.
- Keep out of reach of children.
- Do not operate light with wet hands.
- Keep lamp away from hot objects.



Figure 1






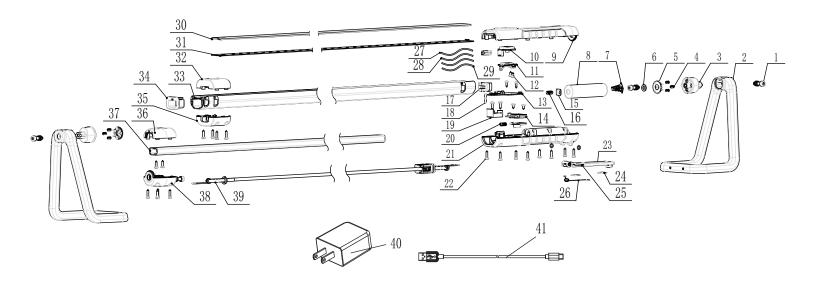


Figure 3



REPLACEMENT PARTS

Not all components of this product are replacement items, but are illustrated as a convenient reference for position in the assembly sequence. When ordering parts, give model number, part number and description. Call your distributor for current pricing:



ITEM#	ORDERING PART#	PART DESCRIPTION
1	PRT80444-01	SCREW
2	PRT80444-02	PJ1040 HOLDER
3	PRT80444-03	HOLDER CLAMPS
4	PRT80444-04	SWITCH SPRING
5	PRT80444-05	TURRET
6	PRT80444-06	SHIM
7	PRT80444-07	SPRING PLATE PARTS
8	ATD80445	BATTERY
9	PRT80444-09	FRONT HANDLE COVER
10	PRT80444-10	SWITCH CAP
11	PRT80444-11	SWITCH CAP PLATE
12	PRT80444-12	SCREW
13	PRT80444-13	PCBA
14	PRT80444-14	PUSH PRESSING PLATE
15	PRT80444-15	BATTERY POSITIVE PLATE
16	PRT80444-16	SPRING
17	PRT80444-17	LARGE PIPE SEALING RING
18	PRT80444-18	BUNGEE PIN
19	PRT80444-19	ALUMINIUM TUBE PLATE
20	PRT80444-20	SPRING
21	PRT80444-21	BACK HANDLE COVER

ITEM#	ORDERING PART#	PART DESCRIPTION
22	PRT80444-22	SCREW
23	PRT80444-23	BATTERY COVER PLATE
24	PRT80444-24	SILICONE BATTERY PAD
25	PRT80444-25	BATTERY COVER FIXING PIN
26	PRT80444-26	BATTERY COVER TORSION SPRING
27	PRT80444-27	WIRE
28	PRT80444-28	WIRE
29	PRT80444-29	WIRE
30	PRT80444-30	LENS
31	PRT80444-31	PCBA
32	PRT80444-32	ALUMINUM TUBE FIXED FRONT COVER
33	PRT80444-33	LARGE ALUMINIUM TUBE
34	PRT80444-34	LARGE PIPE HOLDER
35	PRT80444-35	ALUMINUM TUBE FIXED BACK COVER
36	PRT80444-36	SMALL HANDLE FRONT COVER
37	PRT80444-37	SMALL ALUMINUM TUBE
38	PRT80444-38	SMALL HANDLE BACK COVER
39	PRT80444-39	ELASTIC ROPE
40	PRT80444-40	AC CHARGER, 100-240V AC 5V2A DC
41	PRT80444-41	USB TYPE-C CHARGING CABLE



PURCHASED FROM:

THIS WARRANTY AND CONFIRMED RECEIPT(S) SHOULD BE RETAINED BY THE CUSTOMER AT ALL TIMES