




ATD-5080 Plastic Lever Action Barrel Pump Owner's Manual



Features:

- Lever action barrel pump, designed for use with DEF, high viscosity oils, agricultural chemicals etc.. Pump design makes it extremely convenient and comfortable to pump thick oils without excessive fatigue
- Built-in 2" bung adapter allows the pump to be fixed on drums with 2" opening. Pump position can be adjusted using the lock nut incorporated in the pump body
- Pump outlet is fitted with an air vent cap which when loosened breaks the siphon action
- Comes complete with suction tube for use with 15-55 gal. drums and a 6.5' x 3/4" flexible corrugated discharge hose

ATD-5080
PLASTIC LEVER PUMP
INSTRUCTIONS FOR USE

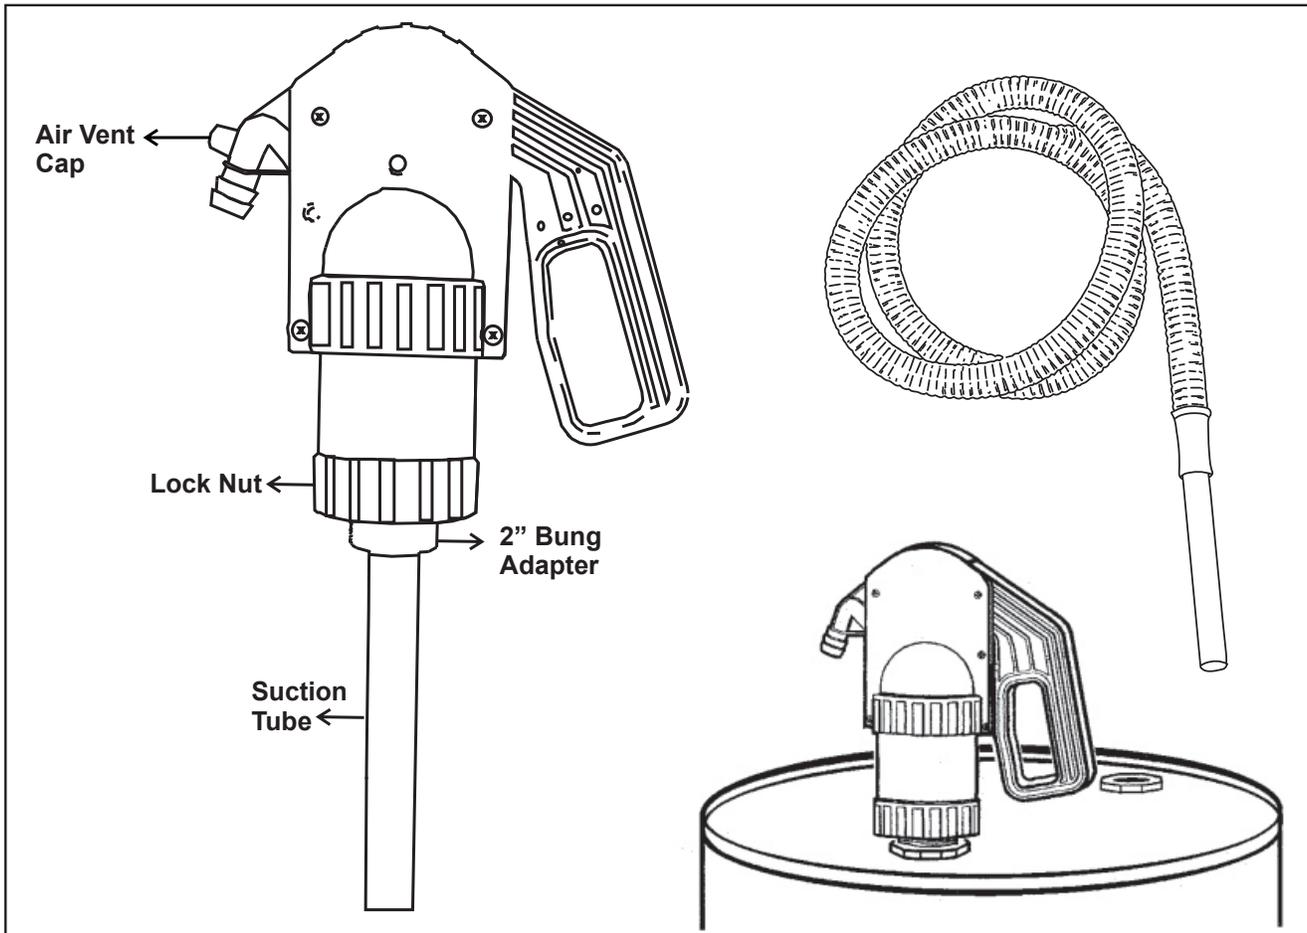

Piece Count

1. Pump Assembly
2. Plastic Suction Tube (in 2 parts)
3. Corrugated Discharge Hose, Part number - PRT5080-30
4. Hose Clip

Features

1. Lever Action Barrel pump, designed specifically for use with high viscosity oils. Pump design makes it extremely convenient & comfortable to pump thick oils without excessive fatigue
2. Choice of materials used in the pump construction, make it versatile for use with water based media, as well as select chemicals
3. Built-In 2" Bung Adapter allows the pump to be fixed on Drums with 2" Opening. Pump position can be adjusted using the Lock Nut incorporated in the pump body
4. Pump outlet is fitted with an Air Vent Cap which when loosened breaks the Siphon action
5. Supplied complete with telescopic suction tube for use with 15- 55 gal (50-205 Liter) drums & 2m x 3/4" Flexible Corrugated discharge hose
6. Delivers 1 Pint (500 ml) per stroke
7. Operating Temperature: -5 to +45 degree Centigrade

Wetted Component

Polyacetal, Polypropylene, Polyethylene, PVC & Viton

Recommended Use

Water-based media, detergents, soaps, antifreeze, windshield washer, Lubricants, Agricultural Chemicals, Insecticides, Fungicides, Fertilizers & Herbicides, Adblue, Urea, DEF etc.. Pump should only be used with non Inflammable liquids

Do not use with

Any media not compatible with materials used in the pump construction.
These pumps must never be used for Fuel Transfer or with Thinners, Solvents etc.

Assembly & Pump Operation

1. Pump comes with a 2 part Suction tube. One tube is telescopic in nature & should be used when using the pump on smaller 5-16 gal. (15-50 liter) drums. When using the pump with 55 gal. (205 liter) drums assemble the other suction tube also with the telescopic suction tube & extend it fully. Tighten the connections gently so as not to shear the threads
2. Now screw the Suction tube to the $\frac{3}{4}$ " female threaded opening at the pump inlet.
3. Insert the complete pump assembly (Pump & Suction tube together) into the drum from the 2" threaded opening on the drum
4. Tighten the 2" Bung Threads on the pump onto the threaded opening on the drum
5. Pump has a Built-in Lock Nut which can be turned & used to position the pump outlet on the drum
6. Connect the Corrugated discharge hose using the Hose Clip onto the Pump Outlet
7. Loosen the Air Vent Cap on the Pump outlet if you wish to manually operate the pump. If Siphon action is desired , tighten the cap fully
8. Start operating the pump handle , making sure that the corrugated discharge tube has it's end in the receiving container
9. Within a few strokes , pump will start dispensing media
10. If Air Vent cap is in the fully closed position, pump will keep dispensing even without operating the pump handle until the media level in the supply container becomes equal to the media level in the receiving container. Siphon action can at any time be stopped by opening the air vent cap
11. For best results , pump should be used for pumping only 1 type of media



THIS WARRANTY AND CONFIRMED RECEIPT(S) SHOULD BE RETAINED BY THE CUSTOMER AT ALL TIMES

PURCHASED FROM: _____

DATE PURCHASED: _____

INVOICE/RECEIPT NUMBER: _____

Your ATD-5080 is warranted for a period of 12 months from the original purchase date.

For a period of one (1) year from your purchase date, ATD Tools Inc. will repair or replace (at its option) without charge, your ATD product if it was purchased new and the product has failed due to a defect in material or workmanship which you experienced during normal use of the product. This limited warranty is your exclusive remedy.

To access the benefits of this warranty, contact your supplier, or point of sale directly. You may be advised to return the product under warranty, freight prepaid, to your supplier for warranty determination.

If this ATD product is altered, abused, misused, modified, or undergoes service by an unauthorized technician, your warranty will be void. We are not responsible for damage to ornamental designs you place on this ATD product and such ornamentation should not cover any warnings or instructions or they may void the warranty. This warranty does not cover scratches, superficial dents, and other abrasions to the paint finish that occur under normal use. It also does not cover normal wear items such as but not limited to brushes, batteries, drill bits, drill chucks, pads or blades.

Subject to the law in your state:

- (1) Your sole and exclusive remedy is repair or replacement of the defective product as described above.
- (2) ATD is not liable for any incidental damages, including but not limited to, lost profits and unforeseeable consequences.
- (3) The repair and replacement of this product under the express limited warranty described above is your exclusive remedy and is provided in lieu of all other warranties, express or implied. All other warranties, including implied warranties and warranties of merchantability or fitness for a particular purpose are disclaimed and, if disclaimer is prohibited, these warranties are limited to one year from your date of purchase of this product.

Some states' laws do not allow limited durations on certain implied warranties and some states' laws do not allow limitations on incidental or consequential damages. You should consult the law in your state to determine how your rights may vary.

[Affix receipt or invoice here for safe keeping]