

Wall Mounted Bumper Stand Owner's Manual



Features:

- Holds up to (4) bumper covers
- Powder coated steel construction

Specifications:

- Overall size: 59" H x 39" W x 20" D
- Max Load Capacity per shelf: 66 lbs.

SAFETY INFORMATION

Assembly Precautions

- 1. Assemble only according to these instructions. Improper assembly can create hazards.
- 2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
- 3. Keep assembly area clean and well lit.
- 4. Keep bystanders out of the area during assembly.
- 5. Do not assemble or use this device when tired or when under the influence of drugs or medication.
- 6. Weight capacity and other product capabilities apply to properly and completely assembled product only.

User Precautions

- 1. This Wall Mounted Bumper Stand is not a toy. Do not allow children to play with or near this Wall Mounted Bumper Stand.
- 2. Use as intended only.
- 3. Inspect before every use; do not use if parts are loose, damaged or missing.
- 4. Do not exceed listed weight capacity, evenly distributed. Be aware of dynamic loading. Sudden load movement may briefly create excess load causing product failure.
- 5. Use only on flat, level, hard surface able to properly support the automotive panels.

ASSEMBLY INSTRUCTIONS

NOTE: Leave ALL nuts and bolts hand tight until everything is together, and aligned. Refer to page 3 of this manual for more detail.

- 1) Attach the Wall Mount Brackets (#8) to the Support Pole (#1) using the Hex Bolts M8 x 20 (#5) and Hex Nut M8 (#6)
- 2) Attach the Support Arms (#2) to the Support Pole (#1) using the Hex Socket Bolt M8 x 20 (#3) and the Washer, M8 (#4) NOTE the Locking Pin (#7) position at the top of the assembly, and fasten it to the Hex Socket Bolt and Washer (#3 & #4)
- 3) Once satisfied with the alignment of your Wall Mounted Bumper Stand, tighten all of the nuts and bolts.
- 4) When mounting to the wall, there are many methods depending on what type of wall you have. The following will cover two of the most common walls. **Due to the varying mounting surfaces and methods, no mounting bolts are supplied.**

For the applications below, first find a suitable place to mount your Wall Mounted Bumper Stand, and mark the mounting holes on the wall, using your assembled Wall Mounted Bumper Stand for a template, ensuring that they will be straight and level.

For concrete or cement walls:

Pick the appropriate sized screws and anchors for your application, keeping in mind the diameter of the holes and the weight your Wall Mounted Bumper Stand will be holding (264 lbs. max). Drill a hole into the concrete or cement wall with a masonry bit and then insert your plastic or metal anchor into the hole. The anchor provides a secure base for your screws or bolts to be inserted. Hold the Wall Mounted Bumper Stand up to the wall, and drive your screws or bolts through the Wall Mount Brackets (#8) into your wall anchors.


For dryall or hollow walls:

The best method is to locate your wall studs, and mount your Wall Mounted Bumper Stand through the drywall and into the studs. If this is not an option, hollow wall anchors are another acceptable method for fastening to the wall. Pick the appropriate sized screws and anchors for your application, keeping in mind the diameter of the holes and the weight your Wall Mounted Bumper Stand will be holding (264 lbs. max). Drill a hole into the drywall or hollow wall with a drill bit and then insert your plastic or metal anchor into the hole. The anchor provides a secure base for your screws or bolts to be inserted. Hold the Wall Mounted Bumper Stand up to the wall, and drive your screws or bolts through the Wall Mount Brackets (#8) into your wall anchors.

Your ATD-6578 Wall Mounted Bumper Stand is now ready for use.

REPLACEMENT PARTS

Not all components of this product are replacement items, but are illustrated as a convenient reference for position in the assembly sequence. When ordering parts, give model number, part number and description. Call your distributor for current pricing:

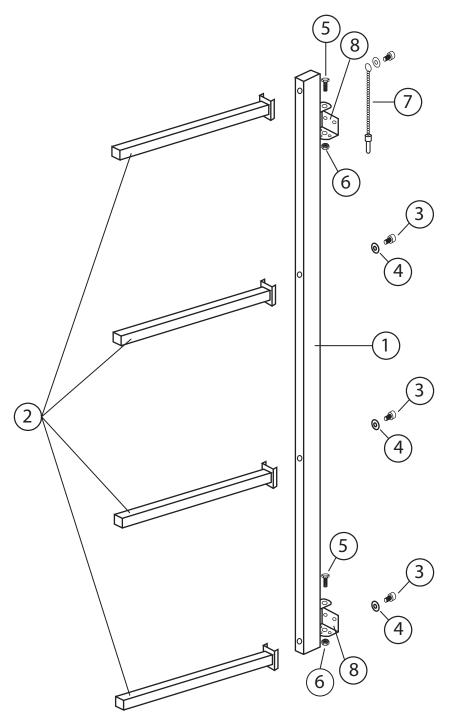

ITEM#	ORDERING PART#	PART DESCRIPTION	QTY
1	PRT6578-01	SUPPORT POLE	2
2	PRT6578-02	SUPPORT ARM	8
3	PRT6578-HK	HEX SOCKET BOLT M8 x 20	8
4	PRT6578-HK	WASHER M8	8
5	PRT6578-HK	HEX BOLT M8 x 20	4
6	PRT6578-HK	NUT, M8	4
7	PRT6578-07	LOCKING PIN	4
8	PRT6578-08	WALL MOUNT BRACKET	4

PRT6578-HK - HARDWARE KIT INCLUDES 3, 4, 5 & 6



PURCHASED FROM:

THIS WARRANTY AND CONFIRMED RECEIPT(S) SHOULD BE RETAINED BY THE CUSTOMER AT ALL TIMES

DATE PURCHASED:
INVOICE/RECEIPT NUMBER:
Your ATD-6578 is warranted for a period of 12 months from the original purchase date.
For a period of one (1) year from your purchase date, ATD Tools, Inc. will repair or replace (at its option) without charge, your ATD product if it was purchased new and the product has failed due to a defect in material or workmanship which you experienced during normal use of the product. This limited warranty is your exclusive remedy.
To access the benefits of this warranty, contact your supplier, or point of sale directly. You may be advised to return the product under warranty, freight prepaid, to your supplier for warranty determination.
If this ATD product is altered, abused, misused, modified, or undergoes service by an unauthorized technician, your warranty will be void. We are not responsible for damage to ornamental designs you place on this ATD product and such ornamentation should not cover any warnings or instructions or they may void the warranty. This warranty does not cover scratches, superficial dents, and other abrasions to the paint finish that occur under normal use. It also does not cover normal wear items such as but not limited to brushes, batteries, drill bits, drill chucks, pads or blades.
Subject to the law in your state: (1) Your sole and exclusive remedy is repair or replacement of the defective product as described above. (2) ATD is not liable for any incidental damages, including but not limited to, lost profits and unforeseeable consequences. (3) The repair and replacement of this product under the express limited warranty described above is your exclusive remedy and is provided in lieu of all other warranties, express or implied. All other warranties, including implied warranties and warranties of merchantability or fitness for a particular purpose are disclaimed and, if disclaimer is prohibited, these warranties are limited to one year from your date of purchase of this product.
Some states' laws do not allow limited durations on certain implied warranties and some states' laws do not allow limitations on incidental or consequential damages. You should consult the law in your state to determine how your rights may vary.
[Affix receipt or invoice here for safe keeping]