




**ATD**

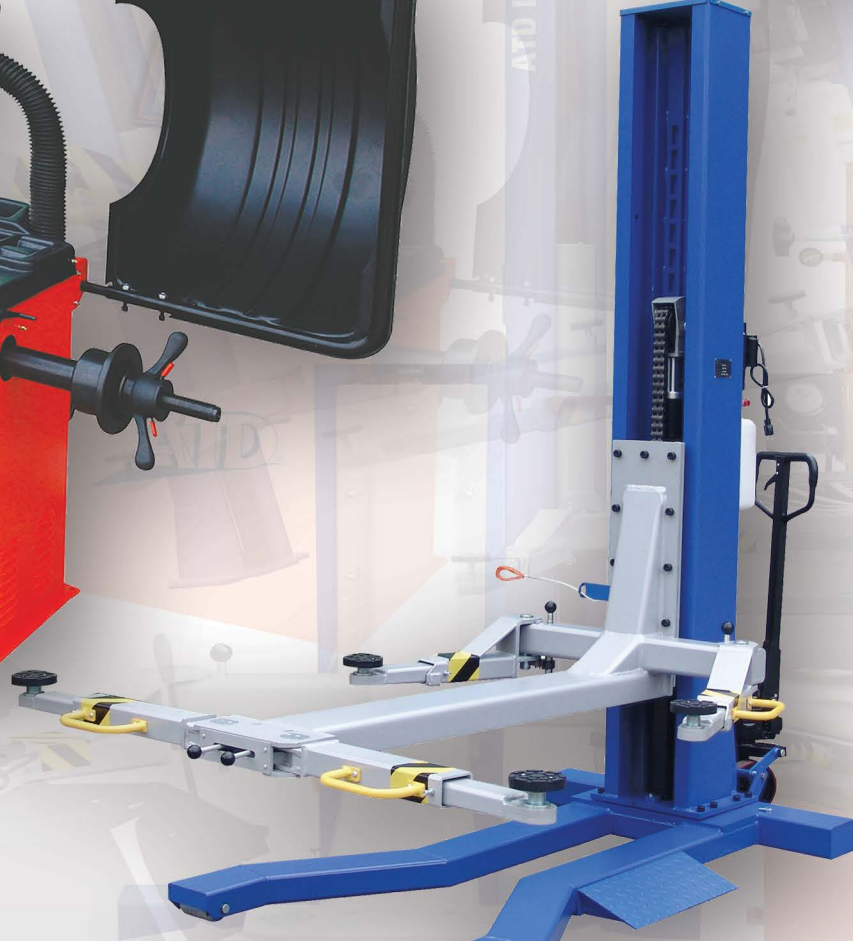

**LIFTS & SHOP EQUIPMENT**

# ATD ALI CERTIFIED TWO POST AUTO LIFTS & ACCESSORIES




ATD2P10BSALI



## ATD2P10BSALI TWO POST CLEAR FLOOR

- **ALI Certified**
- 10,000 lbs. capacity
- Bi-Symmetric arm design
- Rubber door guards
- 3-Stage front arms
- Direct drive pull cylinders
- Single point lock release
- Low profile, spin-up lift pads
- Stackable adapters included
- External hose guards
- **Duro Certified Power Unit - MET, UL, CSA**

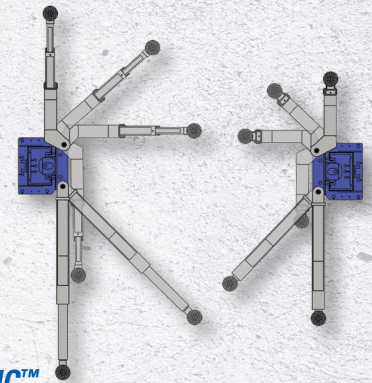

**BI-SYMMETRIC™**  
**ASYMMETRIC OR SYMMETRIC CONFIGURATION**  
• 180° front arm full rotation


ATD2P10BSALI



**SINGLE POINT  
LOCK RELEASE**



**LOW PROFILE PADS WITH  
2.6" AND 5" ADAPTERS**

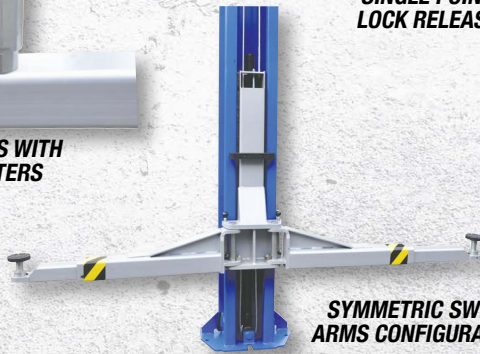

**SYMMETRIC SWING  
ARMS CONFIGURATION**




ATD2P12SALI



## ATD2P12SALI HEAVY-DUTY TWO POST CLEAR FLOOR

- **ALI Certified**
- 12,000 lbs. capacity
- Symmetric arm design
- Rubber door guards
- Direct drive push cylinders
- Single point lock release
- Spin up lift pads - 5" pad height
- Stackable adapters included
- External hose guards
- **Duro Certified Power Unit - MET, UL, CSA**


ATD2P12SALI



**SYMMETRIC**

ATD ALI CERTIFIED 2 POST LIFTS		
Lift Model	ATD2P10BSALI	ATD2P12SALI
Capacity	10,000 lbs.	12,000 lbs.
Height Overall	144"	168-1/2"
Width Overall w/ Power Unit	145-1/2"	151-5/16"
Maximum Lift Height	71"	75"
Width Between Columns	116"	122"
Minimum Pad Height	4"	4-7/8"
Drive Through Clearance	104"	109"
Lifting Speed	50S	50S
Asymmetric / Symmetric	Bi-Symmetric	Symmetric
Clear Floor / Floor Plate	Clear Floor	Clear Floor
Short Arm Reach - min/max	23"-45"	37-5/8"-57"
Long Arm Reach - min/max	41"-59"	Same
Max. Load per Arm	2,500 lbs.	3,000 lbs.
Ship Weight	1,705 lbs.	2,295 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH

# PROFESSIONAL TWO POST AUTO LIFT & ACCESSORIES

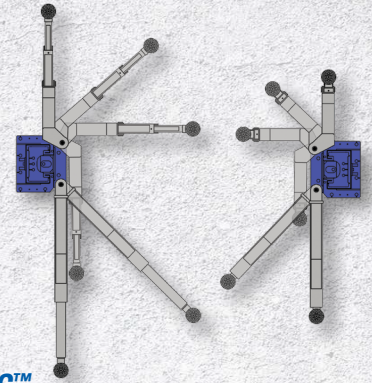


**BI-SYMMETRIC™**  
**ASYMMETRIC OR SYMMETRIC CONFIGURATION**  
 • 180° front arm full rotation

## ATD2P11BS TWO POST CLEAR FLOOR

- 11,000 lbs. capacity
- Bi-Symmetric arm design
- Rubber door guards
- 3-Stage front arms
- Direct drive pull cylinders
- Single point lock release
- Low profile spin up lift pads
- Stackable adapters included
- External hose guards

## ATD2P11CA SPIN-UP CRADLE ADAPTERS

- Spin-up cradle adapters (set of 4)
- Excellent for lifting from vehicle frame
- Can also use with ATD2P11BS



PROFESSIONAL 2 POST LIFT	
Lift Model	ATD2P11BS
Capacity	11,000 lbs.
Height Overall	144"
Width Overall w/ Power Unit	145-1/2"
Maximum Lift Height	71"
Width Between Columns	116"
Minimum Pad Height	4"
Drive Through Clearance	104"
Lifting Speed	50S
Asymmetric / Symmetric	Asymmetric/Symmetric
Clear Floor / Floor Plate	Clear Floor
Short Arm Reach - min/max	23"-45"
Long Arm Reach - min/max	41"-57"
Max. Load per Arm	2,750 lbs.
Ship Weight	1,705 lbs.
Power	220V, 20A, 1PH

## TP12SDX-SPNCA SPIN-UP CRADLE ADAPTERS

- **ALL Certified accessory**
- Spin-up cradle adapters (set of 4)
- Excellent for lifting from vehicle frame
- **Use with ATD2P12SALI to maintain ALL certification**



TP12SDX-SPNCA



## ATD2P11DXCA GM 2019, WIDER SPIN-UP CRADLE ADAPTERS

- Spin-up cradle adapters (set of 2)
- Wider design for 2019 GM Silverado and Sierra light-duty trucks
- Excellent for lifting from vehicle frame
- Use with ATD2P11BS



# HEAVY-DUTY TWO POST AUTO LIFTS



ATD2P9A

## ATD2P9A TWO POST CLEAR FLOOR

- 9,000 lbs. capacity
- Asymmetric arms
- Rubber door guards
- Chain drive cylinders
- Dual point lock release
- Spin-up lift pads
- Stackable adapters included



ATD2P12F

## ATD2P12F TWO POST FLOOR PLATE

- 12,000 lbs. capacity
- Symmetric arms
- Chain drive cylinders
- Spin-up pads and adapters
- Stackable adapters included




ATD2P12S

## ATD2P12S TWO POST CLEAR FLOOR

- 12,000 lbs. capacity
- Symmetric arms
- Direct push drive
- Single point pneumatic lock release
- Height adapters
- Hose guards


# TWO POST AUTO L



ATD2P12KXCA



ATD2P12KXCA

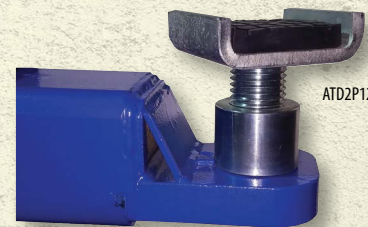

ATD2P12CA

## HEAVY-DUTY TWO POST AUTO LIFTS

Lift Model	ATD2P9A	ATD2P12F	ATD2P12S
Capacity	9,000 lbs.	12,000 lbs.	12,000 lbs.
Height Overall	142-7/8"	121-1/2"	165"
Width Overall w/ Power Unit	138"	147-7/8"	151"
Maximum Lift Height	72"	76-1/2"	72"
Width Between Columns	113-5/8"	120-5/16"	122"
Minimum Pad Height	4"	5"	5-1/2"
Drive Through Clearance	96"	109"	109"
Lifting Speed	50S	45S	50S
Asymmetric / Symmetric	Asymmetric	Symmetric	Symmetric
Clear Floor / Floor Plate	Clear Floor	Floor Plate	Clear Floor
Short Arm Reach - min/max	29"-41"	37"-52-1/2"	37-5/8"-56-3/4"
Long Arm Reach - min/max	37"-57"	Same	Same
Max. Load per Arm	2,250 lbs.	3,000 lbs.	3,000 lbs.
Ship Weight	1,370 lbs.	2,460 lbs.	2,295 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH	220V, 20A, 1PH

## LIFT ACCESSORIES

### ATD2P9CA

#### SPIN-UP CRADLE ADAPTERS - SET OF 4

- Excellent for lifting from vehicle frame
- For use with ATD2P9F, ATD2P9A and ATD2P9S

### ATD2P12KXCA

#### GM 2019+ WIDER

#### SPIN-UP CRADLE ADAPTERS - SET OF 2

- Spin-up cradle adapters (set of 2)
- Wider design for 2019 GM Silverado and Sierra light-duty trucks
- Excellent for lifting from vehicle frame
- For ATD2P12F and ATD2P15S


### ATD2P12CA

#### SPIN-UP CRADLE ADAPTERS - SET OF 4

- Excellent for lifting from vehicle frame
- For ATD2P12F and ATD2P15S

### ATD2P9F TWO POST FLOOR PLATE

- 9,000 lbs. capacity
- Symmetric arms
- Rubber door guards
- Chain drive cylinders
- Dual point lock release
- Auto arm restraint system
- Spin-up lift pads
- Stackable adapters included

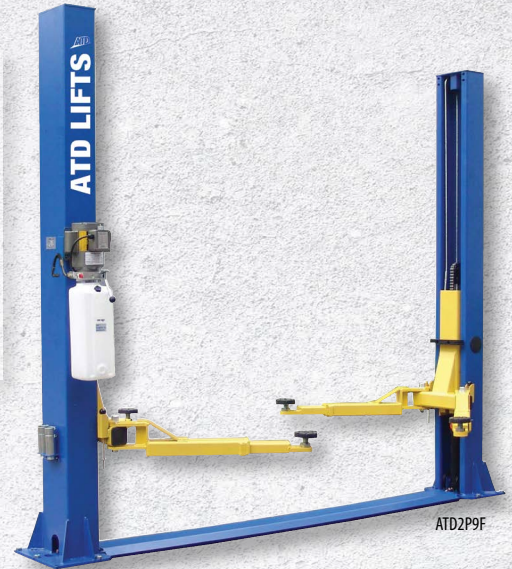

ATD2P9F

### ATD2P9F TWO POST CLEAR FLOOR

- 9,000 lbs. capacity
- Symmetric arms
- Rubber door guards
- Chain drive cylinders
- Dual point lock release
- Auto arm restraint system
- Single piece column
- Internal hose routing
- Low profile, spin-up lift pads
- Stackable adapters included



ATD2P9S



## COMMERCIAL TWO POST AUTO LIFTS

Lift Model	ATD2P9F	ATD2P9S	ATD2P15S
Capacity	9,000 lbs.	9,000 lbs.	15,000 lbs.
Height Overall	111-7/8"	142-7/8"	179-3/8"
Width Overall w/ Power Unit	134-5/8"	138"	148-3/8"
Maximum Lift Height	72"	72"	76-1/2"
Width Between Columns	110-3/8"	113-5/8"	120-3/4"
Minimum Pad Height	4"	4"	5"
Drive Through Clearance	101"	96"	109-3/8"
Lifting Speed	50S	50S	45S
Asymmetric / Symmetric	Symmetric	Symmetric	Symmetric
Clear Floor / Floor Plate	Floor Plate	Clear Floor	Clear Floor
Short Arm Reach - min/max	31"-45"	31"-45"	37"-52"
Long Arm Reach - min/max	Same	Same	Same
Max. Load per Arm	2,250 lbs.	2,250 lbs.	3,750 lbs.
Ship Weight	1,270 lbs.	1,370 lbs.	2,575 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH	220V, 20A, 1PH

### ATD2P15S TWO POST CLEAR FLOOR

- 15,000 lbs. capacity
- Symmetric arms
- Chain drive cylinders
- Spin-up pads and adapters
- Heavy-duty lock release
- Low pad height




ATD2P15S

# LAUNCH TECH USA ALI CERTIFIED TWO POST AUTO LIFTS & ACCESSORIES



TLT210-XT-R  
TLT210-XT-B

TLT210-XT-R

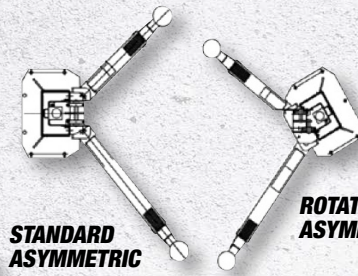

STANDARD ASYMMETRIC

ROTATED ASYMMETRIC



DOUBLE TELESCOPING SCREW PADS



HEAVY-DUTY ARM RESTRAINT



OUTER HOSE GUARD



RUBBER DOOR GUARDS

## TLT210-XT-B (BLUE) TLT210-XT-R (RED) TWO POST CLEAR FLOOR

• **ALI Certified**

- 10,000 lbs. capacity
- Rubber door guards
- Single point lock release
- Double telescoping screw pads
- Stackable foot pad extensions
- 3-Stage front arms

- Direct drive cylinders
- Outer hose guards
- Heavy-duty arm restraint system
- Standard or Rotated Asymmetric columns
- Adjustable column height and width
- Available in Red or Blue



STACKING FOOT PAD EXTENSIONS




ADJUSTABLE COLUMN WIDTH

**LAUNCH TECH USA**



TLT211-AS-R  
TLT211-AS-B

TLT211-AS-B



STANDARD ASYMMETRIC

**LAUNCH**

## TLT210-SPNCA SPIN-UP CRADLE ADAPTERS - SET OF 4

- Excellent for lifting from vehicle frame
- For use with TLT210-XT-R and TLT211-AS-B lifts



## TLT211-AS-R (RED) TLT211-AS-B (BLUE) TWO POST CLEAR FLOOR

• **ALI Certified**

- 11,000 lbs. capacity
- Rubber door guards
- Single point lock release
- Double telescoping screw pads
- Standard Asymmetric columns
- 3-Stage front arms

- Direct drive cylinders
- Outer hose guards
- Heavy-duty arm restraint system
- Adjustable column height
- Stackable foot pad extensions
- Available in Red or Blue

### LAUNCH TECH USA ALI CERTIFIED TWO POST AUTO LIFTS

Lift Model	LAUNCH TECH TLT210-XT-R	LAUNCH TECH TLT211-AS-R
Capacity	10,000 lbs.	11,000 lbs.
Height Overall	145-1/2"-149"	149"
Width Overall w/ Power Unit	Asymmetric - 138" Symmetric - 137"	137-7/8"
Maximum Lift Height	73"	75-5/8"
Width Between Columns	110" / 102"	108"
Minimum Pad Height	4"	4"
Drive Through Clearance	Asymmetric - 88" Symmetric - 98.4"	96"
Lifting Speed	50S	54S
Asymmetric / Symmetric	Symmetric / Asymmetric	Asymmetric
Clear Floor / Floor Plate	Clear Floor	Clear Floor
Short Arm Reach - min/max	23-5/8"-43-1/2"	23-5/8"-39-7/16"
Long Arm Reach - min/max	38-5/8"-61-7/8"	38-5/8"-61-7/8"
Narrow Bay Setting	Deduct 5.9"	n/a
Max. Load per Arm	2,500 lbs.	2,750 lbs.
Ship Weight	1,750 lbs.	2,095 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH


# LAUNCH TECH USA PROFESSIONAL TWO POST AUTO LIFTS & ACCESSORIES



TLT240SC-R

## TLT240SC-R TWO POST CLEAR FLOOR

- 9,000 lbs. capacity
- Chain drive
- Rubber door guards
- Hose guards
- Dual point lock release
- Heavy-duty arm restraint system
- Double telescoping screw pads
- Adjustable column width
- Standard or Rotated Asymmetric columns
- 3-Stage front arms
- Stackable foot pad adapters included

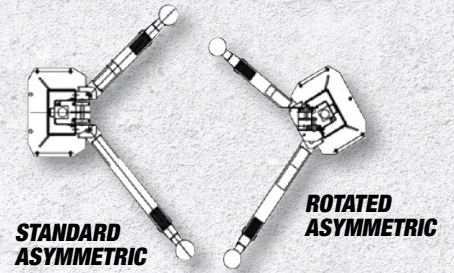

**STANDARD  
ASYMMETRIC**

**ROTATED  
ASYMMETRIC**


**LAUNCH**



TLT240SB-R

## TLT240SB-R TWO POST FLOOR PLATE

- 9,000 lbs. capacity
- Chain drive
- Rubber door guards
- Hose guards
- Dual point lock release
- Heavy-duty arm restraint system
- Double telescoping screw pads
- Stackable foot pad adapters included

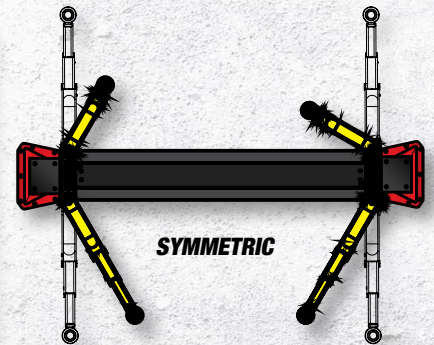

**SYMMETRIC**

LAUNCH TECH USA PROFESSIONAL TWO POST AUTO LIFTS		
Lift Model	LAUNCH TECH TLT240SB-R	LAUNCH TECH TLT240SC-R
Capacity	9,000 lbs.	9,000 lbs.
Height Overall	113"	151"
Width Overall w/ Power Unit	133"	Asymmetric - 140" Symmetric - 134"
Maximum Lift Height	73"	73"
Width Between Columns	108"	108"
Minimum Pad Height	4"	4"
Drive Through Clearance	98"	Asymmetric - 95" Symmetric - 98"
Lifting Speed	50S	50S
Asymmetric / Symmetric	Symmetric	Symmetric / Asymmetric
Clear Floor / Floor Plate	Floor Plate	Clear Floor
Short Arm Reach - min/max	31-1/2"-47-1/4"	23-5/8"-43-1/2"
Long Arm Reach - min/max	Same	34"-54"
Narrow Bay Setting	n/a	Deduct 5.9"
Max. Load per Arm	2,250 lbs.	2,250 lbs.
Ship Weight	1,445 lbs.	1,600 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH

**LAUNCH**

## TLT240-SPNCA SPIN-UP CRADLE ADAPTERS - SET OF 4

- Excellent for lifting from vehicle frame
- For use with TLT240SB-R and TLT240SC-R lifts




# COMMERCIAL SERVICE FOUR POST LIFTS & ACCESSORIES



## ATD4P12CA FOUR POST SERVICE LIFT

- 12,000 lbs. capacity
- Cable driven
- Slack cable safety
- Powder coat finish
- 176" max. wheelbase
- Single point manual lock release
- Adjustable locking positions
- No overhead obstructions

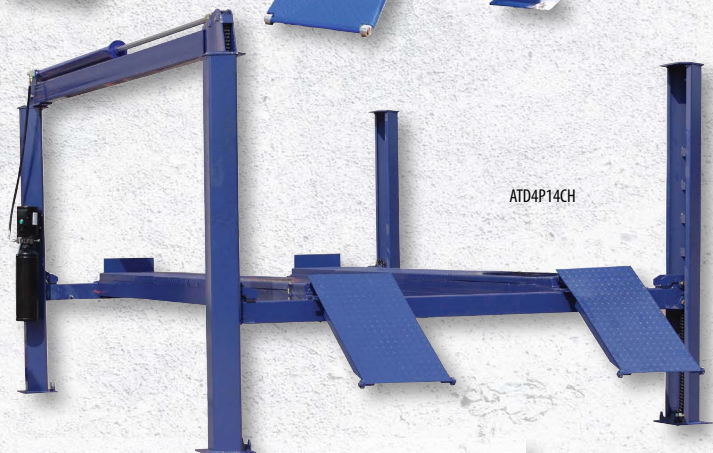

## ATD4P14CH FOUR POST SERVICE LIFT

- 14,000 lbs. capacity
- Chain driven
- 176" max. wheelbase
- Powder coat finish
- Single point pneumatic lock release



	COMMERCIAL SERVICE FOUR POST LIFTS	
	ATD4P12CA	ATD4P14CH
Lift Model	ATD4P12CA	ATD4P14CH
Capacity	12,000 lbs.	14,000 lbs.
Overall Length w/ Ramp	232-1/2"	237"
Overall Width (outside base plates)	123"	123"
Lifting Height	67-1/2"	65-1/4"
Width Between Posts	105"	108"
Width Between Runways	38-1/2"	0 to 41"
Width of Runways	19-1/4"	20-1/4"
Column Height	84"	85"
Max. Wheelbase (2 wheel)	176"	192"
Max. Wheelbase (4 wheel)	n/a	n/a
Ramp Length	30"	30"
Max. Clearance Under Track	63-1/4"	60"
Cable Diameter	7/16"	n/a
Base Plate Dimensions	11" x 11"	10.5" x 10.5"
Ship Weight	2,255 lbs.	2,615 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH

## FOUR POST AUTO LIFT ACCESSORIES



## ATDRAJ6L ROLLING AIR JACK - LOW MOUNT

## ATDRAJ6H ROLLING AIR JACK - HIGH MOUNT

6,000 lbs. Rolling Air Jacks Feature:

- **ATDRAJ6L** - features a low mount design for high position jack rails
- **ATDRAJ6H** - features a high mount design for low position jack rails
- 6,000 lbs. capacity
- Smooth rolling operation
- Protective skirts
- Rubber height adapters (set of 2)
- Adjustable height roller body
- Air/Oil Hydraulic operation
- Two locking positions



## UNIVERSAL ROLLER BODY BRACKET ASSEMBLIES DESIGNED FOR HIGH MOUNT OR LOW MOUNT APPLICATIONS



## ATDRAJ8L ROLLING AIR JACK - LOW MOUNT

## ATDRAJ8H ROLLING AIR JACK - HIGH MOUNT

8,000 lbs. Rolling Air Jacks Feature:


- **ATDRAJ8L** - features a low mount design for high position jack rails
- **ATDRAJ8H** - features a high mount design for low position jack rails
- 8,000 lbs. capacity
- Two locking height positions
- Pneumatic air bag operation (2 bags)
- Smooth "on-rail" rolling with roller bearing wheels
- Adjustable height roller body
- Height adapters (2 sets of 2 each)
- Spring-loaded roller body operation




# COMMERCIAL ALIGNMENT FOUR POST LIFTS & ACCESSORIES

## ATD4P14ALCH FOUR POST ALIGNMENT LIFT

- 14,000 lbs. capacity
- Alignment capable
- Chain driven
- Turntables and jacks sold separately (page 8)
- 167" max. wheelbase (2 wheel)
- Single point pneumatic lock release
- Powder coat finish

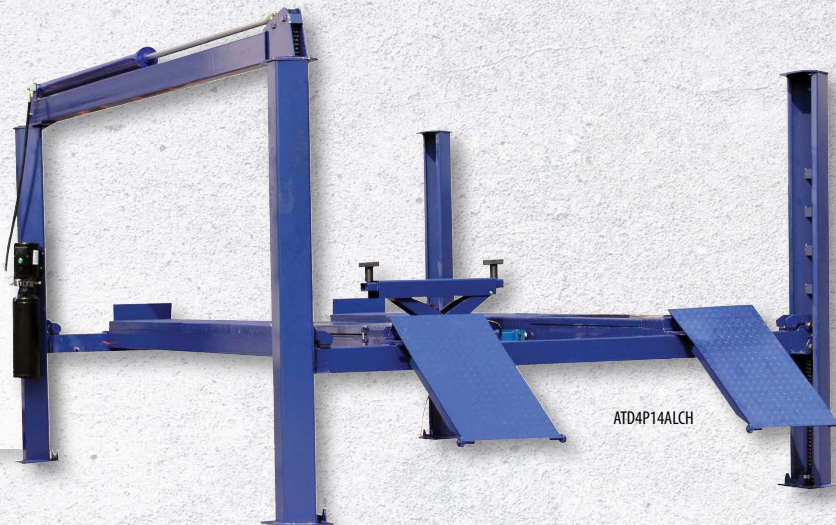


ATD4P14ALCH

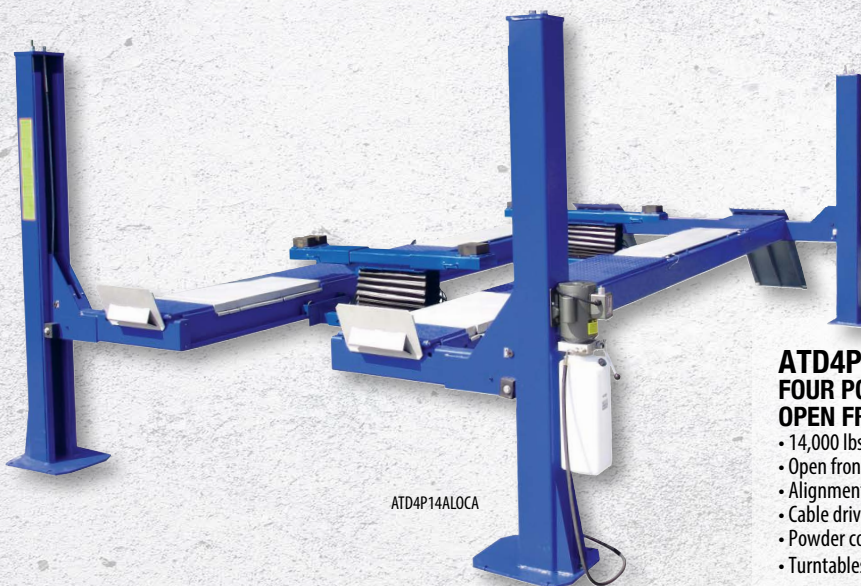

ATD4P14ALOCA

## ATD4P14ALOCA FOUR POST OPEN FRONT ALIGNMENT LIFT

- 14,000 lbs. capacity
- Open front
- Alignment capable
- Cable driven
- Powder coat finish
- Turntables and jacks sold separately (page 8)
- 208" max. wheelbase (2 wheel)
- Single point pneumatic lock release
- Adjustable locking positions
- Slack cable safety
- No overhead obstructions

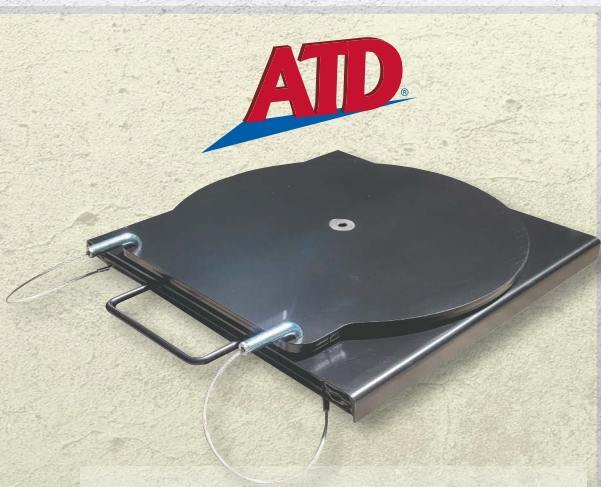


## TURNTABLE-25-152 ALIGNMENT LIFT TURNTABLES - SET OF 2

- Round plate design
- Heavy-duty
- 13" L x 13" W x 2" H
- 9,000 lbs. total set capacity

Lift Model	COMMERCIAL ALIGNMENT FOUR POST LIFTS	
	ATD4P14ALCH	ATD4P14ALOCA
Capacity	14,000 lbs.	14,000 lbs.
Overall Length w/ Ramp	237"	291"
Overall Width (outside base plates)	123"	139"
Lifting Height	67"	73"
Width Between Posts	108"	116"
Width Between Runways	0 to 41"	43"
Width of Runways	20-1/4"	19"
Column Height	85"	92" / 86"
Max. Wheelbase (2 wheel)	167"	208"
Max. Wheelbase (4 wheel)	152"	158"
Ramp Length	30"	42"
Max. Clearance Under Track	60"	64"
Cable Diameter	n/a	7/16"
Base Plate Dimensions	10.5" x 10.5"	18" x 19" / 12" x 12"
Ship Weight	3,240 lbs.	4,160 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH

# NEW!

## COMMERCIAL SERVICE FOUR POST LIFTS & ACCESSORIES

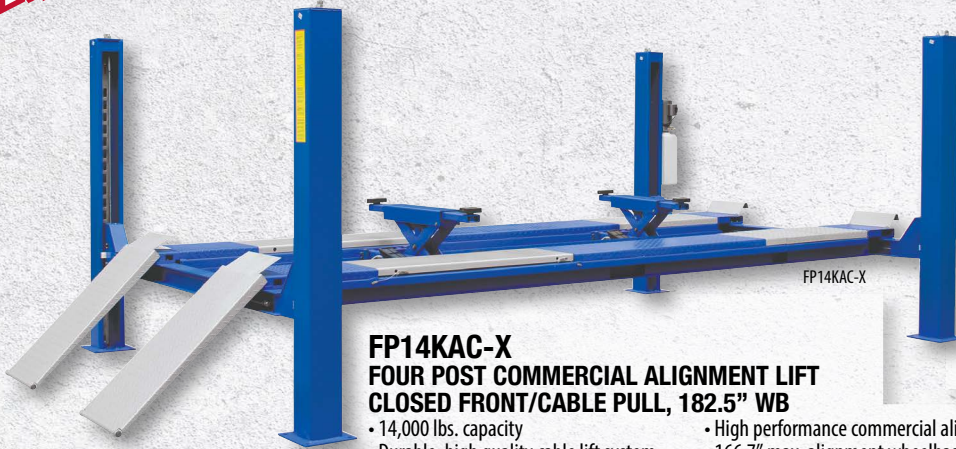

### FP14KAC-X FOUR POST COMMERCIAL ALIGNMENT LIFT CLOSED FRONT/CABLE PULL, 182.5" WB


- 14,000 lbs. capacity
- Durable, high quality cable lift system
- Extended rise height
- "Bolt-on" runway alignment kit
- 182.5" max. service wheelbase
- (18) locking height positions
- Full width rear slip plates
- 20" wide runways
- Slack cable safety devices
- Durable powder coat finish
- High performance commercial alignment lift
- 166.7" max. alignment wheelbase (2 wheel)
- 157" max. alignment wheelbase (4 wheel)
- Two turntable positions with spacer covers
- Narrow and wide runway mounting positions
- Fully adjustable lock stops for easy leveling
- Self-checking approach ramps with nylon rollers
- Single point pneumatic lock release
- Wheel chocks (1 pair)

#### FP14KAC-X "OPTIONAL" ACCESSORIES:

- 7,000 lbs. Rolling Bridge Jack RAJ-7K-H
- 24" Runway Extension Kit FP14KCX-24EXTKIT
- 24" Alignment Spacer Kit FP14KCX-24ALIGNSPCRKIT

#### FP14KAC-X "INCLUDED" ACCESSORIES:

- Internal Airline Kit w/FRL FP14KCX-ALK
- HD Carbon Steel Turntables 4.5K capacity each - FP14KCX
- Rollback Spacers for HD Turntables TURNTABLE-RBSPCR

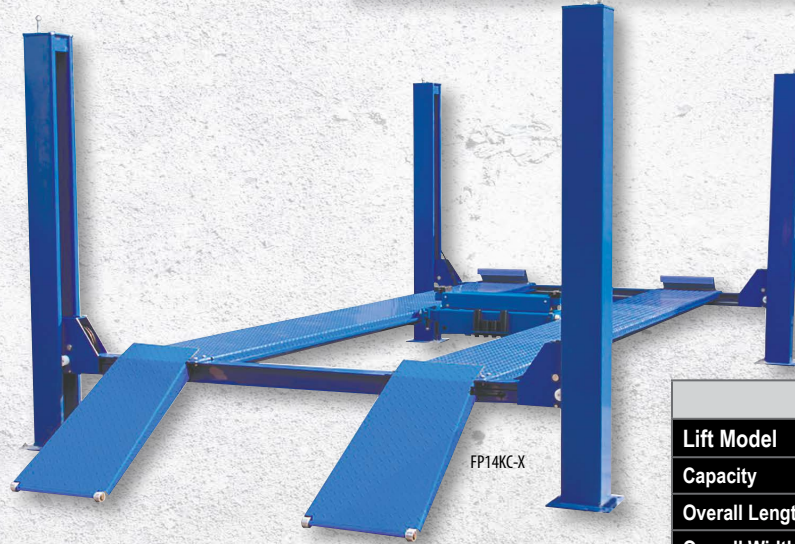

#### FP14KC-X ADDITIONAL FEATURES:

- Extend runways 24" with extension kit
- High quality Duro Power Unit w/UL listed motor and electrical components
- Grease zerks applied for all cable pulleys and shaft assemblies for durability
- Converts to alignment lift with "Quick Mount Bolt-On" alignment kit
- Designed for fast, simple installation and service requirements

### FP14KC-X FOUR POST COMMERCIAL SERVICE LIFT CLOSED FRONT/CABLE PULL, 182.5" WB

- 14,000 lbs. capacity
- High performance commercial service lift
- Durable, high quality cable lift system
- Extended rise height
- 182.5" max wheelbase
- (18) locking height positions
- 20" wide runways
- Narrow and wide runway mounting positions
- Single point pneumatic lock release
- Fully adjustable lock stops for easy leveling
- Slack cable safety devices
- Self-checking approach ramps with nylon rollers
- Wheel chocks (1 pair)
- Durable powder coat finish

#### COMMERCIAL SERVICE FOUR POST LIFTS

Lift Model	FP14KAC-X	FP14KC-X
Capacity	14,000 lbs.	14,000 lbs.
Overall Length with Ramp	252-1/2"	252-1/2"
Overall Width (w/out power unit)	131-7/8"	131-7/8"
Overall Width (with power unit)	142"	142"
Overall Height	92-1/2"	92-1/2"
Max Rise Height	80-3/4"	78-3/4"
Min Height	9-7/8"	7-7/8"
Width Between Posts	116-1/4"	116-1/4"
Length Between Posts	196"	196"
Width Between Runways	43" or 46"	43" or 46"
Width of Runways	20"	20"
Max Wheelbase	182-1/2"	182-1/2"
Max Align Wheelbase (2 Wheel)	166-3/4"	n/a
Min/Max Align Wheelbase (4 wheel)	103" / 157"	n/a
Ramp Length	44"	44"
Max Clearance Under Runway	69-5/8"	69-5/8"
Drive-Thru Clearance	100"	96"
Base Plate	10-1/2" x 9"	10-1/2" x 9"
Power Requirement	220V, 20 Amp, 1PH	220V, 20 Amp, 1PH
Ship Weight	3,810 lbs.	2,690 lbs.
Min Bay Size	16' x 25'	16' x 25'


# NEW! COMMERCIAL FOUR POST KITS & ACCESSORIES



## RAJ-7K-H 7,000 LBS. ROLLING AIR JACK - HIGH MOUNT


**7,000 lbs. Rolling Air Jacks Feature:**

- **RAJ-7K-H** - features a high mount design for low position jack rails
- **RAJ-7K-L** - features a low mount design for high position jack rails
- Rubber height adapters (set of 2)
- Two locking height positions

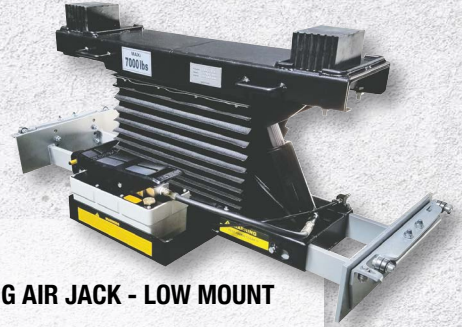

## RAJ-7K-L 7,000 LBS. ROLLING AIR JACK - LOW MOUNT

- Adjustable height roller body assemblies
- Dual spring-loaded roller body operation
- Telescoping and locking support arms
- Protective skirts
- Smooth on-rail rolling with roller bearing wheels
- Air/Hydraulic operation



## TURNTABLE-RBSPCR TURNTABLE, ROLLBACK SPACER - SET OF 2

- Designed for use with TURNTABLE-FP14KCX
- Provides level surface to runways
- Handles for easy positioning
- Metal construction
- Durable powder coat finish



## TURNTABLE-FP14KCX TURNTABLE - SET OF 2

- High quality construction
- Heavy-duty carbon steel top plate
- Handles on base for easy positioning
- 14" L x 14" W x 1.5" H
- 9,000 lbs. total set capacity




## TURNTABLE-FP14KCX-DK TURNTABLES AND ROLLBACK SPACERS - DELUXE KIT

- Designed for use with FP14KCX-ALIGNKIT and FP14KAC-X Lift models
- Includes TURNTABLE-FP14KCX (set of 2)
- Includes turntable ROLLBACK SPACERS (TURNTABLE-RBSPCR)



## FP14KCX-ALIGNKIT ALIGNMENT KIT, "BOLT-ON"

- Designed to convert the FP14KCX-X Service Lift to an Alignment Lift
- Alignment kit quickly bolts to pre-drilled holes in FP14KCX-X runways
- Provides alignment to max. wheelbases of 166.7" (2 wheel) and 157" (4 wheel)
- Includes rear slip plates, center panels, turntable saddles and cutouts
- Provides a level surface from turntable cutouts to rear slip plates
- Nylon saddle pads for easy, protective turntable positioning
- Turntable spacer covers and extended height wheel stops
- Includes all mounting hardware
- Durable powder coat finish
- **Turntables NOT included**

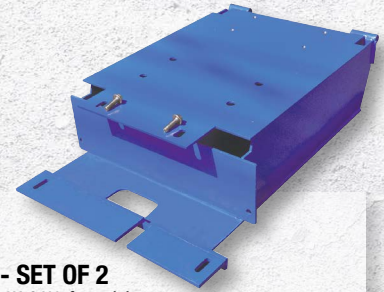

## FP14KCX-24EXTKIT 24" RUNWAY EXTENSION KIT - SET OF 2

- Designed for use with FP14KCX-X and FP14KAC-X Lift models
- Lengthens runways by 24" for extended wheelbase requirements
- Extends FP14KCX-X Lift to 206" max. service wheelbase
- Extends FP14KAC-X\* to 190.7" max. alignment wheelbase (2 wheel)
- **\*FP14KCX-24ALIGNSPCRKIT is required to extend FP14KAC-X alignment runways**
- Easy bolt-on design
- Includes all mounting hardware
- Durable powder coat finish



## FP14KCX-ALK AIRLINE KIT WITH FRL

- Designed for use with FP14KCX-X Lift and RAJ-7K Rolling Bridge Jack models
- Includes coiled hoses, air tubing, air fittings, and quick disconnect fittings to RAJs
- Includes FRL (Filter/Regulator/Lubricator)
- Quick retrofit installation design
- Includes all mounting hardware




## FP14KCX-24ALIGNSPCRKIT 24" EXTENSION, ALIGNMENT SPACER KIT - SET OF 2

- Designed for use with FP14KCX-ALIGNKIT
- Provides elevated and level surface from extensions to runways
- Easy bolt-on design
- Includes all mounting hardware
- Durable powder coat finish

# ALIGNMENT MACHINES

## ATDIWA60 HIGH DEFINITION 3D IMAGE WHEEL ALIGNER SYSTEM

- High resolution, 3D cameras
- Semi-automatic, adjustable height camera boom
- Alignment software - includes data (updates available)
- Compact mini-style targets
- Wheel clamps
- Steering wheel holder
- Brake depressor
- Wheel chocks
- Mobile, multi-bay capable
- German engineered alignment software
- FRONT, REAR, ALL zoom readings
- Graph and meter screens
- Pre-installed 25+ spec years comprehensive database
- Illustration diagrams and integrated help system
- Advanced, editable customer database
- Multi-function LEDs guide setup and runout
- Vehicle inspection/worksheet screen
- Works with multiple style alignment lifts
- Computer, keyboard, mouse and color printer included

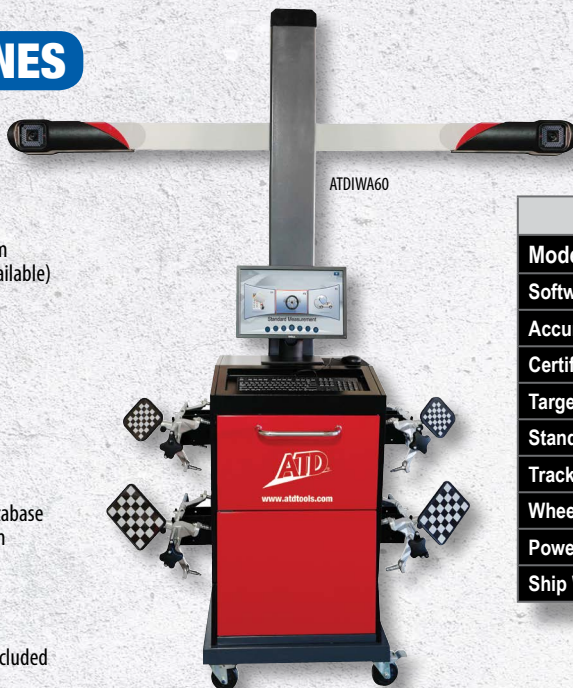

ALIGNMENT MACHINE	
<b>Model Number</b>	<b>ATDIWA60</b>
<b>Software</b>	SureAlign 4.0
<b>Accuracy</b>	0.01 degree
<b>Certification</b>	CE
<b>Target Size (4)</b>	Mini
<b>Standard Wheel Clamps (4)</b>	13"-25"
<b>Track Width</b>	63"-82.5"
<b>Wheelbase</b>	71"-177"
<b>Power</b>	110/120V, 60Hz, 15 Amp, 1 PH
<b>Ship Weight</b>	600 lbs. (2 cartons)




ALIGNMENT MACHINE	
<b>Model Number</b>	<b>IWA-60-8500-HD-K</b>
<b>Operating System</b>	Windows
<b>Software</b>	Techno Vector 7
<b>Accuracy</b>	0.01 degree
<b>Certification</b>	CE
<b>Target Size (8)</b>	Standard
<b>Standard Wheel Clamps (8)</b>	15"-27"
<b>Cameras (Total)</b>	4
<b>Lift Compatible</b>	No
<b>4 Post Hoist Compatibility</b>	No
<b>Toe Adjustment</b>	Yes
<b>Lifted Runout</b>	Yes
<b>Live Caster</b>	Yes
<b>Runout Compensation</b>	Yes
<b>Wheel Alignment Modes</b>	Variable 2-8 wheels
<b>Database Update</b>	Yes
<b>Customer Manager</b>	Yes
<b>Max Width</b>	Up to 13 feet
<b>Max Wheelbase</b>	Up to 50 feet
<b>Power</b>	120V, 15 Amp, 1 Phase, 60Hz
<b>Ship Weight</b>	1,285 lbs. (3 pcs.)

## IWA-60-8500-HD-K 3D HEAVY-DUTY MULTI-AXLE IMAGE WHEEL ALIGNER SYSTEM

- Multi-axle floor alignment system - no vehicle lift required
- Designed to measure long vehicles and vehicles with trailers
- Dynamic LED tower guide changes shape to guide technician
- Mobile cabinet allows for side or front centered placement
- 8 each compact lightweight targets
- Convenient storage stands for wheel clamps
- Dual towers provide max view range up to 50 ft.
- Live reading screens for front and rear axle readings
- Recalls, prints current and past info for customized reports
- Optional yearly vehicle spec updates
- High resolution, extended range 3D tower cameras measure up to four axles at once
- Includes heavy-duty turntable and drive-on floor ramp sets for quick, easy front end alignments
- Integrated quick reference vehicle database for commercial vehicles
- Drive-over cable plates included for "drive-through" or "dead-end" set-up configurations
- 8 each adjustable wheel clamps 15" to 27", fits most standard rim sizes
- Wireless remote control operation when unable to reach cabinet and keyboard
- Illustration diagrams and integrated help system
- Steering wheel holder, brake depressor and wheel chocks included
- Computer, monitor, keyboard, mouse and color printer also included
- Convenient customer database feature



# STORAGE LIFTS

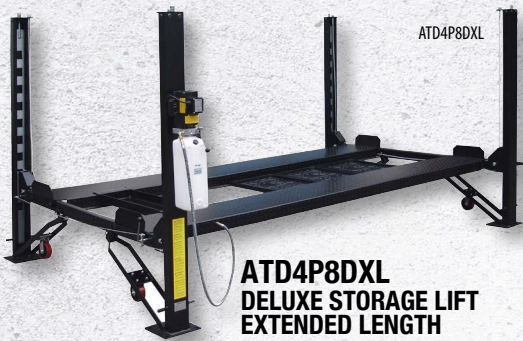

**ATD4P8DXL  
DELUXE STORAGE LIFT  
EXTENDED LENGTH**

- 8,000 lbs. capacity
- Extended lift height and length
- Cable driven
- Single point manual lock release
- Adjustable locking positions
- Slack cable safety
- Steel approach ramps
- Fits in larger residential garages
- Great for storage of many full size trucks
- Includes drip trays, jack tray and poly caster kit



**ATD4P8B  
BASIC STORAGE LIFT**

- 8,000 lbs. capacity
- Cable driven
- Single point manual lock release
- Adjustable locking positions
- Slack cable safety
- Steel approach ramps
- Fits in most residential garages
- No caster kit, drip trays or jack tray



**ATD4P9DXL  
DELUXE STORAGE LIFT  
EXTENDED LENGTH**

- 9,000 lbs. capacity
- Industry leading runway length and drive-thru width
- Cable driven
- Single point manual lock release
- Adjustable locking positions
- Slack cable safety
- Steel approach ramps
- Great for storage and/or general commercial service
- Includes drip trays, jack tray and poly caster kit



**ATD4P8D  
DELUXE STORAGE LIFT**

- 8,000 lbs. capacity
- Cable driven
- Single point manual lock release
- Adjustable locking positions
- Slack cable safety
- Steel approach ramps
- Fits in most residential garages
- Includes drip trays, jack tray and poly caster kit

## SINGLE POST LIFT



**ATD1P6  
SINGLE POST STORAGE LIFT**

- 6,000 lbs. capacity
- Can be installed to lift from left or right side
- Low profile approach ramps for vehicles with low ground clearance
- Low post height allows for low ceiling residential installation
- Commercial grade hydraulic cylinder and heavy-duty leaf chain
- Reliable DURO electric/hydraulic pump

Lift Model	STORAGE LIFTS				SINGLE POST LIFT
	ATD4P8B	ATD4P8D	ATD4P8DXL	ATD4P9DXL	ATD1P6
Capacity	8,000 lbs.	8,000 lbs.	8,000 lbs.	9,000 lbs.	6,000 lbs.
Overall Length w/ Ramp	207-5/16"	207-5/16"	222-1/2"	239"	188"
Overall Width (outside base plates)	103-1/2"	103-1/2"	109-3/8"	123"	112-3/16"
Overall Height	86"	86"	94"	97"	110-1/4"
Lifting Height	74-3/4"	74-3/4"	82-1/4"	85"	81-3/16"
Width Between Posts	94-1/2"	94-1/2"	100-5/16"	111-1/2"	n/a
Length of Runways	165-1/2"	165-1/2"	180-1/2"	188-1/2"	152"
Width of Runways	18-5/8"	18-5/8"	18-5/8"	20"	18-7/8"
Lifting Speed	90S	90S	100S	100S	90S
Cable Diameter	3/8"	3/8"	3/8"	3/8"	3/8"
Max. Clearance Under Track	70"	70"	78"	81"	77-3/16"
Base Plate Size	10" x 12"	10" x 12"	10" x 12"	12" x 12"	52" x 39"
Lock Position	10	10	12	11	19
Ship Weight	1,545 lbs.	1,705 lbs.	1,800 lbs.	2,354 lbs.	2,610 lbs.
Power	115V, 20A, 1PH	115V, 20A, 1PH	115V, 20A, 1PH	115V, 20A, 1PH	115V, 20A, 1PH

## STORAGE LIFT ACCESSORIES



### ATD4P8DT 37" WIDE DRIP TRAYS (SET OF 3)


Drip trays are used for catching leaks from getting on the bottom car when the lift is used for storage

- Use with ATD4P8B and ATD4P8D

### ATD4P8DTXL 42" WIDE DRIP TRAYS (SET OF 3)


Drip trays are used for catching leaks from getting on the bottom car when the lift is used for storage

- Use with ATD4P8DXL

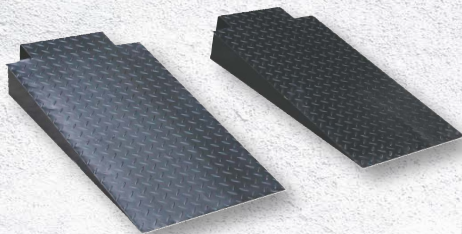

### ATD4P8SR STEEL RAMPS (SET OF 2)

- Durable steel construction
- 36-3/4" long
- Use with ATD4P8B, ATD4P8D and ATD4P8DXL

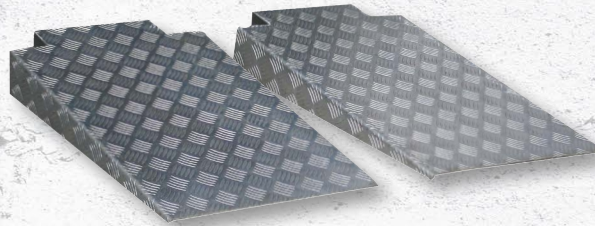

### ATD4P7AR ALUMINUM RAMPS (SET OF 2)

- Lightweight aluminum construction
- 37" long
- Use with ATD4P8B, ATD4P8D and ATD4P8DXL




### ATD4P8C 6" POLY CASTER KIT (SET OF 4)

- Durable 6" poly caster wheels
- Heavy-duty caster brackets
- All hardware included
- Use with ATD4P8DXL, ATD4P8B and ATD4P8D



### ATD4P7JT JACK TRAY

- Load bearing tray can be used as a tool or a parts tray, also supports bottle jacks and jack stands
- 42" x 12"
- Use with ATD4P8DXL



### ATD90BK DURO POWER UNIT 90° BRACKET KIT

- Durable powder coat finish
- Relocates power unit to side of column
- Designed to reduce overall lift width
- Mounts to **FRONT** or **REAR** of power unit column on ATD4P9DXL
- Mounts only to **REAR** power unit column on ATD4P8 Series lifts
- All hardware included

## STORAGE LIFT SCISSOR JACKS



### ATDSJ3500 SLIDING SCISSOR JACK

- 3,500 lbs. capacity
- Sliding operation
- Hand Pump (no air required)
- 3 locking positions
- Low profile design
- Compatible with many storage lifts brands
- Includes lift pads and height extensions
- Use with ATD4P8D, ATD4P8B and ATD4P8DXL



### ATDRJ4500 ROLLING SCISSOR JACK

- 4,500 lbs. capacity
- Smooth rolling operation
- Hand Pump (no air required)
- 3 locking positions
- Low profile design
- Jack rail required
- Includes lift pads and height extensions
- Use with ATD4P9DXL

## ATDSC2SL SINGLE POST PLATFORM STORAGE LIFT

- 2,000 lbs. capacity
- Electric hydraulic operation
- Space saving design
- Removable center panel under vehicle access
- Use for ATV, lawnmower, riding mower
- Reliable 110V DURO electric/hydraulic pump
- Optional Vise Attachment (ATDSC2MA) for use with motorcycles

## ATDSC2MA MOTORCYCLE VISE ATTACHMENT FOR ATDSC2SL

- Allows motorcycle service and storage



Lift Model	ATDSC2SL
Capacity	2,000 lbs.
Width Overall	64-5/8"
Height Overall	84-1/2"
Depth/Length Overall	69-1/2"
Lift Rise Height	58"
Platform Minimum Height	2-3/4"
Platform Frame	64-1/2" W x 47-3/8" D
Platform Aluminum Deck	36" W x 48" D
Platform Structure	64-1/2" W x 52-5/8" D
Ship Weight	605 lbs.
Power	115V, 20A, 1PH




**IDEAL FOR UTILITY,  
POWER SPORT AND  
RECREATIONAL VEHICLES!**

Lift Model	ATDMSC6
Capacity	6,000 lbs.
Width Overall	45-3/16"
Height Overall	102-3/8"
Depth/Length Overall	101-9/16"
Lift Rise Height	72"
Minimum Ceiling Height	9 ft.
Swivel Pad Height	3-15/16"–6-5/16"
Platform Minimum Height	n/a
Main Side Arm Reach	19-11/16"–26"
Off Side Arm Reach	24-5/8"–34"
Drive Over Height	3-15/16"
Ship Weight	1,850 lbs.
Power	115V, 20A, 1PH

## ATDMSC6 MOBILE SINGLE COLUMN LIFT

- 6,000 lbs. capacity
- Heavy-duty arm restraints
- Durable powder coat finish
- Low profile design under 4"
- Double telescoping screw pads
- Stackable pad height extensions (2 sets of 4 each - 2" and 4")
- Portability
- Drive over ramps
- 21 locking positions
- Rigid base construction
- Single point lock release
- Telescoping two-stage swing arms

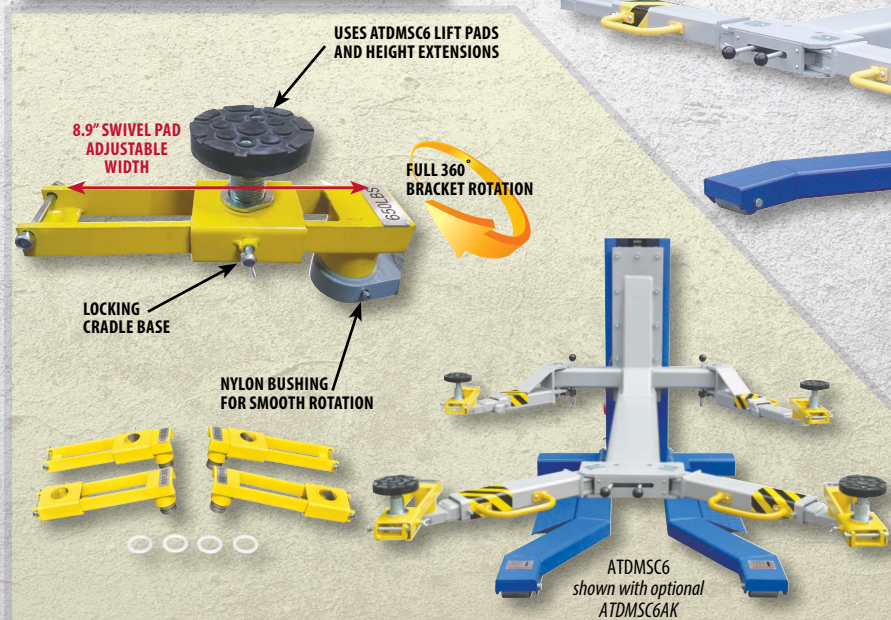

## ATDMSC6AK UTV ADAPTER KIT FOR ATDMSC6

- 2,600 lbs. capacity (650 lbs. per adapter)
- Durable powder coat finish
- Adjustable width and 360° bracket rotation
- Extends spin-up pad lifting range by 8.9" per arm
- Adjustable width locking cradle base for lifting pads
- Ideal for utility, power sport and recreational type vehicles
- Quick and easy installation and removal
- Kit design uses ATDMSC6 spin-up lift pads and height extensions

# SCISSOR LIFTS AND ACCESSORIES



ATDMSC6

## ATDSL6L LOW-RISE PIT LIFT


- 6,600 lbs. capacity
- Low drive over height
- Pit lift to extend quick lube services
- Includes power unit and stand
- Floor mounted design
- Single point pneumatic lock release
- Rubber spacer blocks included



ATDMSC6

## ATDSL6L MID-RISE SCISSOR LIFT

- 6,000 lbs. capacity
- Portable design
- Single point lock release
- Durable rubberized lift pads
- 48" rise height
- Dolly mounted power unit
- Extended adjustable lift arms

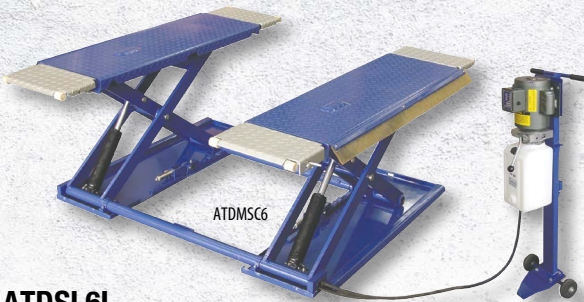

ATDMSC6

## ATDSL6L MID-RISE SCISSOR LIFT

- 6,500 lbs. capacity
- Dolly mounted power unit
- Load bearing flip-up ramp extensions
- Portable design
- Single point pneumatic lock release



ATDMSC6

## ATDSL6L LOW-RISE PAD LIFT

- 6,000 lbs. capacity
- Low drive over height of 3"
- Rubber spacer blocks included
- Optional SUV Adapters for frame lifting (ATDSL6A)
- Dolly mounted power unit
- Automatic safety lock
- Excellent for tire and wheel service



ATDMSC6

ATDMSC6

ATDMSC6

ATDMSC6

	LOW-RISE SCISSOR LIFTS		MID-RISE SCISSOR LIFTS	
	ATDSL6L	ATDPL6	ATDSL6PM	ATDSL6M
<b>Lift Model</b>	ATDSL6L	ATDPL6	ATDSL6PM	ATDSL6M
<b>Capacity</b>	6,000 lbs.	6,600 lbs.	6,500 lbs.	6,000 lbs.
<b>Overall Length</b>	86"	83-1/4"	77"	96-1/2"
<b>Overall Width</b>	73"	66"	75-1/4"	39-5/8"-62"
<b>Lifting Height</b>	26"	28-1/2"	38"	48-1/2"
<b>Minimum Pad Height</b>	3"	4-1/4"	4"	7"
<b>Lifting Height w/ Adapters</b>	30"	30"	39-1/2"	54"
<b>Width Between Runways</b>	35"	0 to 29-1/2"	33-1/4"	n/a
<b>Width of Runways</b>	19"	18"	18-3/16"	n/a
<b>Lifting Speed</b>	35S	40S	40S	40S
<b>Pad Length</b>	52"	53"	56"	24" min. / 83" max.
<b>Ship Weight</b>	955 lbs.	770 lbs.	1,355 lbs.	945 lbs.
<b>Power</b>	115V, 20A, 1PH	115V, 20A, 1PH	115V, 20A, 1PH	115V, 20A, 1PH

## ATDSL6SAK 1-1/2" HEIGHT ADAPTERS (SET OF 4) FOR ATDSL6M

## ATDSL6MAK 2" HEIGHT ADAPTERS (SET OF 4) FOR ATDSL6M

## ATDSL6TAK 5" HEIGHT ADAPTERS (SET OF 4) FOR ATDSL6M


## ATDPL6HA HEIGHT ADAPTERS (2 SETS/4 EA.) FOR ATDPL6AK

• (4 each) 5" (high) and (4 each) 2.5" (low) adapters



## ATDPL6AK PIT LIFT RADIAL ARM KIT

- Allows frame lifting with pad contacts
- Adapter arms length - 16-1/2" to 23"
- Durable rubberized lift pads
- For use with ATDPL6 only

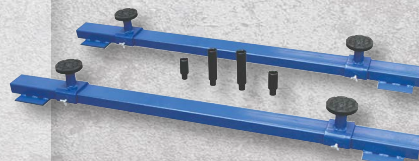

## ATDSL6A SUV ADAPTER SET

- Use with ATDSL6PM and ATDSL6L



**USE FOR INSPECTIONS & OIL CHANGES, BRAKE & WHEEL SERVICE JOBS, EXHAUST & TRANSMISSION SERVICE, PAINT SPRAY BOOTHS, AUTOBODY REPAIRS, AUTO DETAILING & WRAPPING, SHOWCASE CHASSIS AT TRADE SHOWS**



- SAFELY LIFTS AND TILTS UNIBODY VEHICLES WITH 48" TO 61" FRAME RAIL WIDTHS
- ALLOWS FOR COMFORTABLE WORK HEIGHT AND UNDERCARRIAGE ACCESS
- ADDS INSPECTION AND SERVICE CAPABILITIES FOR REPAIR SHOPS


**NEW!**

## ATDTLTLFT AUTOMOTIVE TILT LIFT


- Industry leading 7,000 lbs. capacity
- Handheld drill operation - no hydraulics
- Low-profile, lightweight, portable and storable
- Exclusive dual independent safety lock bars and pins allow for full operation from either side of lift
- Twin dual action precision gear drives
- Adjustable width platforms
- Easy to use and maintain
- Max Lift Height: 22-1/2" (23-1/2" w/Risers)
- Lift Dimensions: 51-3/4" L x 64-3/8" W x 4-1/2" H
- Lift Speed: 30-40 sec.
- Platform Length and Width: 31-1/2" x 7-1/4"
- Outside - Platforms Widths: 59-1/4" to 63-3/4"
- Inside - Platforms Widths: 44-1/2" to 49-1/4"
- Power (Corded Drill): 10 Amp, 120V AC, 1/2"
- Durable powdercoat finish
- Weather resistant for indoor or outdoor use
- 1 year limited warranty
- Includes jack stand, platform risers, drill-drive adapters, wall mount brackets, and manual handle with socket adapter
- Optional Floor Rail Kit ATDTLTLFTFR
- **Power drill NOT included**
- Ship Weight: 214 lbs.

Lift Model	ATDMSC6
Lift Capacity	7,000 lbs.
Overall Length	51-3/4"
Overall Width	64-3/8"
Min Height	4-1/2"
Max Lift Height	22-1/2"–23-1/2" w/risers
Lift Speed	30–40 sec.
Platform Length x Width	31-1/2" x 7-1/4"
Outside - Platforms Widths	59-1/4"–63-3/4"
Inside - Platforms Widths	44-1/2"–49-1/4"
Power (Corded Drill - not included)	10 Amp, 120V AC, 1/2"
Ship Weight	214 lbs.

## Standard Accessories (included)

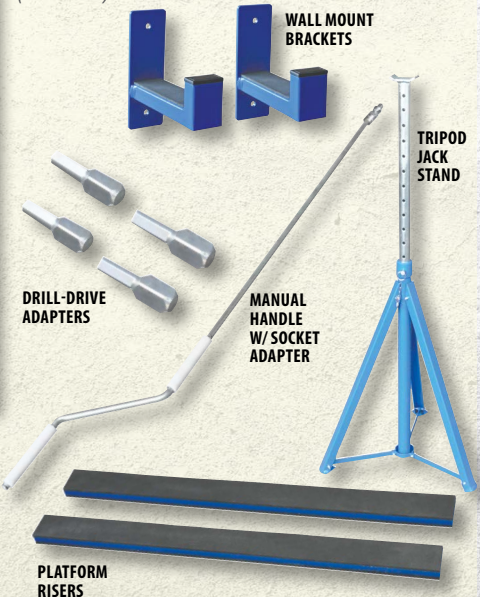

**IDEAL FOR USE IN RESIDENTIAL GARAGES, AUTO SERVICE SHOPS, AUTOBODY REPAIR CENTERS, CAR DEALERS OR FOR DETAILING!**

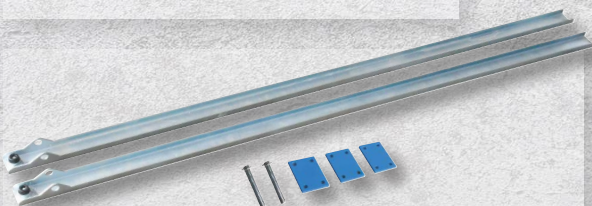

## ATDTLTLFTFR TILT LIFT FLOOR RAIL KIT

- Required for insufficient floor surfaces, such as uneven or rough floors.
- Reduces lift's wheel travel marks for polished or epoxied type floors



# HEAVY-DUTY MOBILE COLUMN LIFTS & ACCESSORIES

**ATDMSC132**  
**13,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT**  
*(2 COLUMN SET - 26,000 LBS. TOTAL CAPACITY)*

**ATDMSC13**  
**13,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT**  
*(4 COLUMN SET - 52,000 LBS. TOTAL CAPACITY)*

**ATDMSC136**  
**13,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT**  
*(6 COLUMN SET - 78,000 LBS. TOTAL CAPACITY)*

- Available in two (26K), four (52K), or six (78K) column configurations
- Up to 78,000 lbs. capacity
- Easy to use control panel
- Battery operated with onboard charging system
- Convenient operation from any column
- Independent mechanical locking system
- Small footprint allows for out of the way storage using pallet jack style base
- Adjustable fork accommodates many wheel sizes
- Direct drive hydraulic cylinders
- Easily moved for operation in multiple bays
- Optional accessories for expanded service operations
- Batteries not included



ATDMSC13



HEAVY-DUTY MOBILE COLUMN LIFTS			
Lift Model	ATDMSC132	ATDMSC13	ATDMSC136
Column Configuration	2 Column	4 Column	6 Column
Capacity	26,000 lbs.	52,000 lbs.	78,000 lbs.
AC Power (Input per column)	100-140V AC, 60Hz, 1 PH		
DC Power (output per column)	24V DC		
Lifting Height	67.1"		
Column Heights - Min./Max.	Min. 88.6"/Max. 155.5"		
Column Width	44.1"		
Fork Adjustable Range	6.3"-22"		
Fork Length	14"		
Fork to Column Clearance	9.3"		
Rise Time/Descernt Time	75S/60S		
Max. Distance Between Columns	32'-8"		
Mini. Concrete Surface Strength	3000 psi		
Set Up/Operation	Indoors		
Battery Type Recommended	12V DC Sealed Deep Cycle Battery (BCI Group 31, AH-105) - not included		
Ship Weight	1,210 lbs. per column		



**MSC-44K-STAND-26**  
**HEAVY-DUTY LOW-RISE STAND**

**MSC-44K-STAND-46**  
**HEAVY-DUTY MID-RISE STAND**

- 20 Ton max. support capacity (40,000 lbs.)
- Quality built professional screw style jack stand
- Adjustable heights 16"-26" (MSC-44K-STAND-26)
- Adjustable heights 26"-46" (MSC-44K-STAND-46)
- Swivel style precision lift support with locking collar
- Easy to turn handle for accurate height adjustment
- Wide base provides optimal jack stability support



**ATDMSC18RC**  
**HANDHELD REMOTE CONTROLLER**

- Works only with ATDMSC13 Series columns
- Quick, secure "screw lock" plug connection to ATDMSC13 Series columns



**MSC-FL-RAMPSET**  
**FORKLIFT RAMP SET**

- 20,000 lbs. max. support capacity (10,000 per ramp and platform)
- Allows forklift to be driven onto elevated lifting position
- Designed to work in conjunction with forklift spacers
- Works with both MSC18K-X and ATDMSC13 Series lifts



**MSC-STAND18X**  
**HEAVY-DUTY HIGH RISE STAND**

• **ALI Certified**

- 18,000 lbs. max. support capacity
- Adjustable pillar height with spring assist
- Locking heights 48-5/8"-69-7/8"
- Easy stand positioning with spring loaded casters
- Foldable leg design provides additional storage space



# IDEAL ALI CERTIFIED HEAVY-DUTY MOBILE COLUMN LIFTS & ACCESSORIES



LED LIGHT WITH MAGNETIC BASE



MSC-18K-X-236  
MSC-18K-X-472  
MSC-18K-X-6108



MSC-18K-X-472

IDEAL ALI CERTIFIED MOBILE COLUMN LIFTS			
Lift Model	MSC-18K-X-236	MSC-18K-X-472	MSC-18K-X-6108
Column Configuration	2 Column	4 Column	6 Column
Capacity	36,000 lbs.	72,000 lbs.	108,000 lbs.
AC Power (Input per column)	100-140V AC, 60Hz, 1 PH		
DC Power (output per column)	24V DC		
Lifting Height	67.1"		
Column Heights - Min./Max.	Min. 88.6"/Max. 155.5"		
Column Width	44.1"		
Fork Adjustable Range	12.6"-22"		
Fork Length	17.9"		
Fork to Column Clearance	10"		
Rise Time/Descent Time	100S/60S		
Max. Distance Between Columns	32'-8"		
Minimum Concrete Surface Strength	3000 psi		
Set Up/Operation	Indoors		
Battery Type Recommended	12V DC Sealed Deep Cycle Battery (BCI Group 31, AH-105) - not included		
Ship Weight	1,584 lbs. per column		

## MSC-18K-X-236

18,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT  
(2 COLUMN SET - 36,000 LBS. TOTAL CAPACITY)

## MSC-18K-X-472

18,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT  
(4 COLUMN SET - 72,000 LBS. TOTAL CAPACITY)

## MSC-18K-X-6108

18,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT  
(6 COLUMN SET - 108,000 LBS. TOTAL CAPACITY)

- ALI Certified
- Available in two (36K), four (72K), or six (108K) column configurations
- Up to 108,000 lbs. capacity
- 24V DC battery operation with onboard charging system
- Communication cable with retractable cable reels
- U-shaped wiring configuration for quick entry and exit
- Convenient operation from any column
- Independent mechanical locking system
- Optical encoder for continuous column synchronization
- Portability for out of the way storage using pallet jack style base
- Easy to position adjustable forks for different wheel sizes
- Direct drive hydraulic cylinders
- Emergency shut off switch on each column
- Master control panel for individual or paired synchronized operation
- Simple operation via LCD screen and keypad
- LED light with magnetic base (1 per two columns)
- Easily moved for operation in multiple bays
- Optional ALI Certified accessories for expanded service operations
- Batteries not included

## MSC-FORKSPACER FORKLIFT SPACER KIT

• ALI Certified

- 20,000 lbs. max. support capacity (10,000 lbs. per adapter)
- Allows for wheels free service with frame engaging lifting
- Frame engaging "SIDE" lifting for most fork lifts
- Requires two MSC-18K-X column operation
- Spacers fit securely between MSC-18KX lifting arms
- Works with both MSC18K-X and ATDMSC13 Series lifts



MSC-FORKSPACER


## MSC18KX-LTVAK LIGHT VEHICLE ADAPTER KIT

• ALI Certified

- 20,000 lbs. max support (10,000 lbs. per adapter)
- Requires two MSC-18K-X column operation
- Adjustable width pillar supports
- Standard heavy-duty swivel/rubber contact pads
- Used in PAIRS ONLY with two column lift configuration
- Allows for wheels free service with frame engaging lift
- Frame engaging "End" lifting for front and rear of most vehicles
- Works ONLY WITH MSC-18K-X



MSC18KX-LTVAK

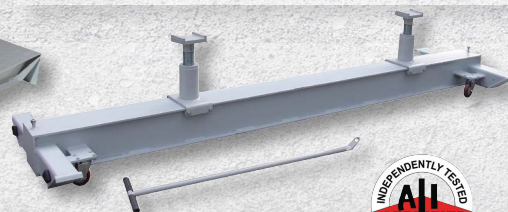


MSC18KX-CRSBM

## MSC18KX-CRSBM CROSS BEAM

• ALI Certified

- 22,000-33,000 max. support capacity
- Allows for wheels free service with frame engaging lift
- Requires two MSC-18KX column operation
- Adjustable width and height pillar supports
- Heavy-duty standard, axel and cradle contact pad adapters (1 pair each)
- Poly casters and tow bar included
- Used individually or in pairs with two or four column lift configurations
- Can also be used with ATDMSC13 Series lifts



Axle Pad



Standard Pad



Cradle Pad

# HIGH PERFORMANCE WHEEL BALANCERS & ACCESSORIES

## ATDWB WHEEL BALANCER

- High performance
- 36mm precision balanced shaft
- Self-calibrating
- 24" wheel
- Manual data entry
- Four cones 1-5/8" to 6-1/16"
- Three ALU modes
- Optional: Light Truck Cone Set (ATDWBTC), Pneumatic Wheel Lift (ATDPWL), Motorcycle Standard Shaft Adapter Kit, (ATDWBMA), Motorcycle Large Shaft Adapter Kit (ATDWBAB)

**MOST POPULAR!**



ATDWB



## ATDWBMA MOTORCYCLE "STANDARD" SHAFT ADAPTER KIT FOR ATDWB

- Wheel clamp for 14-1/2"–32" tire diameter
- Standard 14mm shaft
- Cones up to 1-1/8"



## ATDWBB BASIC WHEEL BALANCER - NO HOOD

- High performance
- Self-calibrating
- 24" wheel
- Manual data entry
- Four cones 1-5/8" to 6-1/16"
- Three ALU modes
- Optional: Light Truck Cone Set (ATDWBTC), Pneumatic Wheel Lift (ATDPWL), Motorcycle Standard Shaft Adapter Kit, (ATDWBMA), Hood Assembly (ATDWBH), Motorcycle Large Shaft Adapter Kit (ATDWBAB)



ATDWBB




ATDWBCB

## ATDWBCB PREMIUM WHEEL BALANCER

- High performance
- Five ALU modes
- Self-calibrating
- 28" wheel
- Manual data entry
- Four cones 1-5/8" to 6-1/4"
- 40mm precision balanced shaft
- Optional: Light Truck Cone Set (ATDWBTC), Motorcycle Standard Shaft Adapter Kit, (ATDWBMA), Pneumatic Wheel Lift (ATDPWL), Lug Centric Universal Adapter (ATDWBAP)


## ATDPWL PNEUMATIC WHEEL LIFT

- For use with all wheel balancers
- 440 lbs. capacity
- Lifts to 17" height
- Air operated
- Use with ATDWB, ATDWBB and ATDWBCB

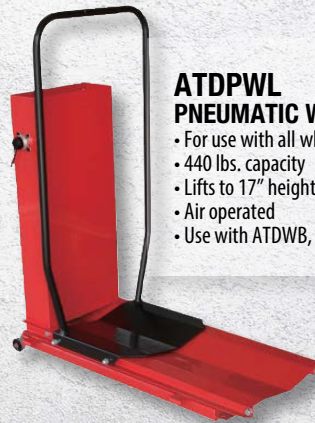

### HIGH PERFORMANCE WHEEL BALANCERS

Wheel Balancer Model	ATDWBB	ATDWB	ATDWBCB
Data Entry	Keypad	Keypad	Keypad
Maximum Wheel Diameter	39"	39"	44"
Rim Width	1-1/2"–20"	1-1/2"–20"	1-1/2"–20"
Rim Diameter	10"–24"	10"–24"	10"–28"
Wheel Weight Capacity	150 lbs.	150 lbs.	150 lbs.
Accuracy	1 gram	1 gram	1 gram
Power	110V, 15A, 1PH	110V, 15A, 1PH	110V, 15A, 1PH
Ship Weight	305 lbs.	335 lbs.	352 lbs.

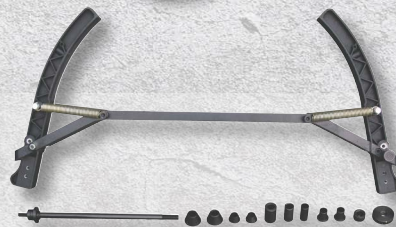

## ATDWBAB MOTORCYCLE "STANDARD" SHAFT ADAPTER KIT FOR ATDWB AND ATDWBB

- Wheel clamp for 14-1/2"–32" tire diameter
- Standard 14mm shaft
- Cones up to 1-1/8"

# HEAVY-DUTY WHEEL BALANCER & ACCESSORIES



HEAVY-DUTY WHEEL BALANCER	
Wheel Balancer Model	ATDWB1
Data Entry	Keypad
Maximum Wheel Diameter	47"
Rim Width	1-1/2"-20"
Rim Diameter	10"-24"
Wheel Weight Capacity	440 lbs.
Accuracy	1 gram
Power	220V, 20A, 1PH
Ship Weight	650 lbs.

## ATDWB1 HEAVY-DUTY WHEEL BALANCER

- 298 lbs. capacity
- Self-calibrating
- Manual data entry
- No hood
- Balances trucks and cars
- 42mm precision balanced shaft
- 24" wheel
- Multiple flanges and cones
- Wheel lift included



## ATDWBAS MOTORCYCLE "LARGE" SHAFT ADAPTER KIT FOR ATDWB AND ATDWB1

- Heavy-duty 19mm shaft for heavy wheels
- Cones up to 1-15/16"



## ATDWBAP LUG CENTRIC UNIVERSAL ADAPTER

- Lug adapter designed for lug centric wheels
- For use with ATDWB1CB or balancers with 40mm shaft



## ATDWBTA36 36MM TRUCK ADAPTER SPACER KIT FOR ATDWB

## ATDWBTA40 40MM TRUCK ADAPTER SPACER KIT FOR ATDWB1CB

The aluminum spacer allows correct mounting of deep dually wheels. The double sided cone allows for maximum cone penetration formounting 3/4 Ton and single axle 1 Ton wheels. In addition the double sided cone goes to an industry standard 6-7/8.

### Both Kits Feature:

- Cone Range (Small Side): 4-7/8" - 6-1/8"
- Cone Range (Large Side): 6" - 6-7/8"
- Aluminum Spacer Offset: 1-3/4"
- Spacer ID/Spacer OD: 7-1/4" / 8-5/8"
- 36mm Spacer Center Hole: **ATDWBTA36**
- 40mm Spacer Center Hole: **ATDWBTA40**



## ATDWBLC 40mm LIGHT TRUCK CONE SET FOR ATDWB1CB

## ATDWBTC 36mm LIGHT TRUCK CONE SET FOR ATDWB AND ATDWB1

### Both Sets Feature:

- Spacer and cone up to 6-1/8"
- For use with 3/4 Ton and some 1 Ton trucks



## ATDWB1B BASIC WHEEL WEIGHT KIT

- For steel wheel application
- Zinc material/galvanized surface
- Includes one complete set of clip-on steel rim weights - (50 ea.) .25 oz. -.75 oz. and (25 ea.) 1 oz.-3 oz.; and one box of adhesive weights - .25 oz., 50 strips, 12 squares per strip

## ATDWB1DX DELUXE WHEEL WEIGHT KIT

- For steel and aluminum alloy wheel applications
- Zinc material/galvanized surface
- Includes one complete set of clip-on steel rim weights - (50 ea.) .25 oz. -.75 oz. and (25 ea.) 1 oz.-3 oz.; one complete set of clip-on aluminum rim weights - (50 ea.) .25 oz. -.75 oz. and (25 ea.) 1 oz.-3 oz.; and one box of adhesive weights - .25 oz., 50 strips, 12 squares per strip



## ATDWBH HOOD ASSEMBLY FOR ATDWB AND ATDWB1B

## ATDWBH1 HOOD ONLY FOR ATDWB1

# COMMERCIAL TIRE CHANGERS

**MOST POPULAR!**



## ATDTCHD COMMERCIAL TIRE CHANGER

- Commercial grade
- Traditional swing arm design
- Four powerful pneumatic clamps
- Foot operated inflation
- Bead seater integrated into clamps
- Tower acts as auxiliary air tank
- Electric table rotation
- Up to 47" tire diameter
- Up to 15" wide wheel
- Pneumatic bead breaker
- Optional: Left Side Mount Assist Arm (ATDLSPA) and Motorcycle/ATV Adapter Kit (ATDTCMA)




## ATDTCHDPA COMMERCIAL TIRE CHANGER AND ASSIST ARM

- ATDTCHD with LEFT side assist arm
- Assist arm simplifies changing low profile and stiff sidewall tires
- Limits damage to expensive wheels
- Adjustable height push down foot
- Simple up/down toggle operation
- Air operated via tire changer air supply
- Makes mounting tires a one-man job
- Optional: Motorcycle/ATV Adapter Kit (ATDTCHDT)

COMMERCIAL TIRE CHANGERS		
Tire Changer Model	ATDTCHD	ATDTCHDPA
Maximum Diameter	47"	47"
Wheel Width	3"-15"	3"-15"
Inside - Rim Clamp Range	15"-28"	15"-28"
Outside - Rim Clamp Range	13"-24"	13"-24"
Power	110V, 15A, 1 PH	110V, 15A, 1 PH
Working Pressure	125 psi	125 psi
Ship Weight	640 lbs.	880 lbs.

# PROFESSIONAL TIRE CHANGERS

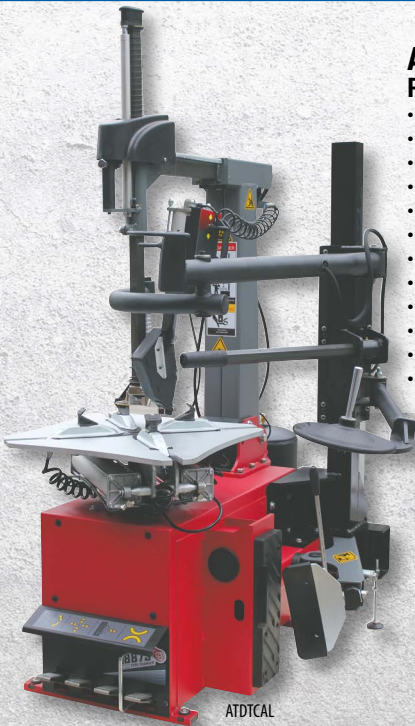

## ATDTCAL PROFESSIONAL TIRE CHANGER

- Professional grade
- Pneumatic tilt back design
- Leverless demount head
- Four pneumatic clamps
- Bead seater integrated into clamps
- Rear mount auxiliary air tank
- Electric table rotation
- Up to 41" tire diameter
- Up to 15" wide wheel
- Pneumatic bead breaker
- Multi-use right side assist arm
- Designed for difficult to mount tires

PROFESSIONAL TIRE CHANGERS		
Tire Changer Model	ATDTCAL	ATDTCHDT
Maximum Diameter	41"	64-1/2"
Wheel Width	3"-15"	31-1/2"
Inside - Rim Clamp Range	13"-26"	14"-26"
Outside - Rim Clamp Range	11"-24"	n/a
Power	110V, 15A, 1 PH	220V, 20A, 1 PH
Working Pressure	125 psi	n/a
Ship Weight	975 lbs.	1,690 lbs.



## ATDTCHDT HEAVY-DUTY TIRE CHANGER

- Heavy-duty commercial grade
- Powerful electric hydraulic operation
- Hydraulic slide moves wheel to clamps
- Four hydraulic clamps
- Articulating head adjusts to wheel height
- Simple joystick operation for demount head and clamp position
- Pedal operation for wheel rotation
- Requires 220V AC, 1 PH

## ECONOMY TIRE CHANGERS



ATDTC

### ATDTC TIRE CHANGER

- Traditional swing arm design
- Four pneumatic clamps
- Foot operated inflation
- Bead seater integrated into clamps
- Tower acts as auxiliary air tank
- Electric table rotation
- Up to 38" tire diameter
- Up to 12" wide wheel
- Pneumatic bead breaker
- Optional: Motorcycle/ATV Adapter Kit (ATDTCMA)



### ATDTCE TIRE CHANGER

- Traditional swing arm design
- Four pneumatic clamps
- Hand held inflation
- Pneumatic bead breaker
- Electric table rotation
- Up to 38" tire diameter
- Up to 11" wide wheel
- No bead seater
- Optional: Tower Mounted Assist Arm (ATDAPAA) and Motorcycle/ATV Adapter Kit (ATDTCMA)



ATDTCE

#### ECONOMY TIRE CHANGERS

Tire Changer Model	ATDTCE	ATDTC
Maximum Diameter	38"	38"
Wheel Width	3"-11"	3"-12"
Inside - Rim Clamp Range	12"-21"	12"-23"
Outside - Rim Clamp Range	10"-18"	10"-20"
Power	110V, 15A, 1PH	110V, 15A, 1PH
Working Pressure	125 psi	125 psi
Ship Weight	460 lbs.	560 lbs.


## POWER SPORT TIRE CHANGER

#### POWER SPORT TIRE CHANGERS

Tire Changer Model	ATDTCM	ATDTCMM
Maximum Wheel Diameter	37"	4"-21"
Maximum Wheel Width	10"	11"
Outside - Rim Clamp Range	6"-24"	3"-12-1/2"
Bead Breaker Force	n/a	n/a
Power Supply	110V, 15A, 1PH	Manual
Working Pressure	125 psi	n/a
Ship Weight	470 lbs.	73 lbs.

### ATDTCM COMMERCIAL POWER SPORT TIRE CHANGER


- Motorcycle and ATV tire changer
- Adjustable clamp seat for expanded range
- Plastic clamps to limit wheel damage
- Swing arm design
- Four pneumatic clamps
- Electric table rotation
- Outside rim clamp range 6"-24"
- Up to 37" tire diameter
- Up to 10" wide wheel
- Pneumatic bead breaker
- Handheld inflation

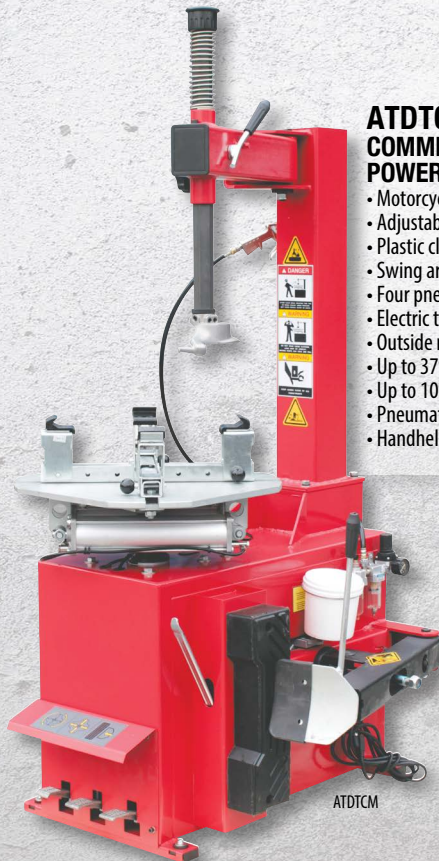

ATDTCM

### ATDTCMM ECONOMICAL MOTORCYCLE/ATV TIRE CHANGER

- Excellent for enthusiasts and hobbyists
- Manual operation
- (3) clamp adjustable system
- Integrated bead breaker
- Inside rim clamp range 3"-12-1/2"
- Wheel diameter range 4"-21"
- Up to 11" wide tire
- Designed for tubed and tubeless tires

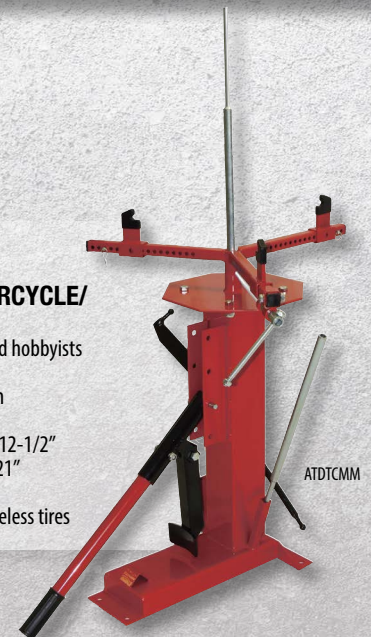

ATDTCMM

## TIRE CHANGER ACCESSORIES



- ATDSLPA  
LEFT SIDE MOUNT  
ASSIST ARM ASSEMBLY**
- Left Side Mount Assist Arm
  - Simplifies mounting of low profile and stiff sidewall tires
  - Limits damage to expensive wheels
  - For use with ATDTCHD

ATDSLPA Left Side Assist Arm shown on ATDTCHD



- ATDTCMA  
TIRE CHANGER MOTORCYCLE/ATV  
ADAPTER KIT**
- Motorcycle/ATV clamp adapters
  - Adapts tire changer clamps to change motorcycle and ATV wheels
  - Change tires without removing brake discs or drive components
  - For use with ATDTCE, ATDTC and ATDTCHD



ATDAPAA Tower Mount Assist Arm shown on ATDTCM

- ATDAPAA  
TOWER MOUNTED  
ASSIST ARM ASSEMBLY**
- Tower Mounted Assist Arm
  - Simplifies mounting of low profile/stiff sidewall tires
  - Limits damage to expensive wheels
  - For use with ATDTCM and ATDTCE



- ATDTS  
PEDESTAL TIRE SPREADER**
- Manual/vertical operation
  - 360° swivel top with dual support rollers
  - Adjustable tire width range 5-11<sup>1</sup>/<sub>16</sub>"–13-3<sup>1</sup>/<sub>4</sub>"
  - 36" convenient pedestal platform height

- ATD9905  
5 GALLON BEAD SEATER**
- ASME certified 5-gallon tank
  - Seats beads on all tires from 4" to 24.5" sizes
  - Operates on standard shop air
  - Built-in carrying handle for portability



- ATD TSA  
PORTABLE TIRE SPREADER**
- Manual/vertical operation
  - Tire width range 5-3<sup>1</sup>/<sub>4</sub>"–10-3<sup>1</sup>/<sub>4</sub>"
  - Large 14" mounting base
  - Designed for use with most wheel clamp tire changers




## PRO SERIES POWER SPORT LIFTS AND ACCESSORIES




ATDM2200

- ATDM2200  
ELECTRIC/HYDRAULIC MOTORCYCLE LIFT BENCH**
- **Exclusive full width retractable ramp system**
  - 2,200 lbs. capacity
  - 47" rise height
  - 31-1<sup>1</sup>/<sub>2</sub>" W x 88.6" L platform size
  - Handheld remote control pendant
  - 110V integrated electric/hydraulic power unit
  - Magnetic lock releases with six locking positions
  - Quick release rear drop down service panel
  - Stabilizer bar for additional support
  - Tubular wheel stops
  - Tie down anchor eye bolts (4 each)
  - Main platform designed for either Cycle Vise (ATDM1V) or Cycle Wheel Chock (ATDM22WC)
  - Options: Cycle Vise (ATDM1V), Cycle Wheel Chock (ATDM22WC), Ramp Extension (ATD2200XR), Front Extension Panel (ATDM22FE), Dolly and Wheel Kit (ATDM22DK), Cycle Jack (ATDM1J)

- ATDM2200AK  
ATV SIDE EXTENSION KIT  
FOR ATDM2200**
- Converts ATDM2200 to ATV lift configuration
  - Increases platform width to 50"
  - This ATV Side Extension Kit is included with the ATDA2200 lift

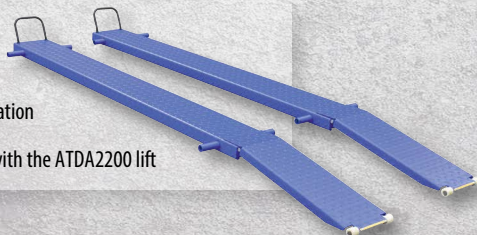

- ATDM2200UK  
UTV SIDE EXTENSION KIT  
FOR ATDM2200**
- Converts ATDM2200 to UTV lift configuration
  - Increases platform width to 65"
  - This UTV Side Extension Kit is included with the ATDU2200 lift





# PRO SERIES POWER SPORTS LIFTS AND ACCESSORIES

## ATDA2200 ELECTRIC/HYDRAULIC ATV LIFT BENCH

- **Exclusive full width center ramp system**
- 2,200 lbs. capacity
- 47" rise height
- 50" W x 88.6" L platform size
- Rear drop down service panel
- Tie down anchor eye bolts (4 each)
- Main platform designed for either Cycle Vise (ATDM1V) or Cycle Wheel Chock (ATDM22WC)
- Options: Cycle Vise (ATDM1V), Cycle Wheel Chock (ATDM22WC), Ramp Extension (ATD2200XR), Front Extension Panel (ATDM22FE), Dolly and Wheel Kit (ATDM22DK), Cycle Jack (ATDM1J)
- Magnetic lock releases with six locking positions
- 110V integrated electric/hydraulic power unit
- Handheld remote control pendant
- Stabilizer bar for additional support
- Wheel stops



## ATDU2200 ELECTRIC/HYDRAULIC UTV LIFT BENCH

- **Exclusive full width retractable ramp system**
- 2,200 lbs. capacity
- 47" rise height
- 65" W x 88.6" L platform size
- Handheld remote control pendant
- Wheel stops
- Main platform designed for either Cycle Vise (ATDM1V) or Cycle Wheel Chock (ATDM22WC)
- Options: Cycle Vise (ATDM1V), Cycle Wheel Chock (ATDM22WC), Ramp Extension (ATD2200XR), Front Extension Panel (ATDM22FE), Dolly and Wheel Kit (ATDM22DK), Cycle Jack (ATDM1J)
- **Exclusive side extensions with center drop panels**
- Smooth, rapid 110V integrated electric/hydraulic operation
- Magnetic lock releases with six locking positions
- Stabilizer bar for additional support
- Rear drop down service panel
- Tie down anchor eye bolts (4 each)




PREMIUM POWER SPORT LIFTS

Lift Model	ATDM2200	ATDA2200	ATDU2200
Capacity	2,200 lbs.	2,200 lbs.	2,200 lbs.
Minimum Height	7"	7"	7"
Maximum Lifting Height(s)	47-1/4"	47-1/4"	47-1/4"
Overall Length with Ramp	116-1/2"	116-1/2"	116-1/2"
Overall Width	58"	58"	65"
Platform Size	88-5/8" x 31-1/2"	88-5/8" x 50"	88-5/8" x 65"
Lifting Time/Lowering Time	30S/30S	30S/30S	30S/30S
Power	110V, 60Hz, 1 PH, 18A	110V, 60Hz, 1 PH, 18A	110V, 60Hz, 1 PH, 18A
Ship Weight	704 lbs.	880 lbs.	970 lbs.



## ATDM22FE FRONT EXTENSION PANEL FOR ATD2200 SERIES LIFTS

- Extends ATD2200 Series lift platforms by 21.6" (or to 110.25")



## ATD2200XR RAMP EXTENSION

- Reduces ramp angle for low profile motorcycles
- 35" L x 16" W ramp size
- Designed to work with ATD2200 Series lifts



## ATDM2200TK TRIKE SIDE AND FRONT EXTENSION KIT FOR ATDM2200

- Converts ATDM2200 to trike lift configuration
- Increases table width to 62.2"
- Increases platform length to 110.25"




## ATDM22DK DOLLY AND WHEEL KIT

- Includes nose dolly and wheel kit
- Makes ATD2200 Series lifts portable



# PRO SERIES POWER SPORT UTV FRAME LIFT

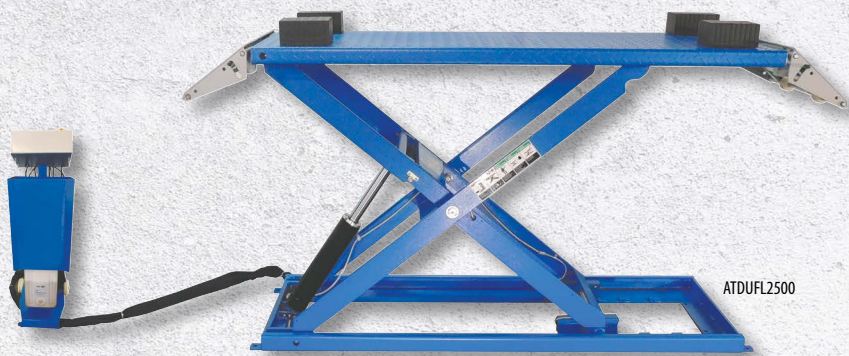

ATDUFL2500

## ATDUFL2500 ELECTRIC/HYDRAULIC UTV FRAME LIFT

- Exclusive "wheels free" design for the largest UTVs to the smallest ATVs
- 2,500 lbs. capacity
- 43" rise height (49" with rubber lift pads)
- 24" W x 88.9" L platform size
- 4-3/4" minimum height
- Smooth, rapid 110V electric/hydraulic operation
- Three locking positions
- Load bearing hinged ramps
- Portable or mounted pedestal controls
- Rubber contact lift pads - 4-3/4" x 6-1/2" (4 each)
- Optional UTV/ATV Wheel Stand Kit (ATDWHSTDKIT)



## ATDWHLSTDKIT UTV/ATV WHEEL STAND KIT FOR ATDUFL2500 (SET OF 4)

- Adjustable height 24.4" - 42"
- Five locking height positions
- Includes four wheel stands
- All hardware included
- Provides additional undercarriage service ability
- Supports largest UTV and ATV power sport vehicles
- Exclusive spring casters for easy lifting and mobility
- 625 lbs. capacity per stand (2,500 lbs. total capacity)

PREMIUM POWER SPORT LIFT	
Lift Model	ATDUFL2500
Capacity	2,500 lbs.
Minimum Height	4-3/4"
Maximum Lifting Height(s)	43"
Overall Length with Ramp	88-7/8"
Overall Width	24"
Platform Size	67" x 24"
Lifting Time/Lowering Time	25S/25S
Power	110V, 60Hz, 1 PH, 18A
Ship Weight	740 lbs.

# POWER SPORT LIFTS AND ACCESSORIES



ATDM15HR

## ATDM15HR HIGH-RISE MOTORCYCLE LIFT

- 1,500 lbs. capacity
- 38-1/2" lifting height
- 88-1/2" L x 31-1/2" W table
- 88-1/2" L x 50" W table with side extensions
- Air/hydraulic operation
- Rear drop out panel and service support poles
- Cycle Vise and Side Extensions included

POWER SPORT LIFTS		
Lift Model	ATDM1	ATDM15HR
Capacity	1,000 lbs.	1,500 lbs.
Minimum Height	7"	6-3/4"
Max. Lifting Height	30"	38-1/2"
Overall Length with Ramp	108"	109-1/2"
Overall Width	47"	50"
Platform Size (L x W)	84" x 24"	88-1/2" x 50"
Power	Air (90-100 psi)	Air/Hydraulic (90-100 psi)
Ship Weight	395 lbs.	765 lbs.



ATDM1 shown with optional vise (ATDM1V)


## ATDM1 PNEUMATIC MOTORCYCLE LIFT

- 1,000 lbs. capacity
- 84" L x 24" W table
- Rear drop out panel
- Optional: Vise (ATDM1V), Jack (ATDM1J), Front Extension (ATDM1FE) and Side Extension (ATDM1SE)
- 30" lift height
- Air powered operation

## POWER SPORT LIFT ACCESSORIES

### ATDM1J CYCLE JACK

- 1,100 lbs. capacity
- Includes (2 each) adjustable frame cradles
- Platform Size 17-23/32" x 5-29/32"
- Min. Height: 3-3/4"
- Max. Height: 15-3/4"

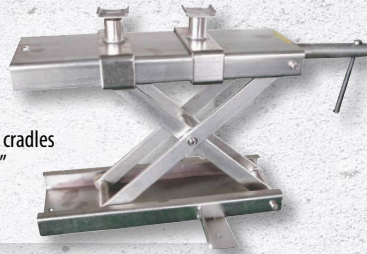

### ATDM22WC SELF-LOCKING CYCLE CHOCK

- Mounts to ATD2200 Series platform or front extension
- Adjustable self-locking operation
- Includes narrow tire adapters
- Securely holds cycle in upright/fix position
- Convenient one person operation
- All hardware included




### ATDM1V CYCLE VISE

- Mounts to ATD2200 Series platform or front extension
- Securely holds cycle in upright/fix position
- Clamp design to fit most cycle front wheels
- Rubber pads for cycle wheel protection
- All hardware included




### ATDM1FE FRONT EXTENSION PANEL FOR ATDM1

- Increases platform length to 97"
- Durable powder coat finish
- All hardware included
- Pre-drilled mounting holes for ATDM1V Cycle Vise

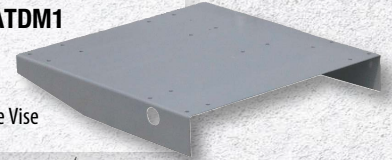

### ATDM1SE SIDE EXTENSION KIT FOR ATDM1

- Increases platform width to 48"
- Durable powder coat finish
- All hardware included

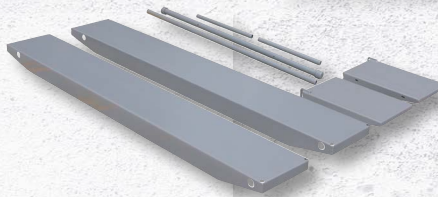

### ATDDMS1 DELUXE CYCLE STAND

- 1,000 lbs. capacity
- Hand operated stand
- Raises front or rear wheel for service or detailing
- Adjustable height with 5 height options
- Heavy-duty construction with 14 Ga. x 1-1/2" round tubing
- 3/16" thick protective vinyl tubing prevents scratching
- Locate handle assembly to either right or left side
- Durable powder coat finish



### ATDTCWB POWER SPORT "COMBO" TIRE CHANGER AND WHEEL BALANCER

- Space saving combo tire changer and wheel balancer
- Specifically designed for motorcycle and power sport wheels
- Semi-automatic tire changer swing arm design
- Adjustable turntable clamps
- Outside clamping for motorcycle wheels
- Smaller dismount head for small tires
- Protective bead breaker shovel cover
- Regulator, oiler and water trap included
- Hand spin balancer operation
- Balancer self-calibration and self-diagnosis
- Five balancing modes
- High precision balancer main shaft
- Three motorcycle shafts included for various hub diameters
- Accessory components for automotive wheel balancing

*Unique space saving design!*



ATDTCWB

## POWER SPORT WHEEL SERVICE



### ATDTCWB POWER SPORT COMBO

#### TIRE CHANGER

Maximum Wheel Diameter	39"
Maximum Wheel Width	10"
Outside - Rim Clamp Range	6"-24"
Power Supply	110V, 15A, 1PH
Bead Breaker Force	n/a
Working Pressure	125 psi

#### WHEEL BALANCER

Data Entry	Keypad
Max. Tire Diameter (Motorcycle)	31"
Max. Tire Diameter (Truck/Auto)	39"
Rim Width	1-1/2"-20"
Rim Diameter	10"-24"
Wheel Weight Capacity	143 lbs.
Accuracy	1 gram
Power	Manual (Hand Spin)
Ship Weight	975 lbs.

# POWER SPORT WHEEL SERVICE

## ATDWBM MOTORCYCLE AND AUTO WHEEL BALANCER

- High performance balancer
- Includes Motorcycle Adapter Kit
- 36mm precision balanced shaft
- Self-calibrating
- Quick spin cycle
- Four balancing modes
- Static or dynamic balancing
- 24" max. rim diameter
- 39" max. wheel diameter
- Easy manual data entry
- Quick nut
- No hood
- Four cones 1-5/8"–6-1/16"
- Weight storage tray
- Three ALU modes
- Motorcycle Adapter Kit includes:  
Motorcycle wheel clamp (14-1/2"–32" tire diameter);  
14mm shaft and cone sets up to 1-5/16"

MOTORCYCLE & AUTO WHEEL BALANCER	
Wheel Balancer Model	ATDWBM
Data Entry	Keypad
Max. Tire Diameter - Motorcycle	14-1/2"–32"
Max. Tire Diameter - Truck/Auto	39"
Rim Width	1-1/2"–20"
Rim Diameter	10–24"
Wheel Weight Capacity	150 lbs.
Accuracy	1 gram
Power	110V, 15A, 1PH
Ship Weight	305 lbs.



*Includes Pneumatic Assist Arm for ease of changing Low Profile or Stiff Sidewall Tires!*



POWER SPORT TIRE CHANGER	
Tire Changer Model	ATDTCMATV
Maximum Wheel Diameter	37"
Maximum Wheel Width	10"
Outside - Rim Clamp Range	6"–24"
Bead Breaker Force	5,500 lbs.
Power Supply	110V, 15A, 1PH
Working Pressure	125 psi
Ship Weight	470 lbs.

## ATDTCMATV POWER SPORT TIRE CHANGER

- Motorcycle, ATV and UTV tire changer
- 6"–24" outside rim clamp range
- Up to 37" tire diameter
- Up to 10" wide wheel
- Swing arm design
- Four adjustable clamps for full clamping range
- Powerful clamping with double acting pneumatic cylinders
- Plastic clamps protect wheels from scratching
- Powerful pneumatic bead breaker
- Electric table rotation
- Easy to use handheld inflation gun
- Regulator, oiler and water trap included



## ATDTCMAA POWER SPORT TIRE CHANGER AND ASSIST ARM

- Motorcycle, ATV and UTV tire changer
- ATDTCMATV with assist arm
- Tower mounted assist arm
- Simplifies mounting of low profile/ and stiff sidewall tires
- Limits damage to expensive wheels
- Adjustable height push down foot
- Simple up/down toggle operation
- Air operated via tire changer air supply
- Quick and easy installation
- Makes mounting tires a one-man job

POWER SPORT TIRE CHANGER WITH ASSIST ARM	
Tire Changer Model	ATDTCMAA
Max. Wheel Diameter - Motorcycle	37"
Maximum Wheel Width	10"
Outside - Rim Clamp Range	6"–24"
Power Supply	110V, 15A, 1PH
Bead Breaker Force	5,500 lbs.
Working Pressure	125 psi
Ship Weight	530 lbs.



# CAR ROTISSERIE & ACCESSORIES



## ATDCR3 CAR ROTISSERIE

- Durable powder coat finish
- Heavy-duty balancing system
- 360° rotation with 12 locking positions
- 3,000 lbs. capacity car rotisserie
- Heavy-duty tubular steel construction
- (6) phenolic resin "lockable" casters
- Telescoping bar allows adjustment up to 21' 6"


- 16" mounting arms used for direct mounting to floor or optional accessory mounting
- Adjustable height 17-3/4"–45-1/4" from mounting arms to floor
- Dual 6,000 lbs. capacity jacks adjust working height

CAR ROTISSERIE	
Model Number	ATDCR3
Capacity	3,000 lbs.
Width Overall	58-7/8"
Height Overall	77-1/8"
Length Overall	258-1/4"
Lifting Height	17-3/4"–45-1/4"
Ship Weight	410 lbs.




## ATDCR3ATWK ALL TERRAIN WHEEL KIT

- Easily transport ATDCR3 over rough surfaces
- 2,000 lbs. capacity
- Quick, simple mounting
- Durable "Flat-Free" rubber wheels
- (2) swivel and (2) rigid casters
- Heavy-duty construction
- Powder coat finish



## ATDCR3VB VALENCE BRACKETS

- Universal design
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3



## ATDCR3SB LEAF SPRING BRACKETS

- Universal design
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3



## ATDCR3MSB MOPAR E-BODY LEAF SPRING BRACKETS

- Mounts to rear leaf spring perch or rear bumper mount
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3

## ATDCR3UB UNI-BODY BRACKETS

- Universal design
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3



## ATDCR3DB UNIVERSAL DOOR BARS

- Universal design
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3



## ATDCR3MFB MOPAR FRONT BRACKETS

- Mounts to bumper bracket location
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3




# BODY CARTS

BODY CARTS		
Model Number	ATDBC3	ATDBC3A
Capacity	3,000 lbs.	3,000 lbs.
Adjustable Width	38"–65"	Up to 60"
Adjustable Height	22"	28"–38"
Adjustable Length	38"–65"	Up to 132"
Ship Weight	188 lbs.	289 lbs.



## ATDBC3 BODY CART - STANDARD

- 3,000 lbs. capacity
- Heavy-duty tubular steel construction
- Universal design
- Adjustable length and width
- 8" x 2" heavy-duty poly casters (2 locking)
- Durable powder coat finish
- Includes (4 each) fixed height straddle pads

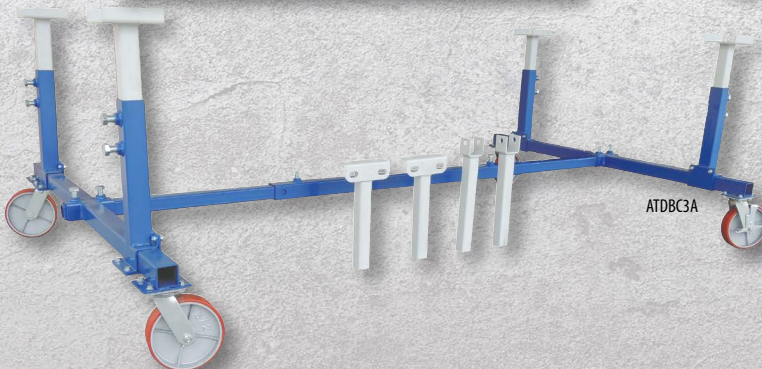

## ATDBC3A BODY CART - ADJUSTABLE


- 3,000 lbs. capacity
- Heavy-duty tubular steel construction
- Universal design
- Adjustable length, width and adapter height
- 8" x 2" heavy-duty poly casters (2 locking)
- Durable powder coat finish
- Includes: (4) straddle pads, (2) bolt down adapters and (2) leaf spring adapters

# FRAME RACK MACHINES



**ATDFR7718S**  
STEEL PLATE DECK - 18' LONG  
FRAME RACK MACHINE

**ATDFR7720S**  
STEEL PLATE DECK - 20' LONG  
FRAME RACK MACHINE

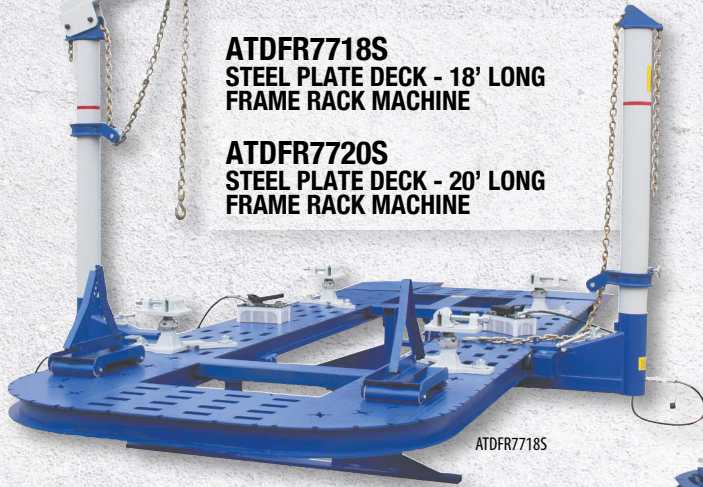

ATDFR7718S

**ATDFR7718T**  
TUBULAR DECK - 18' LONG  
FRAME RACK MACHINE

**ATDFR7720T**  
TUBULAR DECK - 20' LONG  
FRAME RACK MACHINE




ATDFR7720T

## FRAME RACK MACHINES WITH HEAVY-DUTY TUBULAR DECK OR STEEL PLATE DECK

- 7,700 lbs. capacity with Tubular Deck - 18 ft. deck length (ATDFR7718T)
- 7,700 lbs. capacity with Tubular Deck - 20 ft. deck length (ATDFR7720T)
- 7,700 lbs. capacity with Steel Plate Deck - 18 ft. deck length (ATDFR7718S)
- 7,700 lbs. capacity with Steel Plate Deck - 20 ft. deck length (ATDFR7720S)
- Durable, heavy-duty tubular or steel plate deck construction
- Universal anchoring system with adjustable height pinch weld clamps
- (2 each) high quality air/hydraulic pumps with pressure gauges
- (2 each) 10 Ton round pull towers with telescoping tower heads
- Hydraulic tilt deck operation with drive-on ramps
- Clear floor, 360° pulling capability
- Adjustable tower collars
- Durable powder coat finish

- Designed to accommodate both full frame and uni-body vehicles
- (1 pair) universal wheel stands and dead vehicle dollies included
- (2 each) high quality air/hydraulic pumps with pressure gauges
- Quick disconnect hydraulic fitting and hose connections
- (1 each) overhead boom/pull tower extension
- Multiple tie down hole locations
- (2 each) pulling chains with hooks

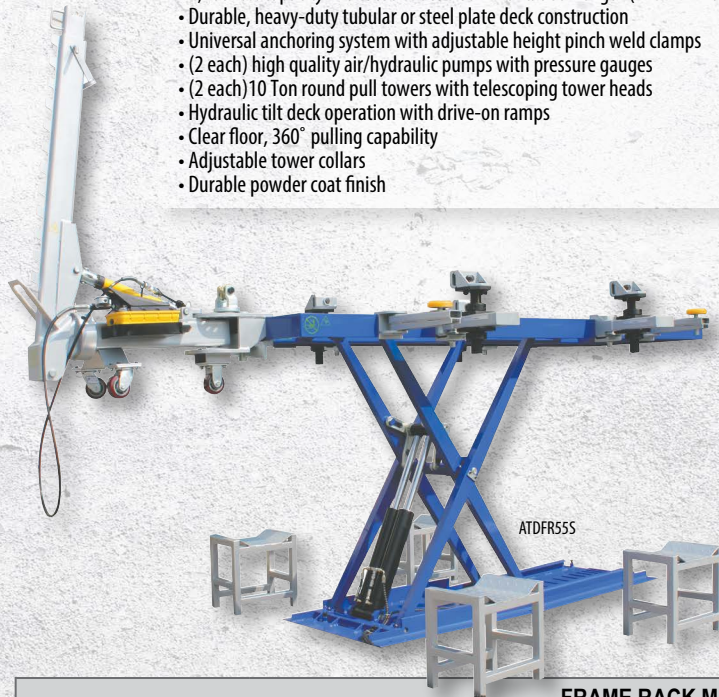

ATDFR555

## ATDFR555 SCISSOR FRAME RACK MACHINE

- 5,500 lbs. lift capacity
- Unique, compact versatile design
- Scissor style lift operation with twin hydraulic cylinders
- Handles both full frame and uni-body vehicles
- Easy vehicle positioning with swing arms and adjustable lift pads
- Universal anchoring system with adjustable height pinch weld clamps
- 10 Ton adjustable height "slotted" pull tower with down pull roller
- 10 ft. pulling chain with hook
- Multi-angle 360° pulling
- Quick disconnect hydraulic fittings and hose connections
- High quality air/hydraulic pump with pressure gauge
- Portable console cabinet for lift operation with pneumatic lock release
- Remote handheld pendant for lift operation
- Four universal wheel stands included
- Durable powder coat finish

### FRAME RACK MACHINES

Frame Rack Model	ATDFR7718S	ATDFR7720S	ATDFR7718T	ATDFR7720T	ATDFR555
Deck Design	Steel Plate	Steel Plate	Tubular	Tubular	Scissor Lift
Deck Length	18 ft.	20 ft.	18 ft.	20 ft.	14 ft. 5-1/4 in.
Deck Width	82.6"	82.6"	82.6"	82.6"	37"
Deck Height	19.7"	19.7"	19.7"	19.7"	4.75"-63"
Pull Force per Tower	10 Ton	10 Ton	10 Ton	10 Ton	10 Ton
Hydraulic Pressure	10,000 psi	10,000 psi	10,000 psi	10,000 psi	10,000 psi
Required Air Pressure	100-120 psi	100-120 psi	100-120 psi	100-120 psi	100-120 psi
Lifting Capacity	7,700 lbs.	7,700 lbs.	7,700 lbs.	7,700 lbs.	5,500 lbs.
Power	n/a	n/a	n/a	n/a	220V AC, 20A, 1 PH
Ship Weight	5,071 lbs.	5,953 lbs.	4,189 lbs.	5,300 lbs.	3,105 lbs.
Options	Tool Board Kit (ATDFR77TCK), Pro Measure Kit (ATDFRMK), Electric Winch (ATDFREW), Air Bag Jack (ATDFRABJ)				Tool Board Kit (ATDFR55TCK), Pro Measure Kit (ATDFRMK), Electric Winch (ATDFREW), Air Bag Jack (ATDFRABJ)

# FRAME RACK MACHINE ACCESSORIES



## ATDFR77TCK 25 PC. FRAME RACK TOOL BOARD AND CLAMP KIT

Frame Rack Tool Kits include all of the necessary clamps, fixtures and chain to grip, pull and hold during a typical straightening procedure. Designed to work with a wide range of full frame or uni-body type vehicles. The portable tool board is constructed with heavy gauge metal and standard with storage shelf, hooks, casters and durable powder coat finish. Adapters, clamps, cables and chains are heavy-duty, high quality construction with durable powder coat or zinc plated finish.



## ATDFR55TCK 20 PC. FRAME RACK TOOL BOARD AND CLAMP KIT

## 5812A HYDRAULIC FOOT PUMP

- Usable Oil Capacity: 98 cu. in.
- Pressure Rating: 10,000 psi
- Air Pressure Rating: 90–145 psi
- Output Flow Rate - No Load : 49.5 cu. in./min.
- Output Flow Rate - @ Load: 7.6 cu. in./min.
- Air Input Port: 1/4"-18 NPTF
- Oil Output Port : 3/8"-18 NPTF



## ATDFREW ELECTRIC WINCH

- 3,500 lbs. capacity
- 30 ft. pull cable length
- 10 ft. DC power cord length
- 12V DC power operation
- Hook Size: 3/4" opening x 4" L
- Hand crank
- Heavy-duty marine grade durable construction
- Handheld remote control switch with 10 ft. cord
- Base "anchor" bracket for frame rack deck mounting



## ATDFRMK FRAME RACK PRO MEASURE KIT

- Small, light and easy to operate
- Time saving, one-person operation
- Laser carved, easy to read scale
- Instructional and data disks included
- Vehicle measurement data
- Magnetic probe for automatic centering
- Measures from 9.8"–116.3" (250mm–2955mm)
- Bubble level integrated into head for accurate measuring
- Precision triple telescoping aluminum scale
- (16 each) measuring probe tips from 8mm–28mm
- Small, medium and large cone tips with holders
- Lightweight durable aluminum case with keyed lock included



## ATDFRABJ AIR BAG JACK

- 4,400 lbs. capacity
- Lifts most passenger vehicles and light trucks
- Low profile design
- Simple controls
- Pneumatic operation (100 psi)
- Internal telescoping stabilization sleeve
- Pressure relief valve to eliminate over inflation



ATDPSMTD

## ATDPSMTD PAINT MIXING TABLE & DISPENSER

- Heavy-duty stainless steel construction
- Dual spray gun holder with catch basin
- (2) tape and paper masking dispensers
- Portable design with 3" poly casters
- Convenient 32" table height
- Large 37" x 22" table top area
- Minor assembly required

# PAINT MIXING TABLES

PAINT MIXING TABLE & DISPENSER	
<b>Model Number</b>	ATDPSMTD
<b>Overall Size</b>	21.75" L X 46.5" W X 32" H
<b>Work Top Area</b>	21.75" L X 37.37" W
<b>Catch Basin Size</b>	19.25" L X 18.5" W X 1.25" H
<b>Max. Dispenser Sizes</b>	20" W and 34" W

PAINT MIXING CABINET & TABLE	
<b>Model Number</b>	ATDPSMCT
<b>Overall Size</b>	20.5" L x 47.25" W x 35" H
<b>Work Top Area</b>	19.75" L x 45.75" W
<b>Storage Cabinet Size</b>	19" L x 31" W x 27.5" H
<b>Storage Drawer Size</b>	(2) 14" L x 14.5" W x 5.75" H



ATDPSMCT

## ATDPSMCT PAINT MIXING CABINET & TABLE

- Heavy-duty stainless-steel construction
- Large lockable storage cabinet
- (2) side drawers and storage bins
- Convenient 34" table height
- Large 46" x 20" table top area
- 1.25" retaining fence on three sides
- Ships fully assembled



# CROSS FLOW DRAFT PAINT SPRAY BOOTH

## ATDPB23CF3P (3 PHASE) ATDPB23CF1P (1 PHASE) CROSS FLOW DRAFT - PAINT SPRAY BOOTH

- Meets or exceeds all applicable OSHA and NFPA 33 Regulations
- Optimal "Cross Draft" airflow with CFM 9,500 @ .5 static pressure
- Inside Dimensions: 22' 6" L x 13' W x 8' 6" H
- Manometer, solenoid valve, hardware and sealant included
- UL Listed Dayton 24" Tube-Axial exhaust fan with spark-resistant fan blades
- NEMA rated 3 Hp, 3PH, 230V/460V AC, 60Hz motor standard
- Premium AFC intake and exhaust filters
- (6 each) LDPI Industrial Lighting T-8, (4 lamp) "vertical" light fixtures
- (24 each) GE T-8 fluorescent lamps - 32W, 5000K, 48" length
- Double entry doors with shutoff switches
- Personnel door with viewing window and shutoff switch
- Deluxe control panel included
- Easy to install, operate and maintain

DURABLE BRIGHT WHITE  
POWDER-COAT FINISH  
INSIDE AND OUT

HEAVY-DUTY,  
PRECISION PUNCHED  
18 GA. PANELS

"TRUE DAYLIGHT" T8,  
48" FLUORESCENT LAMPS,  
32W, 5000K COLOR




LARGE "FILTERED" 8 FT.  
DOUBLE ENTRY DOORS

OPTIMAL LIGHTING  
COVERAGE WITH  
"TILT PANEL" DESIGN

CONVENIENT  
5/16" BOLT AND  
LOCK NUT ASSEMBLY


VIEWING WINDOW  
FOR PERSONNEL DOOR

PERSONNEL DOOR  
LOCATION OPTIONS

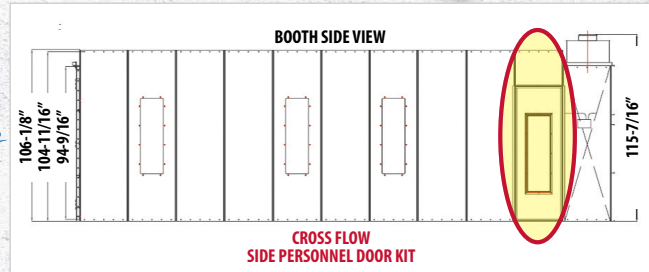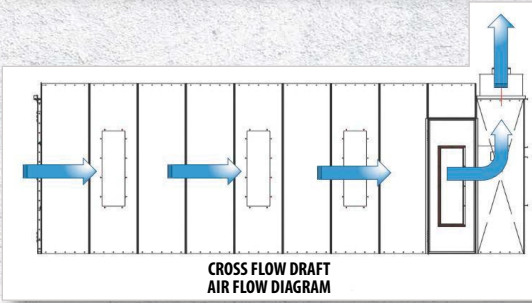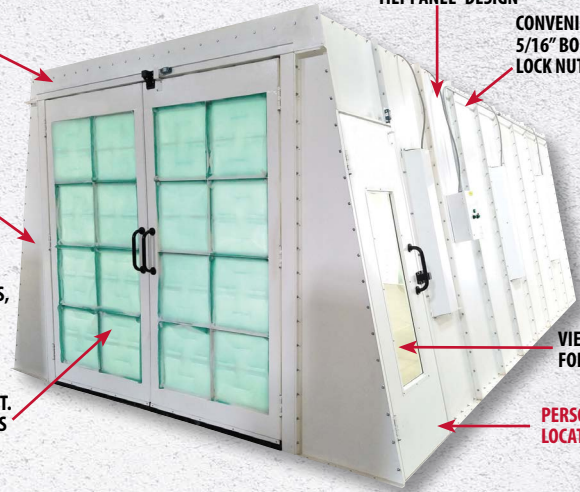


## ATDCFPSDK CROSS FLOW SIDE PERSONNEL DOOR KIT

- White powder coated finish (inside and out)
- Viewing window included
- Door activated shutoff switch
- 5/16" bolt and nut assembly
- Personnel Side Door Size: 30" W x 84" H
- Heavy-duty dual skin construction
- High quality hinges, pressure latch and handles
- Assembly hardware included

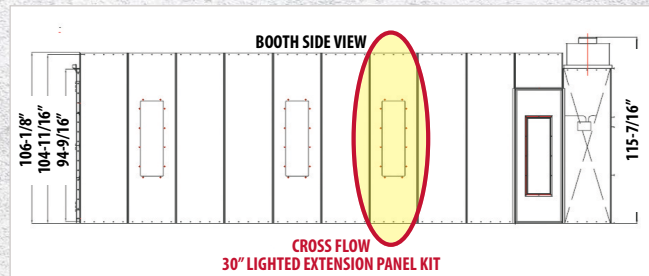

## ATDCF30LE CROSS FLOW 30" LIGHTED EXTENSION PANEL KIT

- 30" lighted, rear booth extension
- 5/16" bolt and nut assembly
- (8 ea.) GE T8 fluorescent lamps - 32W, 5000K, 4 ft. length
- (2 ea.) LDPI Industrial Lighting T8 "Vertical" light fixtures, 4 lamp
- Assembly hardware included
- White powder coated finish (inside and out)
- HD precision punched 18 Ga. panel construction

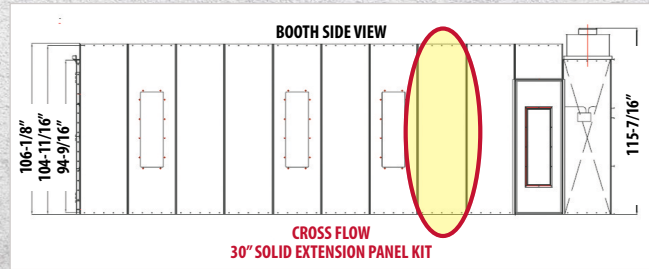


## ATDCF30SE CROSS FLOW 30" SOLID EXTENSION PANEL KIT

- 30" solid, rear booth extension
- 5/16" bolt and nut assembly
- Assembly hardware included
- White powder coated finish (inside and out)
- Precision punched 18 Ga. panel construction

## CROSS FLOW DRAFT PAINT SPRAY BOOTH

Model Number	ATDPB23CF3P / ATDPB23CF1P
Inside Dimensions	22'-6" L x 13' W x 8'-6" H
Outside Dimensions	25'-4" L x 13'-4" W x 8'-10" H
Fan / Motor	24" Tube-Axial Fan 3 Hp, 3PH, 230/460V AC, 60Hz, Non-Spark, NEMA Rated
CFM	9,500 @ .5 Static Pressure
Lighting	(6 ea.) T-8 (4 bulb) Light Fixtures
Options	Single Phase Electrical Configuration (ATDPB23CF1P); 8 ft. Exhaust Extension Kit, 25" Dia. (ATDPB25DK); Side Personnel Door Kit (ATDCF-PSDK); 30" Lighted Extension Panel Kit (ATDCF30LE); 30" Solid Extension Panel Kit (ATDCF30SE); Electric Booth Heater - 3 Phase (ATDPB-H30K3P); Electric Booth Heater - 1 Phase (ATDPBH30K1P)

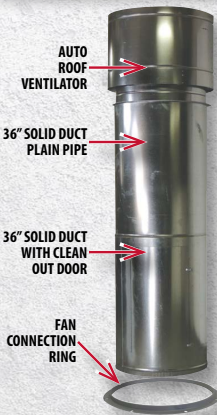

## ATDPB25DK 25" X 8 FT. CROSS FLOW AND SIDE DOWN DRAFT EXHAUST DUCT KIT

- Provides duct work to properly exhaust Cross Flow and Side Down Draft Paint Spray Booths
- High quality 20 Ga. galvanized hammer seamed "plain pipe" ducting kit with 8 ft. standard height
- One duct end corrugated for easy assembly
- (1) Fan Connection Ring
- (1) 36" H x 25" Dia. Solid Duct with 32" H x 17" W clean out door
- (1) 36" H x 25" Dia. Solid "Center" Duct
- (1) 24" H x 25" Dia. Auto Roof Ventilator (ARV) protects from rain and snow
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section
- (2) 25" duct kits required for Side Down Draft models



## ATDCFLED CROSS FLOW LED LIGHTING UPGRADE KIT

- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000K CCT
- UL/ETL listed 120-277V AC (50/60Hz) electrical
- Direct replacement for standard fluorescent light fixtures



# SEMI-DOWN DRAFT PAINT SPRAY BOOTH

"OPTIONAL" PLENUM KIT FOR PRESSURIZED HEATED BOOTH CONFIGURATION

"TRUE DAYLIGHT" T8, 48" FLUORESCENT LAMPS, 32W, 5000K COLOR

PERSONNEL DOOR LOCATION OPTIONS

TRI-FOLD ENTRY DOORS WITH VIEWING WINDOWS



ATDPB26SDD Paint Spray Booth shown with optional ATDPBC26SDD Canopy Plenum Kit

OPTIMAL LIGHTING COVERAGE WITH "HIP PANEL" DESIGN



DURABLE BRIGHT WHITE POWDER-COAT FINISH INSIDE AND OUT

HEAVY-DUTY, PRECISION PUNCHED 18 GA. PANELS

CONVENIENT 5/16" BOLT AND LOCK NUT ASSEMBLY

## ATDPB26SDD3P (3 PHASE) ATDPB26SDD1P (1 PHASE) SEMI-DOWN DRAFT - PAINT SPRAY BOOTH


- Optimal airflow with CFM 12,200 @ .5 static pressure
- Inside Dimensions: 26" L x 14" W x 9' 3" H
- Deluxe control panel included
- Manometer, solenoid valve, hardware and sealant included
- UL Listed Dayton 30" Tube-Axial exhaust fan with spark-resistant fan blades
- Nema rated 3 Hp, 3PH, 230V/460V AC, 60 Hz motor standard
- Premium AFC intake and exhaust filters
- (10 each) LDPI Industrial Lighting T-8, (4 bulb) "vertical" light fixtures
- (40 each) GE T-8 fluorescent lamps - 32W, 5000K, 48" length
- Tri-fold entry doors with viewing windows and shut off switch
- Personnel door with viewing window and shut off switch
- Meets NFPA 33 Standards

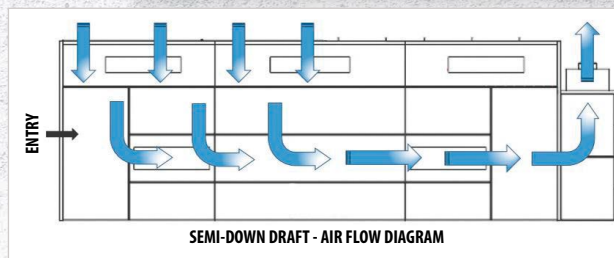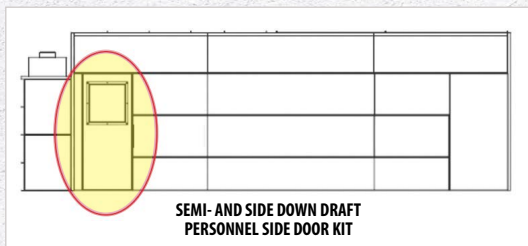

## ATDSDDSDK

### SEMI- AND SIDE DOWN DRAFT PERSONNEL SIDE DOOR KIT

- For ATDPB26SDD3P, ATDPB26SDD1P, ATDPB26DD3P and ATDPB26DD1P booths
- Door activated shut off switch
- Viewing window included
- 5/16" nut and bolt installation
- Heavy-duty dual skin construction
- Bright white powder coat door finish inside and outside
- High quality hinges, pressure latch and handles
- Personnel Side Door Size: 36" W x 84" H
- Assembly hardware included

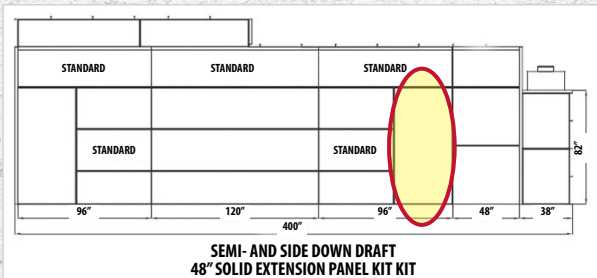

## ATDSDD48EP

### SEMI- AND SIDE DOWN 48" SOLID EXTENSION PANEL KIT

- 48" solid rear booth extension
- 5/16" nut and bolt installation
- Assembly hardware included
- White powder coat panel finish (inside and outside)
- Precision punched 18 Ga. panel construction



## ATDPBC26SDD

### SEMI-DOWN DRAFT PLENUM KIT (shown on booth above)

- Required when using direct "gas fired" air make up (heater) with paint booth
- Can be installed to new or existing semi-down draft paint booths
- Heavy-duty precision punched 18 Ga. panel construction
- Bright white powder coat panel finish inside and out
- Convenient 5/16" bolt and nut assembly
- Assembly hardware and sealant included




## ATDSDDLED SIDE- AND SEMI-DOWN LED LIGHTING UPGRADE KIT

- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000K CCT
- UL/ETL listed 120-277V AC (50/60Hz) electrical
- Direct replacement for standard fluorescent light fixtures

## SEMI-DOWN DRAFT PAINT SPRAY BOOTH


Model Number	ATDPB26SDD3P / ATDPB26SDD1P
Inside Dimensions	26" L x 14" W x 9'-3" H
Outside Dimensions	29'-4" L x 14'-4" W x 9'-7" H
Fan / Motor	30" Tube-Axial Fan 3 Hp, 3PH, 230/460V AC, 60Hz, Non-Spark, NEMA Rated
CFM	12,200 @ .5 Static Pressure
Lighting	(10 ea.) T-8 (4 bulb) Light Fixtures
Options	Single Phase Electrical Configuration (ATDPB26SDD1P); Canopy/Plenum (required for Booth Heater) (ATDPBC26SDD); 8 ft. Exhaust Extension Kit, 25" Dia. (ATDPB25DK); Side Personnel Door Kit (ATDSDDSDK); 48" Solid Extension Panel Kit (ATDSDD48EP); Gas Fired Booth Heater - 3 Phase (Plenum required) (ATDPBH3P); Gas Fired Booth Heater - 1 Phase (Plenum required) (ATDPBH1P); Electric Booth Heater - 3 Phase (ATDPBH30K3P); Electric Booth Heater - 1 Phase (ATDPBH30K1P)

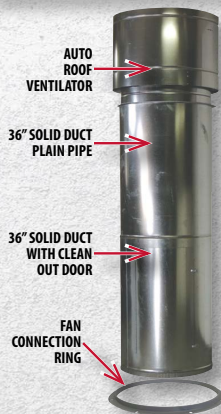



## ATDPB31DK 31" X 8 FT. SEMI-DOWN DRAFT EXHAUST DUCT KIT

- Provides duct work to properly exhaust Cross Flow and Side Down Draft Paint Spray Booths
- High quality 20 Ga. galvanized hammer seamed "plain pipe" ducting kit with 8 ft. standard height
- One duct end corrugated for easy assembly
- (1) Fan Connection Ring
- (1) 36" H x 31" Dia. Solid Duct with 32" H x 17" W clean out door
- (1) 36" H x 31" Dia. Solid "Center" Duct
- (1) 24" H x 31" Dia. Auto Roof Ventilator (ARV) protects from rain and snow
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section

# SIDE DOWN DRAFT PAINT SPRAY BOOTH

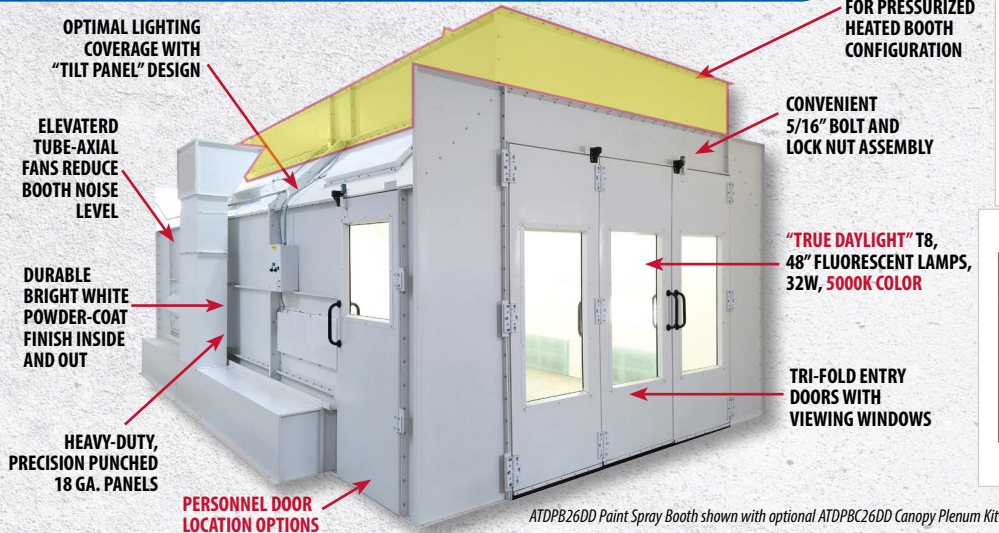

"OPTIONAL" PLENUM KIT FOR PRESSURIZED HEATED BOOTH CONFIGURATION

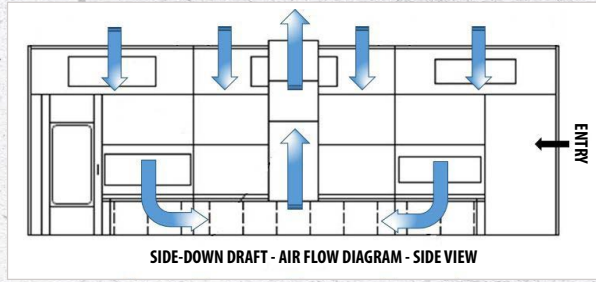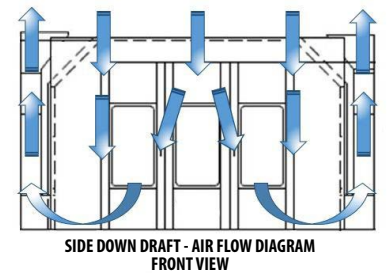

ATDPB26DD Paint Spray Booth shown with optional ATDPBC26DD Canopy Plenum Kit


## ATDPB26DD3P (3 PHASE) ATDPB26DD1P (1 PHASE) SIDE DOWN DRAFT - PAINT SPRAY BOOTH

- Heavy-duty precision punched 18 Ga. panel construction
- Inside Dimensions: 26" L x 14" W x 9' 3" H
- Deluxe control panel included
- Manometer, solenoid valve, hardware and sealant included
- (40 each) GE T-8 fluorescent lamps - 32W, 5000K, 48" length
- (2 each) UL Listed Dayton 24" Tube-Axial exhaust fans with spark-resistant fan blades
- Meets NFPA 33 Standards

- Optimal airflow with CFM 14,000 @ .5 static pressure
- Premium AFC intake and exhaust filters
- Personnel door with viewing window and shut off switch
- Nema rated 3 Hp, 3PH, 230V/460V AC, 60Hz motor standard
- Tri-fold entry doors with viewing windows and shut off switch
- (10 each) LDPI Industrial Lighting T-8, (4 bulb) "vertical" light fixtures



SIDE DOWN DRAFT PAINT SPRAY BOOTH	
Model Number	ATDPB26DD3P / ATDPB26DD1P
Inside Dimensions	26" L x 14" W x 9'-3" H
Outside Dimensions	26'-4" L x 17'-8" W x 9'-5" H
Fan / Motor	(2 ea.) 24" Tube-Axial Fans 2 Hp, 3PH, 230/460V AC, 60Hz, Non-Spark, NEMA Rated
CFM	14,000 @ .5 Static Pressure
Lighting	(10 ea.) T-8 (4 bulb) Light Fixtures
Options	Single Phase Electrical Configuration (ATDPB26DD1P); Canopy/Plenum (required for Booth Heater) (ATDPBC26DD); 8 ft. Exhaust Extension Kit, 25" Dia. (ATDPB25DK); Side Personnel Door Kit (ATDSDDSDK); 48" Solid Extension Kit (ATSD48EP); Drive Thru Door Kit (ATSDDDTDK); Gas Fired Booth Heater - 3 Phase (Plenum required) (ATDPBH3P); Gas Fired Booth Heater - 1 Phase (Plenum required) (ATDPBH1P); Electric Booth Heater - 3 Phase (ATDPBH30K3P); Electric Booth Heater - 1 Phase (ATDPBH30K1P)

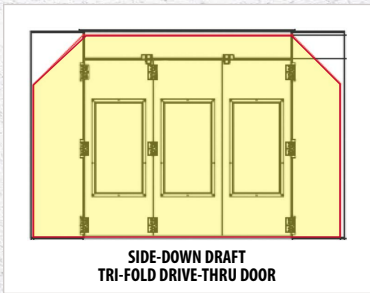

### ATSDDDTDK SIDE DOWN DRAFT TRI-FOLD, DRIVE-THRU DOOR KIT

- Allows drive-thru configuration for ATDPB26DD models
- Bright white powder coat door finish inside and outside
- Standard with integrated personnel door
- Viewing windows included
- Heavy-duty dual skin construction
- High quality hinges, pressure latch and handles
- Door activated shutoff switch
- Convenient 5/16" bolt and nut assembly
- Assembly hardware included

### ATDPBC26DD SIDE DOWN DRAFT PLENUM KIT

- Required when using direct "gas fired" air make up (heater) with paint booth
  - Can be installed to new or existing side down draft paint booths
  - Heavy-duty precision punched 18 Ga. panel construction
  - Bright white powder coat panel finish inside and out
  - Convenient 5/16" bolt and nut assembly
  - Assembly hardware and sealant included
- (shown on booth above)

### MORE OPTIONS AVAILABLE FOR SIDE DOWN DRAFT PAINT SPRAY BOOTHS:

- 48" EXTENSION PANEL KIT (ATSD48EP),
  - SIDE PERSONNEL DOOR KIT (ATSDSDK)
  - 8 FT. EXHAUST DUCT KIT, 25" DIA. (ATPB25DK)
- SEE PAGES 33-34 FOR MORE INFO...



### ATSDDLED SIDE- AND SEMI-DOWN LED LIGHTING UPGRADE KIT

- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000K CCT
- UL/ETL listed 120-277V AC (50/60Hz) electrical
- Direct replacement for standard fluorescent light fixtures

## ATDPBH3P (3 PHASE) ATDPBH1P (1 PHASE) DIRECT FIRED AMU HEATING SYSTEM

- Easy to operate and maintain
- Operates with natural gas or propane
- Variflow technology
- Exhaust VFD fused and wired
- Interlock status indicator lights
- White powder-coat finish (inside and out)
- Standard 3 Phase electrical (ATDPBH3P)
- Optional 1 Phase electric (ATDPBH1P)
- ETL Listed

- High quality, professional grade paint booth heating
- Deluxe control panel with hour meter and status messages
- Time displays for cycle time and elapsed time
- Vertical stand, filter box and filters included
- Single point connection with 30 ft. umbilical cord
- Vertical stand, filter box and filters included



ATDPBH3P


Includes vertical stand and filter box



### DIRECT FIRED AMU HEATING SYSTEMS

Model Number	ATDPBH3P (3 Phase)
Fuel	Natural Gas or Liquid Propane
BTUH	1.2M
Gas Train	1"
CFM	13,000
Intake Motor	230V, 10 Hp, 3 PH
Exhaust VFD	230V, 5 Hp, 3 PH
Ship Weight	1,395 lbs.
Paint Spray Booth Model Usage	Side Down and Semi-Down Draft (Plenum/Canopy Required)
Options*	Single Phase Electrical Configuration (ATDPBH1P)

\*Contact your distributor for full Single Phase configuration specifications...

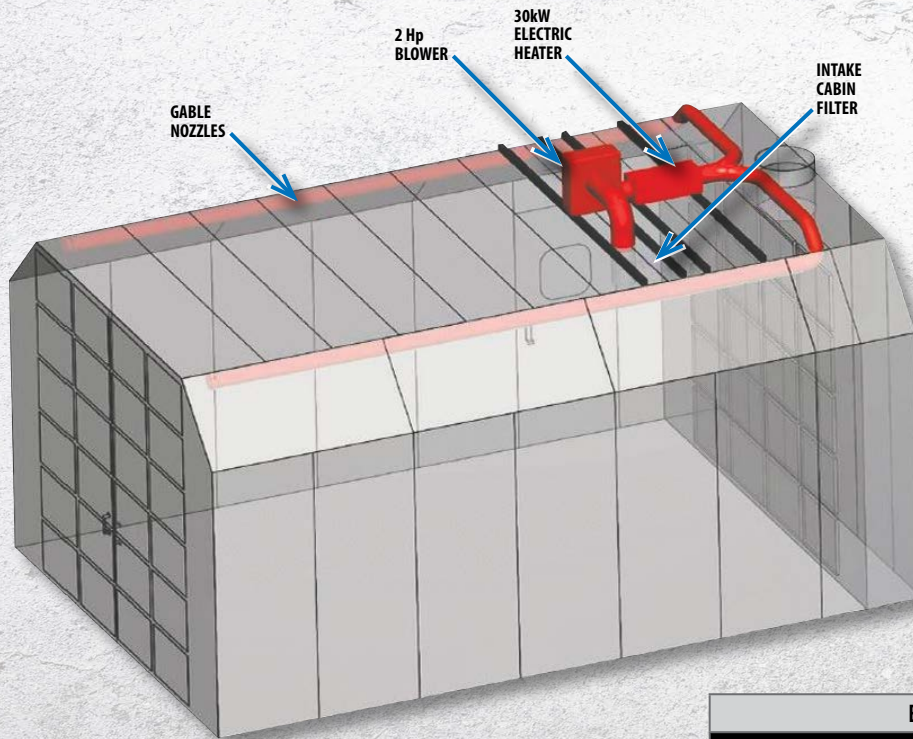

## ATDPBH30K3P (3 PHASE) ATDPBH30K1P (1 PHASE) ELECTRIC AMU HEATING SYSTEM

- Easy to operate and maintain
- Economical, energy efficient paint booth heating solution
- Deluxe control panel included
- Pre-heat, flash-off, spray and bake select modes
- Temperature Rise: 30° F in 10 minutes / 50° F in 50 minutes
- Single point connection with umbilical cord
- Intake filter and duct package included
- 2 Hp blower (208V AC or 230V AC, 3 PH, 6.3A)
- 30kW electric heater (208V AC or 230V AC, 3 PH, 85A)
- Unique pulsing mechanism with pneumatic actuators
- Standard 3 Phase electrical (ATDPBH30K3P)
- Optional 1 Phase electrical (ATDPBH30K1P)
- Patent Pending design

### ELECTRIC AMU HEATING SYSTEM

Model Number	ATDPBH30K3P (3 Phase)
Fuel	Electric
Blower Motor	2 Hp, 208V AC or 230V AC, 3 PH, 6.3A
Heating Element	30kW, 208V AC or 230V AC, 3 PH, 85A
Temperature Rise	Approx. 30° F in 30 minutes/50° F in 50 minutes
Ship Weight	560 lbs.
Paint Spray Booth Model Usage	Cross Flow, Side Down and Semi-Down Draft
Options*	Single Phase Electrical Configuration (ATDPBH30K1P)

\*Contact your distributor for full Single Phase configuration specifications...



# PAINT MIXING ROOMS




DELUXE PAINT MIXING ROOM		
Deluxe Paint Mixing Room	ATDPNTRM3	ATDPNTRM1
Outside Dimensions	12' 6" L x 8' 4" W x 9' 4" H	
Inside Dimensions	10' L x 8' W x 8' H or 8' L x 10' W x 8' H	
Fan/Motor	12" Tube Axial Fan, 1/2 Hp, 3 PH, 208-230/460V AC, 60Hz, Non-Spark, UL listed, NEMA Rated	12" Fan, 1/2 Hp, 1 PH, 208-230V AC, 60Hz, Non-Spark, UL listed, NEMA Rated
CFM	1,429 @ .5 Static Pressure	
Light Fixtures	(2 ea.) 48" 32-Watt T8, 4 bulb light fixtures; UL and ETL Listed; Class 1, Division 2 - Groups A, B, C & D	
Lamps	(8 ea.) T8 Fluorescent, 32-Watt, 5000K, 48" long	
Options	8 ft. Exhaust Duct Kit, 13" Dia. (ATDDUCT); Single Phase Electrical Configuration (ATDPNTRM1)	

## ATDPNTRM1 DELUXE PAINT MIXING ROOM - 1 PHASE


## ATDPNTRM3 DELUXE PAINT MIXING ROOM - 3 PHASE

- Commercial grade design for optimal airflow and lighting coverage
- Deluxe control panel included
- Bright white powder coat panel finish inside and outside
- Optional door placement to side or front of room
- Pre-hung 36" W personnel door with viewing window
- Heavy-duty precision punched 18 Ga. panel construction
- Convenient 5/16" bolt and serrated lock nut assembly
- UL Listed Dayton 12" Tube-Axial exhaust fan with spark-resistant fan blades
- NEMA rated 1/2 Hp, 3PH, 230/460V AC, 60Hz motor standard
- Premium AFC intake and exhaust filters
- LDPI Industrial light fixtures with inside access hinged glass door
- (2 each) LDPI Industrial (Class 1/Division2) light fixtures - UL and ETL (Groups A, B, C and D)
- True daylight color with GE T-8 48" fluorescent lamps 32W, 2900 lumens, 5000K
- Optimal air flow with CFM 1,429 @ .5 static pressure
- Inside Dimensions: 10' L x 8' W x 8' H
- Assembly hardware, manometer and sealant included
- Meets or exceeds all applicable OSHA and NFPA 33 regulations
- Easy to install, operate and maintain

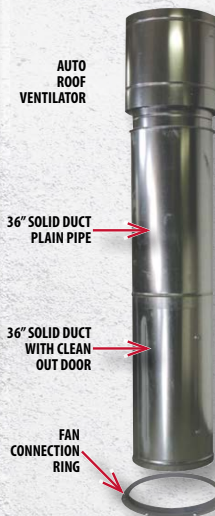

## ATDDUCT 13" X 8 FT. EXHAUST DUCT KIT FOR ATDPNTRM1 AND ATDPNTRM3

- Provides duct work to properly exhaust all ATD Paint Mixing Rooms
- 20 Ga. galvanized hammer seamed "plain pipe" ducting
- One duct end corrugated for easy assembly
- (1) Fan Connection Ring
- (1) 36" H x 13" Dia. Solid Duct with 32" H x 17" W clean out door
- (1) 36" H x 13" Dia. Solid "Center" Duct
- (1) 24" H x 13" Dia. Auto Roof Ventilator (ARV)
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section

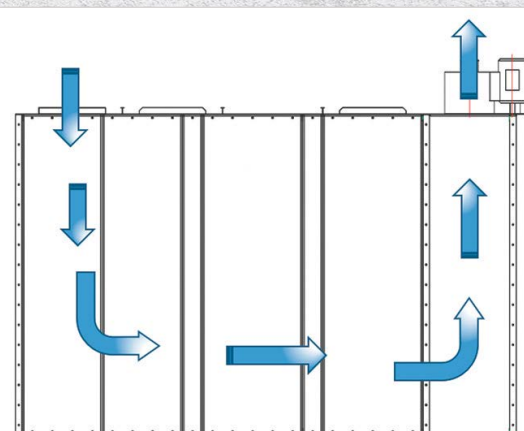

PAINT MIXING ROOM AIR FLOW DIAGRAM

## DURO POWER UNITS

- Superior performance and durability
- Electric/hydraulic operation
- **PU-220V-L-H includes overhead kill switch**
- Manual release valve
- Mounting hardware included
- Power Port 9/16"-18 O-ring
- Power cord with grounding plug on PU-110V-S-K and PU-110V-L-K
- Power cord (no plug) on PU-220V-L-H



**PU-110V-S-K**  
DURO 110V - SHORT TANK

**PU-110V-L-K**  
DURO 110V - LONG TANK

**PU-220V-L-H**  
DURO 220V - LONG TANK W/OVERHEAD KILL SWITCH

**PU-220V-L-H-X**  
DURO 220V - LONG TANK, NO CUT OFF



DURO Power Units	PU-110V-S-K	PU-110V-L-K	PU-220V-L-H	PU-220-L-H-X
<b>Power</b>	115V AC, 60Hz, 1 PH	115V AC, 60Hz, 1 PH	208-230V AC, 60Hz, 1 PH	208-230V AC, 60Hz, 1 PH
<b>Motor</b>	2.5 Hp	2.5 Hp	2.5 Hp	2.5 Hp
<b>Amps</b>	20	20	14.5-16.5	14.5-16.5
<b>RPM</b>	3450	3450	3450	3450
<b>PSI</b>	3050	3050	3050	3050
<b>Tank Capacity</b>	1.5 Gallon	3.5 Gallon	3.5 Gallon	3.5 Gallon

## DURO MET CERTIFIED POWER UNITS

- MET/UL/CSA Certified
  - Superior performance and durability
  - Electric/hydraulic operation
  - **PU-AC-220V-3.5-3050 includes overhead kill switch**
  - Mounting hardware included
  - Power Port 9/16"-18 O-ring
- Power cord with grounding plug on PU-AC-115V-1.5-3050 and PU-AC-115V-3.5-3050



**PU-AC-115V-1.5-3050**  
DURO MET CERTIFIED POWER UNIT  
115V AC - SHORT TANK

**PU-AC-115V-3.5-3050**  
DURO MET CERTIFIED POWER UNIT  
115V AC - LONG TANK

**PU-AC-220V-3.5-3050**  
DURO MET CERTIFIED POWER UNIT  
220V AC - LONG TANK, NO CUT OFF



DURO MET Certified Units	PU-AC-115V-1.5-3050	PU-AC-115V-3.5-3050	PU-AC-220V-3.5-3050
<b>Power</b>	115V AC, 60Hz, 1 PH	115V AC, 60Hz, 1 PH	208-230V AC, 60Hz, 1 PH
<b>Motor</b>	1.5 Hp	1.5 Hp	3 Hp
<b>Amps</b>	15	15	14-15
<b>RPM</b>	3450	3450	3450
<b>PSI</b>	3050	3050	3050
<b>Tank Capacity</b>	1.5 Gallon	3.5 Gallon	3.5 Gallon

## SPX ETL CERTIFIED POWER UNITS

- ETL/UL/CSA Certified
- Electric/hydraulic operation
- **PU-S-AB-1270 includes overhead kill switch**
- Manual release valve
- Mounting hardware included
- Power Port 9/16"-18 O-ring
- Power cord with grounding plug on PU-110V-S-S and PU-110V-L-S
- Power cord (no plug) on PU-S-AB-1270



**PU-110V-S-S**  
SPX ETL CERTIFIED POWER UNIT  
115V AC, SHORT TANK

**PU-110V-L-S**  
SPX ETL CERTIFIED POWER UNIT  
115V AC, LONG TANK

**PU-S-AB-1270**  
SPX ETL CERTIFIED POWER UNIT  
220V AC - LONG TANK W/ OVERHEAD KILL SWITCH




SPX ETL Certified Units	PU-110V-S-S	PU-110V-L-S	PU-S-AB-1270
<b>Power</b>	115V AC, 60Hz, 1PH	115V AC, 60Hz, 1PH	230V AC, 60Hz, 1PH
<b>Motor</b>	1 Hp	1 Hp	2 Hp
<b>Amps</b>	15	15	15-18
<b>RPM</b>	3450	3450	3450
<b>PSI</b>	2610	2610	2755
<b>Tank Capacity</b>	1.5 Gallon	3.5 Gallon	3.5 Gallon

# TABLE OF CONTENTS

Two Post Auto Lifts and Accessories.....2-7  
 ALL Certified Two Post Lifts and Accessories..... 2-3, 6  
 Four Post Auto Lifts and Accessories .....8-11  
 Alignment Machines .....12  
 Storage Lifts and Accessories ..... 13-15  
 Mobile Column Lifts and Accessories ..... 15, 18-19  
 ALL Certified Mobile Column Lifts and Accessories..... 18-19  
 Specialty Lifts.....15, 17  
 Scissor Lifts and Accessories..... 16  
 Tilt Lift and Accessories .....17  
 Wheel Balancers and Accessories ..... 20-21

Tire Changers and Accessories..... 22-24  
 Power Sport Tire Service.....27-28  
 Power Sport Lifts and Accessories..... 24-27  
 Car Rotisserie and Accessories.....29  
 Body Carts.....29  
 Frame Rack Machines and Accessories ..... 30-31  
 Paint Mixing Tables.....31  
 Paint Spray Booths and Accessories..... 32-34  
 Paint Booth Heat Units.....35  
 Paint Mixing Rooms and Accessories .....36  
 Power Units.....37

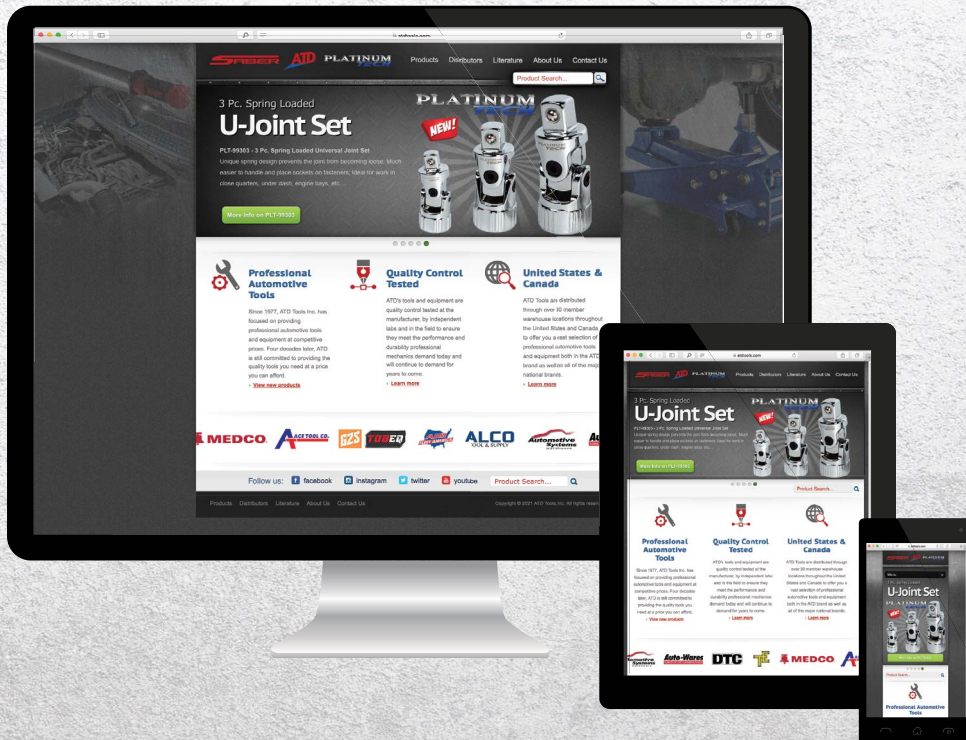

**VISIT US ONLINE**  
 TO VIEW THE FULL LINE OF PRODUCTS AVAILABLE

**www.atdtools.com**

# PART NUMBER INDEX

ATD5812A.....	31	ATDLSPA .....	24	ATDTCAL .....	22	RAJ-7K-H.....	11
ATD9905.....	24	ATDM1 .....	26	ATDTCE .....	23	RAJ-7K-L.....	11
ATD1P6 .....	13	ATDM15HR .....	26	ATDTCHD .....	22	TLT-11-AS-B .....	6
ATD2200XR.....	25	ATDM1FE .....	27	ATDTCHDPA.....	22	TLT211-AS-R .....	6
ATD2P10BSALI .....	2	ATDM1J .....	27	ATDTCHDT.....	22	TLT210-SPNCA.....	6
ATD2P11BS.....	3	ATDM1SE .....	27	ATDTCM .....	23	TLT210-XT-B.....	6
ATD2P11CA.....	3	ATDM1V .....	27	ATDTCMA .....	24	TLT210-XT-R.....	6
ATD2P11DXCA.....	3	ATDM2200 .....	24	ATDTCMAA .....	28	TLT240-SPNCA.....	7
ATD2P12CA.....	4, 5	ATDM2200AK .....	24	ATDTCMATV.....	28	TLT240SB-R .....	7
ATD2P12F.....	4	ATDM2200TK .....	25	ATDTCMM .....	23	TLT240SC-R.....	7
ATD2P12KXCA .....	4, 5	ATDM2200UK.....	22	ATDTCWB.....	27	TP12SDX-SPNCA .....	3
ATD2P12S.....	4	ATDM22DK.....	25	ATDTLTFLT .....	17	TURNTABLE-25-152 .....	9
ATD2P12SALI .....	2	ATDM22FE .....	25	ATDTLTFTFR.....	17	TURNTABLE-FP14KCX.....	11
ATD2P15S.....	5	ATDM22WC .....	27	ATDTS.....	24	TURNTABLE-FP14KCX-DK .....	11
ATD2P9A .....	4	ATDM22WV.....	27	ATD TSA.....	24	TURNTABLE-RBSPCR .....	11
ATD2P9CA.....	4, 5	ATDMSC13 .....	18	ATDU2200.....	25		
ATD2P9F.....	5	ATDMSC132 .....	18	ATDUFL2500 .....	26		
ATD2P9S.....	5	ATDMSC136 .....	18	ATDWB .....	20		
ATD4P12CA.....	8	ATDMSC18RC.....	18	ATDWBAB .....	20		
ATD4P14ALCH .....	9	ATDMSC6 .....	15	ATDWBAP .....	21		
ATD4P14ALOCA .....	9	ATDMSC6AK .....	15	ATDWBAS .....	21		
ATD4P14CH.....	8	ATDPB23CF1P .....	32	ATDWBAS .....	21		
ATD4P7AR .....	14	ATDPB23CF3P .....	32	ATDWBB .....	20		
ATD4P7JT .....	14	ATDPB25DK .....	32	ATDWBCB .....	20		
ATD4P8B .....	13	ATDPB26DD1P .....	34	ATDWBH .....	21		
ATD4P8C.....	14	ATDPB26DD3P .....	34	ATDWBH1 .....	21		
ATD4P8D .....	13	ATDPB26SDD1P .....	33	ATDWBHTC .....	21		
ATD4P8DT.....	14	ATDPB26SDD3P.....	33	ATDWBH .....	21		
ATD4P8DTXL .....	14	ATDPB31DK .....	33	ATDWBMA .....	20		
ATD4P8DXL.....	13	ATDPBC26DD .....	34	ATDWBTA .....	21		
ATD4P8SR.....	14	ATDPBC26SDD.....	33	ATDWBTA36.....	21		
ATD4P9DXL.....	13	ATDPBH1P .....	35	ATDWBTA40.....	21		
ATD90BK .....	14	ATDPBH30K1P .....	35	ATDWBTC.....	21		
ATDA2200 .....	25	ATDPBH30K3P .....	35	ATDWHLSTDKIT .....	26		
ATDAPAA .....	24	ATDPBH3P .....	35	ATDWWB .....	21		
ATDBC3 .....	29	ATDPL6.....	16	ATDWWDX .....	21		
ATDBC3A .....	29	ATDPL6AK.....	16	FP14KAC-X.....	10		
ATDCF30LE.....	32	ATDPL6HA .....	16	FP14KCX-ALIGNKIT .....	11		
ATDCF30SE.....	32	ATDPNTRM1.....	36	FP14KCX-ALK .....	11		
ATDCFLED .....	32	ATDPNTRM3.....	36	FP14KCX-24ALIGNSPCRKIT .....	11		
ATDCFPSDK.....	32	ATDPSMCT .....	31	FP14KCX-24EXTKIT .....	11		
ATDCR3 .....	29	ATDPSMTD .....	31	FP14KX.....	10		
ATDCR3ATWK .....	29	ATDPWL .....	20	IWA-60-8500-HD-K.....	12		
ATDCR3DB .....	29	ATDRAJ6H.....	8	MSC-18K-X-236 .....	19		
ATDCR3MFB .....	29	ATDRAJ6L .....	8	MSC-18K-X-472 .....	19		
ATDCR3MSB .....	29	ATDRAJ8H.....	8	MSC-18K-X-6108 .....	19		
ATDCR3SB.....	29	ATDRAJ8L .....	8	MSC-44K-STAND-26 .....	18		
ATDCR3UB .....	29	ATDRJ4500 .....	14	MSC-44K-STAND-46 .....	18		
ATDCR3VB .....	29	ATDSC2MA .....	15	MSC-FL-RAMPSET .....	18		
ATDDMS1.....	27	ATDSC2SL .....	15	MSC-FORKSPACER.....	19		
ATDDUCT .....	36	ATSDDD48EP .....	33	MSC-STAND18X .....	18		
ATDFR55S.....	30	ATSDDDDTDK .....	34	MSC18KX-CRSBM.....	19		
ATDFR55TCK .....	31	ATSDDDLED.....	33, 34	MSC18KX-LTVAK .....	19		
ATDFR7718S .....	30	ATSDSDSDK .....	33	PU-110V-L-K .....	37		
ATDFR7718T .....	30	ATDSJ3500.....	14	PU-110V-L-S.....	37		
ATDFR7720S .....	30	ATDSL6A .....	16	PU-110V-S-K.....	37		
ATDFR7720T .....	30	ATDSL6L .....	16	PU-110V-S-S .....	37		
ATDFR77TCK .....	31	ATDSL6M .....	16	PU-220V-L-H .....	37		
ATDFRABJ.....	31	ATDSL6MAK .....	16	PU-220V-L-H-X .....	37		
ATDFREW.....	31	ATDSL6PM .....	16	PU-AC-115V-1.5-3050 .....	37		
ATDFRMK.....	31	ATDSL6SAK .....	16	PU-AC-115V-3.5-3050 .....	37		
ATDIWA60 .....	12	ATDSL6TAK .....	16	PU-AC-220V-3.5-3050 .....	37		
		ATDTC.....	23	PU-S-AB-1270 .....	37		



**ATD**<sup>®</sup>



[www.atdtools.com](http://www.atdtools.com)



Call about our extensive parts inventory **877-558-9337**

©2022 ATD Tools, Inc. • 160 Enterprise Drive • Wentzville, MO 63385

*Specifications are subject to change without notice or liability*

**ATD-20110**



6 63126 20110 4